



Servo motors

MCS synchronous servo motor

Contents

About this document	5
Document description	5
Further documents	5
Notations and conventions	6
Product information	7
Product description	7
Identification of the products	8
Features	8
The modular system	9
Information on project planning	10
Safety instructions	10
Basic safety instructions	11
Application as directed	12
Foreseeable misuse	12
Residual hazards	13
Drive dimensioning	15
Final configuration	20
Surface and corrosion protection	20
Information on mechanical installation	21
Important notes	21
Transport	21
Installation	21
Information on electrical installation	22
Important notes	22
Preparation	22
Technical data	23
Notes regarding the given data	23
Standards and operating conditions	24
Conformities and approvals	24
Protection of persons and device protection	24
EMC data	24
Environmental conditions	25
Radial forces and axial forces	26
Rated data	28
Inverter mains connection 400 V, Self-ventilated motors	28
Inverter mains connection 400 V, Forced ventilated motors	34
Inverter mains connection 230 V, Self-ventilated motors	38
Selection tables	41
Torque characteristics	61
Dimensions	97
Basic dimensions	98
Additional lengths	106
Weights	107
Basic weights	107
Additional weights	107

Contents

Product extensions	108
Motor connection	108
Connection via terminal box	108
Connection via ICN connector	112
Brakes	121
Permanent magnet brakes	123
Feedback	125
Resolver	126
Absolute value encoder	127
Blower	129
Temperature monitoring	130
Thermal detectors PT1000	130
Product codes	132
Environmental notes and recycling	133
Appendix	134
Good to know	134
Approvals and directives	134
Operating modes of the motor	135
Enclosures	136



About this document

Document description

This document addresses to all persons who want to carry out any configurations with the products described.

The data and information compiled in this document serve to support you in the dimensioning and selection processes and in carrying out the electrical and mechanical installation. You will receive information regarding product extensions and accessories.

- The document includes safety instructions which must be observed.
- All persons working on and with the drives must have the documentation at hand during work and observe the information and notes relevant for it.
- The documentation must always be complete and in a perfectly readable state.

NOTICE

Please observe the notes in the following chapters!

- ▶ [Safety instructions](#) 10
- ▶ [Information on mechanical installation](#) 21
- ▶ [Information on electrical installation](#) 22

Further documents



Information and tools with regard to the Lenze products can be found on the Internet:

www.Lenze.com → Downloads





About this document

Notations and conventions



Notations and conventions

This document uses the following conventions to distinguish different types of information:

Numbers			
	Decimal separator	Point	In general, the decimal point is used. Example: 1 234.56
Warning			
	UL warning	UL	Are used in English and French.
	UR warning	UR	
Text			
	Programs	» «	Software Example: »Engineer«, »EASY Starter«
Icons			
	Page reference		Reference to another page with additional information Example:  16 = see page 16
	Documentation reference		Reference to another documentation with additional information Example:  EDKxxx = see documentation EDKxxx

Layout of the safety instructions

DANGER!

Indicates an extremely hazardous situation. Failure to comply with this instruction will result in severe irreparable injury and even death.

WARNING!

Indicates an extremely hazardous situation. Failure to comply with this instruction may result in severe irreparable injury and even death.

CAUTION!

Indicates a hazardous situation. Failure to comply with this instruction may result in slight to medium injury.

NOTICE

Indicates a material hazard. Failure to comply with this instruction may result in material damage.



Product information

Product description


The MCS synchronous servo motor for precisely controlled motion.

The compact synchronous servo motor for applications that require high dynamic performance, precision and compact dimensions. It can be used in the fields of positioning, robotics, and packaging technology as well as for handling systems.


In connection with the i700 and i950 servo inverters, Servo Drives 9400, and Inverter Drives 8400 TopLine, high-performance drive solutions in the torque range from 0.5 to 190 Nm can be obtained.

Customer benefit

- Compact design
- Optimum controllability and high dynamic performance thanks to low moments of inertia
- Optimal smooth running characteristics for exact work results
- The smooth housing surface makes it perfect for the use in the food industry
- Robust resolvers are included as a standard, and incremental encoders or absolute value encoders ensure a high precision
- Easy assembly and easy servicing by connectors with bayonet lock and swivel connector boxes
- Reduced cabling by One Cable Technology (OCT) in connection with digital absolute value encoders

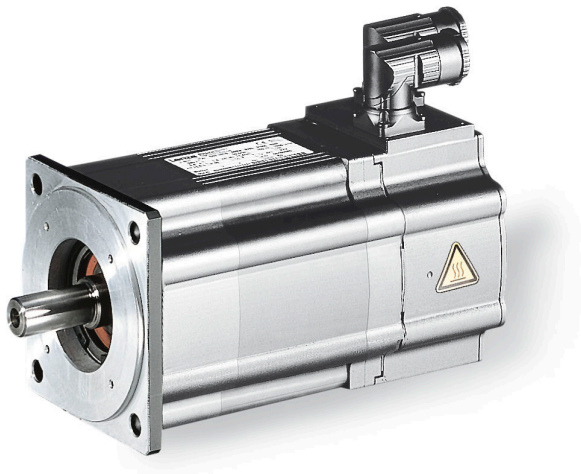

Synchronous servo motor MCS12L20-

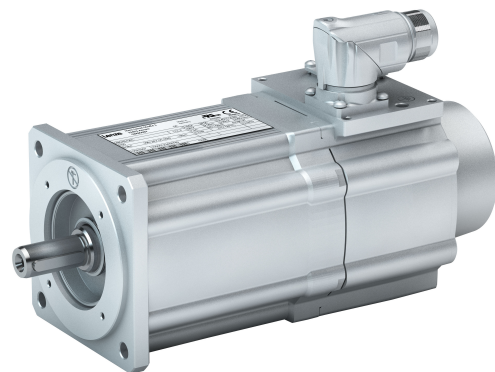

MCS09 synchronous servo motor with One Cable Technology (OCT) in connection with a digital absolute value encoder



Identification of the products

Product name: MCS synchronous servo motor

Meaning	Variant					
Product family		MCS				
Size			06 09 12 14 19			
Overall length				C ... P		
Rated speed	rpm x 100				11 ... 60	
Inverter mains connection	3 x 400 V					-
	3 x 230 V					L

Features

The following figure provides an overview of the elements and connections on the product.
Their position, size and appearance may vary.





The modular system



Values printed in bold are standard designs. Values that are not printed in bold are potential extensions, some of them including a surcharge.

Motor		MCS06	MCS09	MCS12	MCS14	MCS19
Technical data						
Rated power	kW	0.25 ... 0.75	1.0 ... 1.9	1.1 ... 5.7	1.45 ... 9.1	4.0 ... 15.8
Rated torque	Nm	0.6 ... 1.5	1.8 ... 4.5	4.3 ... 17	7.5 ... 42	21 ... 72
Max. torque	Nm	2.4 ... 6.2	9.5 ... 32	18 ... 56	29 ... 105	86 ... 190
Rated speed	rpm	4050 ... 6000	3750 ... 6000	1350 ... 4050	1050 ... 3600	1200 ... 3000
Color		Primed RAL9005 matt jet black RAL color				
Surface and corrosion protection		OKS-G Different types of OKS				
Output shaft						
Solid shaft with featherkey	mm	11 x 23	14 x 30	19 x 40	24 x 50	28 x 60
Solid shaft without keyway	mm	11 x 23	14 x 30	19 x 40	24 x 50	28 x 60
Shaft material		Steel				
Shaft sealing ring material		FKM				
Shaft seal		Standard Oil-proof				
Design		With flange (B5)				
Output flange	mm	FF75	FF100	FF130	FF165	FF215
Cooling		Self-ventilated IP54 Self-ventilated IP65 - Forced ventilated IP54				
Motor connection		ICN connector ICN hybrid connector for One Cable Technology (OCT) - Terminal box				
Permanent magnet holding brake		Without With				
Standard braking torque	Nm	2.0	6.0	10	18	32
Increased braking torque	Nm	-	10	19	32	80
DC brake voltage	V	24				
Feedback						
Without functional safety		Resolver Absolute value encoder Digital absolute value encoder for One Cable Technology (OCT)				
With functional safety		Resolver Absolute value encoder Digital absolute value encoder for One Cable Technology (OCT)				
Temperature monitoring		PT1000 temperature sensor	PT1000 temperature sensor and 2x PTC thermistor			



Information on project planning

Safety instructions

Disregarding the following basic safety measures and safety information may lead to severe personal injury and damage to property!

Observe all specifications of the corresponding documentation supplied. This is the precondition for safe and trouble-free operation and for obtaining the product features specified.

Please observe the specific safety information in the other sections!



Basic safety instructions

DANGER!

Dangerous electrical voltage

Possible consequences: Death or severe injuries from electric shock

- ▶ Any work on the device must only be carried out in a deenergized state.
- ▶ After switching off the mains voltage, observe the signs on the product.

Product

- The product must only be used as directed.
- Never commission the product in the event of visible damage.
- The product must never be technically modified.
- Never commission the product before assembly has been completed.
- The product must never be operated without required covers.
- Connect/disconnect all pluggable terminals only in de-energized condition.
- Only remove the product from the installation in the de-energized state.

Personnel

Only qualified and skilled personnel are allowed to work with the product. IEC 60364 and/or CENELEC HD 384 define the qualifications of these persons as follows:

- They are familiar with the installation, mounting, commissioning, and operation of the product.
- They possess the appropriate qualifications for their tasks.
- They are familiar with all regulations for the prevention of accidents, directives, and laws applicable at the location and are able to apply them.

Electrical connection

When working on energized products, comply with the applicable national accident prevention regulations.

The electrical installation work must be carried out according to the appropriate regulations (e.g. cable cross-sections, fusing, PE conductor connection). Additional information can be obtained from this documentation.

This documentation contains notes about installation according to EMC regulations. Also observe these notes for CE-marked products. The manufacturer of the system or machine is responsible for adherence to the limits required in connection with EMC legislation.

Operation

Where appropriate, you must equip the system with additional monitoring and protective devices. Comply with the safety regulations and other regulations applicable at the place of operation.

After disconnecting the product from the supply voltage, do not touch live device parts and power terminals immediately because capacitors may be charged. Observe the corresponding information labels on the product.

Dirt or dust deposits impede the heat dissipation and cooling. Remove any such deposits where appropriate at regular intervals.

Process engineering

The procedural notes and circuit details described are only proposals. It is up to the user to check whether they can be adapted to the particular applications. Lenze does not take any responsibility for the suitability of the procedures and circuit proposals described.

Disposal

The products and accessories must be properly disposed of in accordance with the applicable regulations. The products contain raw materials that can be recycled such as metals, plastics and electronic components.

Information on project planning

Safety instructions
Application as directed



Application as directed

NOTICE

Please observe the notes in the following chapters!

- ▶ [Safety instructions](#) 10
- ▶ [Information on mechanical installation](#) 21
- ▶ [Information on electrical installation](#) 22

- The product must only be actuated under the operating conditions and power limits specified in this documentation.
- The product meets the protection requirements of 2014/35/EU: Low-Voltage Directive.
- The product is not classed as a machine under 2006/42/EC: Machinery Directive.
- No machine is to be commissioned or put into operation as intended in conjunction with the product until it has been determined that the machine meets the regulations of EC Directive 2006/42/EC: Machinery Directive; observe EN 60204-1.
- Commissioning or putting into operation as intended is only permitted in compliance with the EMC Directive 2014/30/EU.
- The product is not a household appliance. Instead, it is a component that is intended exclusively for further use in the context of commercial or professional use as defined by EN 61000-3-2.
- The product can be used according to the technical data if the drive systems have to comply with categories in accordance with EN 61800-3.
- Do not use the built-in brakes as fail-safe brakes. Disruptive factors that cannot be influenced may cause the braking torque to be reduced.
- The product is only to be operated together with an inverter.
- The harmonized standards of the series IEC/EN60034 are used.

Foreseeable misuse

- Operate directly on the mains voltage
- Use in potentially explosive atmospheres
- Operate in aggressive environments (acids, gases, vapors, dusts, oils)
- Operate under water
- Operate under radiation
- Operate in generator mode



Residual hazards

Even if notes given are taken into consideration and protective measures are implemented, the occurrence of residual risks cannot be fully prevented.

The user must take the residual hazards mentioned into consideration in the risk assessment for his/her machine/system.

If the above is disregarded, this can lead to severe injuries to persons and damage to property!

Product

Observe the warning labels on the product!



Dangerous electrical voltage:

Before working on the product, make sure there is no voltage applied to the power terminals!

After mains disconnection, the power terminals will still carry the hazardous electrical voltage for the time given next to the symbol!



Electrostatic sensitive devices:

Before working on the product, the staff must ensure to be free of electrostatic charge!



High leakage current:

Carry out fixed installation and PE connection in compliance with:

EN 61800-5-1 / EN 60204-1



Hot surface:

Use personal protective equipment or wait until the device has cooled down!

Protection of persons

- The product does not provide any safety-related functions.
 - A higher-level safety system must be implemented.
 - Provide additional monitoring and protective equipment complying with the safety regulations applicable in each case.
- The power terminals may carry voltage in the switched-off state or when the motor is stopped.
 - Before working, check whether all power terminals are deenergized.
- Voltages may occur on the drive components (e.g. capacitive, caused by inverter supply).
 - Careful earthing must be carried out at the marked positions of the components.
- There is a risk of burns from hot surfaces!
 - Provide protection against accidental contact.
 - Use personal protective equipment or wait until the device has cooled down!
 - Prevent contact with flammable substances.
- Risk of injury from rotating parts.
 - Before working on the drive system, ensure that the motor is at a standstill.
- There is a danger of unintentional start-up or electric shocks!
- Installed brakes are no fail-safe brakes.
 - torque may be reduced by disruptive factors that cannot be influenced such as ingressing oil.

Information on project planning

Safety instructions
Residual hazards



Motor protection

- Version with plug:
 - Never disconnect the plug when energized. The plug could be destroyed.
 - Switch off the voltage supply or disable the inverter prior to disconnecting the plug.
- Installed thermal detectors are no full protection for the machine.
 - Limit the maximum current if necessary. Parameterize the inverter so that it will be switched off after several seconds of operation with $I > I_{\text{rated}}$ especially if there is a danger of blocking.
 - The integrated overload protection does not prevent overloading under all conditions.
- The fuses are no motor protection.
 - Use a current-dependent motor protection switch.
 - Use the built-in thermal detectors.
- Excessively high torques cause a fracture of the motor shaft.
 - Do not exceed the maximum torques according to the technical data on the nameplate.
- Lateral forces on the motor shaft are possible.
 - Align the shafts of motor and driven machine exactly to each other.



Drive dimensioning

In order to carry out an accurate drive dimensioning process, you can use our configuring software, the »Drive Solution Designer«.

With the »Drive Solution Designer«, you can design the drive both quickly and to a high quality. The software contains profound and proven expertise with regard to drive applications and mechatronic drive components.

Please get in touch with your Lenze representative.

The dimensioning is suitable for:

- kinematic profiles
- operating modes S1, S2, S3, S6 [135](#)
- simple linear speed profiles, not for S-curves or similar

The following 3 elements are taken into consideration in the dimensioning process:

Drive function

On the basis of the values required for the process that are specified, a drive is selected, for which all operating points are within the speed-torque characteristic curve of the motor.

As a result, a motor with a suitable speed and an inverter with a sufficient maximum current are selected. Further limits (maximum speed, installation height...) are specified in tables.

Mechanical strength

On the basis of the occurring forces and torques, a drive is selected that has a sufficient mechanical strength (endurance strength for the periodically occurring torques and fatigue strength for the sporadically occurring torques).

Thermal dimensioning

For the inverter, the thermal dimensioning process is carried out on the basis of the continuous inverter current or on the basis of the continuous torque from the motor-inverter combination, which can be reached.

The motor is thermally dimensioned on the basis of the mean speed and the effective torque.

The mean speed of the drive should not exceed the values specified.




If dimensioning processes are complex or reach limit loads, please refer to your Lenze representative.

Information on project planning

Drive dimensioning



Operation chart

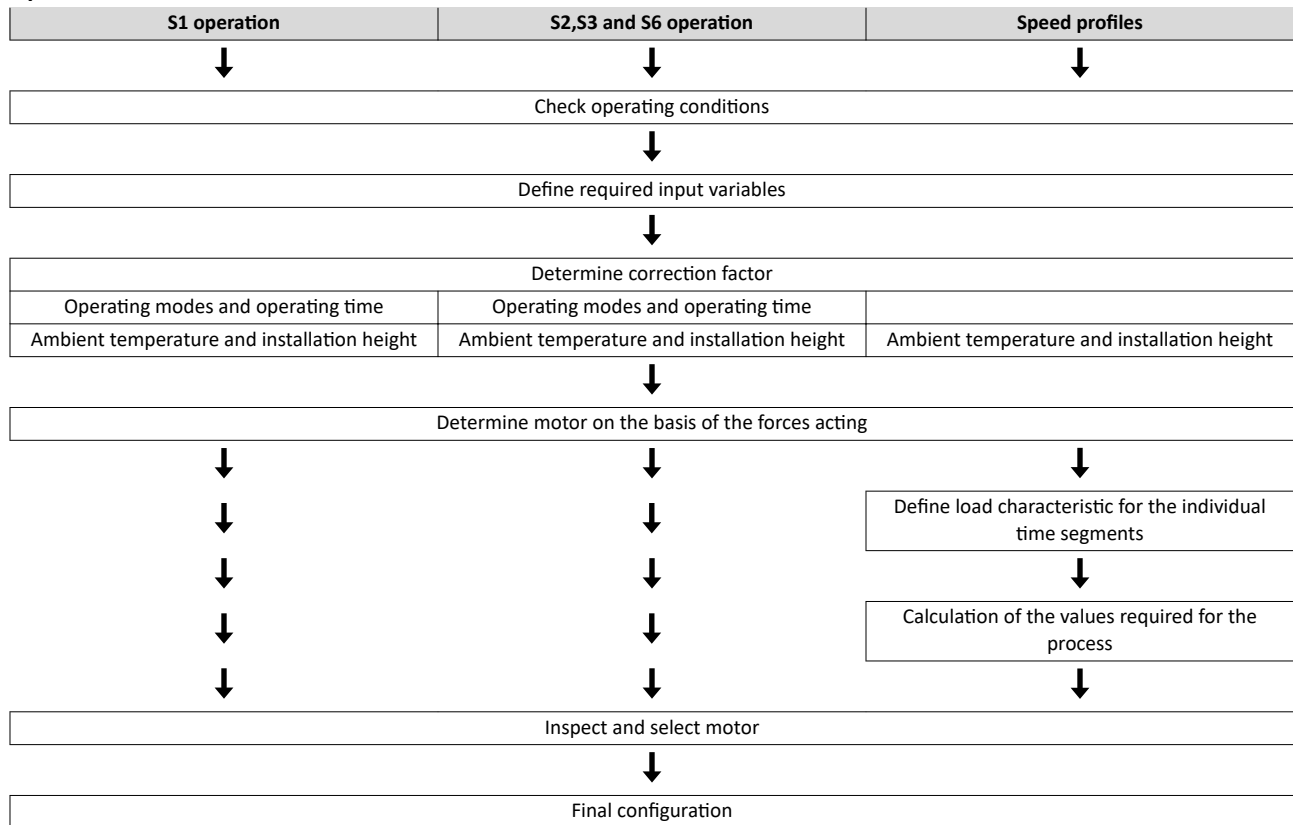

Check operating conditions

Check
Approvals Conformities Supply voltage Degree of protection Ambient temperature Surface protection

► [Standards and operating conditions](#) 24

► [Surface and corrosion protection](#) 20

Define required input variables

Necessary input variables	Note	Symbol	Unit
Mean speed utilisation	Relating to the load speed n_L		%
Ambient temperature		T_U	°C
Site altitude Amsl		H	m
Radial force		F_{rad}	N
Axial force		F_{ax}	N
Transmission element at the output	Gear wheels, sprockets ...		
Effective diameter of the transmission element		d_w	mm
Load torque	Only with S1, S2, S3, and S6 operating modes	M_L	Nm
Load speed	Only with S1, S2, S3, and S6 operating modes	n_L	rpm
Short-time maximum torque	Emergency off, quick stop, occasional high starting duty	$M_{L,max}$	Nm
Runtime with maximum torque		t_L	%



Determine correction factor

Operating modes S1, S2, S3, S6, and operating time							
Operating mode S1		Operating mode S2		Operating mode S3		Operating mode S6	
ED	k_L	ED	k_L	ED	k_L	ED	k_L
%		min		%		%	
100	1.0	10	1.4 - 1.5	15	1.4 - 1.5	15	1.5 - 1.6
		30	1.15 - 1.2	25	1.3 - 1.4	25	1.4 - 1.5
		60	1.07 - 1.1	40	1.15 - 1.2	40	1.3 - 1.4
		90	1.0 - 1.05	60	1.05 - 1.1	60	1.15 - 1.2

► Operating modes of the motor [135](#)

Ambient temperature and installation height				
Ambient temperature	Installation height amsl			
	≤ 1000 m	≤ 2000 m	≤ 3000 m	≤ 4000 m
	Correction factor			
T_U	k_H	k_H	k_H	k_H
≤ 20 °C	1.10	1.01	0.92	0.84
30 °C	1.05	0.97	0.88	0.80
40 °C	1.00	0.92	0.83	0.77
50 °C	0.92	0.85	0.76	0.70
60 °C	0.84	0.78	0.69	0.64

Determine product on the basis of the forces

Transmission element			Gear wheels	Sprockets	Toothed belt pulleys (depending on the preloading)	Narrow V-belt (depending on the preloading)
Additional radial force factor	f_z		≥ 17 teeth = 1.0	≥ 20 teeth = 1.0	With belt tightener= 2.0 - 2.5	1.5 - 2.0
			< 17 teeth = 1.15	< 20 teeth = 1.25	Without belt tightener= 2.5 - 3.0	
				< 13 teeth = 1.4		
			Calculation		Check	
Radial force	F_{rad}	N	$F_{rad} = 2000 \times \frac{M_{L,max} \times f_z}{dw}$		$F_{rad} \leq F_{rad,max}$	
Axial force	F_{ax}	N			$F_{ax} \leq F_{ax,max}$	

dw Effective diameter of transmission element

► Radial forces and axial forces [26](#)

Operating mode S1

Check and select servo motor/inverter combination			
	Check	Selection	Unit
Output torque	$M_{rated} \geq M_L / (k_L \times k_H)$	M_{rated}	Nm
Output speed	$n_{rated} \geq n_L$	n_{rated}	rpm

► Rated data [28](#)



Operating modes S2, S3, and S6

Check and select servo motor/inverter combination			
	Check	Selection	Unit
Output torque	$M_{rated} \geq M_L / (k_L \times k_H)$	M_{rated}	Nm
Output speed (recommendation)	$n_{rated} \geq n_L$	n_{rated}	rpm
Max. output torque.	$M_{max} \geq M_L$	M_{max}	Nm
Max. output speed	$n_{max} \geq n_L$	n_{max}	rpm
All operating points (●)		n_L	
below the maximum torque characteristic of the servo motor/inverter combination here, $M_{L,max}$ must be considered		M_L	
Thermally effective operating point (○)		n_L	
below the S1 torque characteristic of the servo motor		$M_L / (k_L \times k_H)$	

► [Rated data](#) 28

► [Torque characteristics](#) 61

Speed profiles

Temporal load characteristic for the individual time segments z							
Total time	Individual time segments	Load speed	Load speed variation	Steady-state load torque	Torque	Acceleration torque	Moment of inertia
t	Δt_z	$n_{L,z}$	$\Delta n_{L,z}$	$M_{L,z}$	M_z	$M_{s,z}$	J_L
s	s	rpm	rpm	Nm	Nm	Nm	kgcm ²

	Calculation	Symbol	Unit
Load cycle duration	$T = \sum \Delta t_z$	T	s

Calculation of the values required for the process			
	Calculation	Symbol	Unit
Torque per time segment	$M_z = M_{L,z} + J_L \frac{2\pi \times \Delta n_{L,z}}{60 \times \Delta t_z}$	M_z	Nm
Maximum torque of the profile	$M_{p,max} = \max(M_z)$	$M_{p,max}$	Nm
Effective torque	$M_{eff} = \sqrt{\frac{1}{T} \sum_z M_z^2 \times \Delta t_z}, T \leq 1 \text{ min}$	M_{eff}	Nm
Mean speed	$n_m = \overline{n_{L,z}} = \frac{1}{T} \sum_z n_{L,z} \times \Delta t_z$	n_m	rpm
Maximum load speed	$n_{L,max} = \max(n_{L,z})$	$n_{L,max}$	rpm



Check and select servo motor/inverter combination			
	Check	Preselection	Unit
Output torque	$M_{\text{rated}} > M_{\text{eff}} / k_H$	M_{rated}	Nm
Output speed	$n_{\text{rated}} \geq n_m$	n_{rated}	rpm
Load-matching factor			
for an optimum dynamic performance/ control properties	Requirement $k_j = 0.5 \dots 10$ Optimum $k_j = 1$	$k_j = J_L / (J_M + J_B)$	
Checking the motor torques			
Acceleration torque	$M_{S,z} = M_z + (J_M + J_B) \times \frac{2\pi \times \Delta n_{L,z}}{60 \times \Delta t_z}$	$M_{S,z}$	Nm
Effective torque	$M_{S,\text{eff}} = \sqrt{\frac{1}{T} \sum_z M_{S,z}^2 \times \Delta t_z}$	$M_{S,\text{eff}}$	
All operating points (●)		$n_{L,z}$	
below the maximum torque characteristic of the servo motor/ inverter combination here, $M_{L,\text{max}}$ must be considered		$M_{S,z}$	
Thermally effective operating point (○)		n_m	
below the S1 torque characteristic of the servo motor		$M_{S,\text{eff}} / k_H$	

► [Rated data](#) 28

► [Torque characteristics](#) 61

Information on project planning

Final configuration

Surface and corrosion protection



Final configuration

	Check
Connection dimensions	Output shaft Output flange
Product extensions	Motor connection (connector/terminal box) Brake Feedback Blower

More information about the final configuration:

► [The modular system](#) 9

► [Product extensions](#) 108

Surface and corrosion protection

Depending on the ambient conditions, the surface and corrosion protection system (called OKS) offers solutions for optimum protection.

Various surface coatings ensure that the motors operate reliably at high air humidity, in outdoor installation or in the presence of atmospheric impurities. Any color from the "RAL Classic" collection can be chosen for the top coat.

Surface and corrosion protection	Applications	Type
OKS-G (primed)	<ul style="list-style-type: none">Dependent on subsequent top coat applied	Standard
OKS-S (small)	<ul style="list-style-type: none">Standard applicationsInternal installation in heated buildingsAir humidity up to 90 %	Optional
OKS-M (medium)	<ul style="list-style-type: none">Internal installation in non-heated buildingsCovered, protected external installationAir humidity up to 95 %	
OKS-L (large)	<ul style="list-style-type: none">External installationAir humidity above 95 %Chemical industrial plantsFood industry	

Surface and corrosion protection	Corrosivity category	Surface coating	Color	Coating thickness
	DIN EN ISO 12944-2	Design		
OKS-G (primed)		<ul style="list-style-type: none">2K PUR priming coat	<ul style="list-style-type: none">RAL 9005 matt jet black	30 ... 40 µm
OKS-S (small)	Comparable to C1	<ul style="list-style-type: none">2K-PUR top coat	<ul style="list-style-type: none">According to RAL Classic	50 ... 70 µm
OKS-M (medium)	Comparable to C2	<ul style="list-style-type: none">2K PUR priming coat		80 ... 110 µm
OKS-L (large)	Comparable to C3	<ul style="list-style-type: none">2K-PUR top coat		110 ... 150 µm



Information on mechanical installation

Important notes

- Install the product according to the information in the chapter "Standards and operating conditions".
 - ▶ [Standards and operating conditions](#) 24
- The technical data and the data regarding the supply conditions can be found on the nameplate and in this documentation.
- Ambient media – especially chemically aggressive ones – may damage shaft sealing rings, lacquers and plastics.
- Lenze offers special surface and corrosion protection in this case.

NOTICE

Bearing damage caused by unbalance!

Shafts with keyway are balanced with a half featherkey!

▶ Balance transmission elements with a half featherkey!

Transport

- Ensure appropriate handling.
- Make sure that all component parts are securely mounted. Secure or remove loose component parts.
- Only use safely fixed transport aids (e.g., eye bolts or support plates).
- Do not damage any components during transport.
- Avoid electrostatic discharges on electronic components and contacts.
- Avoid impacts.
- Check the carrying capacity of the hoists and load handling devices. The weights can be found in the shipping documents.
- Secure the load against tipping and falling down.
- Standing beneath suspended loads is prohibited.

Installation

- The mounting surfaces must be plane, torsionally rigid and free from vibrations.
- The mounting areas must be suited to absorb the forces and torques generated during operation.
- Ensure an unhindered ventilation.
- For versions with a fan, keep a minimum distance of 10 % from the outside diameter of the fan cover in intake direction.



Information on electrical installation

Important notes

DANGER!

Risk of injury and risk of burns from dangerous voltage

Power terminals may also carry voltage in the switched-off state or when the motor is stopped and may cause life-threatening cardiac arrhythmia and serious burns.

- ▶ Disconnect the product from the mains.
- ▶ Check that the power terminals are deenergized before starting work.

- When working on energized products, comply with the applicable national accident prevention regulations.
- The electrical installation must be carried out according to the appropriate regulations (e.g. cable cross-sections, fuses, PE connection).
- The manufacturer of the system or machine is responsible for adherence to the limits required in connection with EMC legislation.

Operation on an external inverter

A max. pulse voltage amplitude of $U_{pk} = 1560 \text{ V}$ at the motor terminals must not be exceeded. Here, the minimum pulse rise time must be $t_R = 0.1 \text{ }\mu\text{s}$.

If it cannot be ruled out that the permissible voltage peaks will be exceeded or that the minimum pulse rise time will not be reached, the following measures must be initiated:

- Reduction of the DC-bus voltage (threshold for brake chopper voltage)
- Use of filters, chokes
- Use of special motor cables

Preparation



The notes for the electrical connection can be found in the enclosed mounting instructions.

EMC-compliant wiring



The EMC-compliant wiring is described in detail in the documentation of the Lenze inverters.



Technical data

Notes regarding the given data

The power values, torques and speeds specified in the configuration are rounded values and apply to:

- ambient temperature $T_U = 40\text{ °C}$ for motors (in compliance with EN 60034)
- Site altitude $\leq 1000\text{ m}$ above mean sea level

The selection tables specify the inverter/ motor combination with the achievable torques.

The rated data applies to the S1 operating mode S1 (in accordance with EN 60034) and the operation on a servo inverter with a switching frequency of at least 4 kHz.

NOTICE

In case of other operating conditions, the achievable values can differ for those mentioned.

► In case of extreme operating conditions, please get in touch with your Lenze representative.

Cooling effect of mounting flange

Mounting on a thermally conducting / insulating plate or machine chassis has an influence on heating up the motor, particularly when using naturally ventilated motors.

The motor rating data specified in the catalogue applies when mounting on a steel plate with free convection with the following dimensions:

Motor	Width	Height
	mm	mm
MCS06...	270	270
MCS09...	330	330
MCS12 ... 19	450	450

Technical data

Standards and operating conditions
Conformities and approvals



Standards and operating conditions

Conformities and approvals

Conformities		
CE	2011/65/EU	RoHS Directive
	2014/30/EU	EMC Directive (reference: CE-typical drive system)
	2014/35/EU	Low-Voltage Directive
EAC	TP TC 020/2011	Eurasian conformity: Electromagnetic compatibility of technical means
	TP TR 004/2011	Eurasian conformity: Safety of low voltage equipment

Approvals			
CEL	CEL 038-2020	Energy efficiency for China. Affected motors receive a separate label.	
cURus	-	UL 1004-1	for USA and Canada (requirements of the CSA 22.2 No. 100) servo motor, Lenze File No. E210321
UkrSepro		UL 1004-6	
		for Ukraine	

Protection of persons and device protection

Degree of protection			
EN	EN 60529, EN 60034-5	IP54	Information applies to the mounted and ready-for-use state
		IP65	

Temperature class			
Insulation system	EN 60034-1	F (155 °C)	Insulation system

Permissible voltage		
Limit curve A of the pulse voltage	IEC/TS 60034-25:2007	IEC/TS 60034-25:2007
IVIC C	IEC 60034-18-41	at 500 V

EMC data

Noise emission		
Fulfils requirements according to	EN 60034-1	A final overall assessment of the drive system is indispensable

Noise immunity		
Fulfils requirements according to	EN 60034-1	A final overall assessment of the drive system is indispensable



Technical data

Standards and operating conditions

Environmental conditions

Environmental conditions

Climate			
Storage	EN IEC 60721-3-1:1997	1K3 (-20 ... +40 °C)	>3 months
		1K3 (-20 ... +60 °C)	<3 months
Transport	EN IEC 60721-3-2:1997	2K3 (-20 ... +70 °C)	
Operation	EN IEC 60721-3-3:1995 + A2:1997	3K3 (-10 ... +40 °C)	Operation with brake
		3K3 (-15 ...+40 °C)	Operation without brake, forced ventilated
		3K3 (-20+40 °C)	Operation without brake, self-ventilated
Site altitude			
0 ... 1000 m amsl	-	without current derating	
1000 ... 4000 m amsl		Reduce rated output current by 5 %/1000 m	
Air humidity			
Without condensation	-	Average relative humidity 85 %	
Vibration resistance			
Operation	EN IEC 60721-3-3:1995 + A2:1997	3M5	only in operation with feedback AM20-8V-D or AM20-8V-D2
		3M6	
Vibration severity			
A	EN 60034-14	-	-
Vibration velocity			
Free suspension	-	1.6 mm/s	
Smooth running, axial runout, concentricity			
Normal class	EN 50347 / IEC 60072-1	-	-




Radial forces and axial forces



The values of the bearing service life L_{10h} refer to an average motor speed of 4000 rpm. Depending on the ambient temperatures, they are additionally limited by the grease lifetime.

► Rated data [28](#)

Application of forces

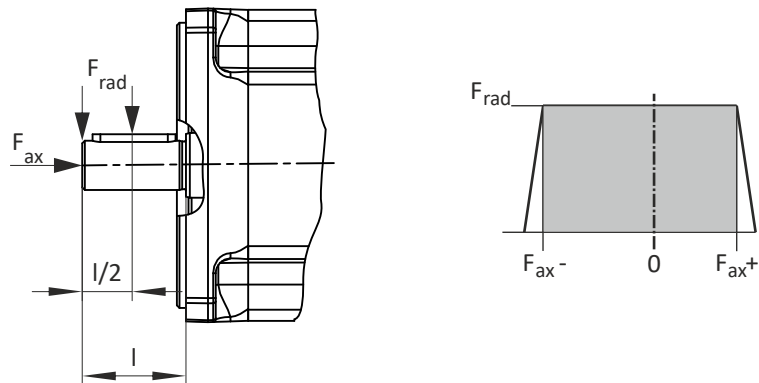

Application of force at $l/2$

Motor			MCS 06	MCS 09	MCS 12	MCS 14	MCS 19
Bearing service life 5000							
Radial force	F_{rad}	rated	740	1040	1030	1830	3840
Min. axial force	$F_{ax,-}$	rated	-260	-700	-880	-1150	-1550
Max. axial force	$F_{Fax,+}$	rated	140	470	560	720	950
Bearing service life 10000							
Radial force	F_{rad}	rated	590	830	820	1450	3050
Min. axial force	$F_{ax,-}$	rated	-210	-550	-690	-900	-1210
Max. axial force	$F_{Fax,+}$	rated	80	310	370	470	620
Bearing service life 20000							
Radial force	F_{rad}	rated	470	660	650	1150	2430
Min. axial force	$F_{ax,-}$	rated	-170	-440	-550	-720	-960
Max. axial force	$F_{Fax,+}$	rated	40	200	230	290	360
Bearing service life 30000							
Radial force	F_{rad}	rated	410	580	570	1010	2120
Min. axial force	$F_{ax,-}$	rated	-150	-380	-490	-640	-840
Max. axial force	$F_{Fax,+}$	rated	30	150	160	200	250
Bearing service life 50000							
Radial force	F_{rad}	rated	340	490	480	850	1790
Min. axial force	$F_{ax,-}$	rated	-140	-330	-420	-550	-730
Max. axial force	$F_{Fax,+}$	rated	10	90	100	120	130



Technical data

Radial forces and axial forces

Application of force at I

Motor			MCS 06	MCS 09	MCS 12	MCS 14	MCS 19
Bearing service life 5000							
Radial force	F_{rad}	rated	630	900	890	1590	3330
Min. axial force	$F_{ax,-}$	rated	-210	-630	-820	-1040	-1320
Max. axial force	$F_{Fax,+}$	rated	90	400	490	610	730
Bearing service life 10000							
Radial force	F_{rad}	rated	500	710	710	1260	2650
Min. axial force	$F_{ax,-}$	rated	-170	-500	-640	-820	-1040
Max. axial force	$F_{Fax,+}$	rated	50	260	320	390	450
Bearing service life 20000							
Radial force	F_{rad}	rated	400	570	560	1000	2100
Min. axial force	$F_{ax,-}$	rated	-140	-400	-520	-660	-830
Max. axial force	$F_{Fax,+}$	rated	20	160	190	230	240
Bearing service life 30000							
Radial force	F_{rad}	rated	350	500	490	880	1840
Min. axial force	$F_{ax,-}$	rated	-130	-350	-460	-580	-740
Max. axial force	$F_{Fax,+}$	rated	0	120	130	150	140
Bearing service life 50000							
Radial force	F_{rad}	rated	290	420	420	740	1550
Min. axial force	$F_{ax,-}$	rated	-120	-300	-400	-510	-640
Max. axial force	$F_{Fax,+}$	rated	-10	70	70	70	40

Technical data

Rated data

Inverter mains connection 400 V, Self-ventilated motors



Rated data

Inverter mains connection 400 V, Self-ventilated motors

Motor			MCS 06C60-	MCS 06C41-	MCS 06F60-	MCS 06F41-	MCS 06I60-	MCS 06I41-
Standstill torque	M_0	Nm	0.800	0.800	1.50	1.50	2.00	2.00
Rated torque	M_{rated}	Nm	0.500	0.600	0.900	1.20	1.20	1.50
Max. torque	M_{max}	Nm	2.40	2.40	4.40	4.40	6.20	6.20
Rated speed	n_{rated}	rpm	6000	4050	6000	4050	6000	4050
Max. speed	n_{max}	rpm	8000	8000	8000	8000	8000	8000
Rated power	P_{rated}	kW	0.31	0.25	0.57	0.51	0.75	0.64
Standstill current	I_0	A	2.50	1.30	2.90	1.50	3.40	1.70
Rated current	I_{rated}	A	2.40	1.30	2.50	1.50	2.90	1.60
Max. current	I_{max}	A	10.8	5.40	10.5	5.30	11.8	5.90
Rated voltage	V_{rated}	V	135	225	180	320	190	325
Rated frequency	f_{rated}	Hz	400	270	400	270	400	270
Moment of inertia	J	kgcm ²	0.140	0.140	0.220	0.220	0.300	0.300
Efficiency	η		0.7	0.65	0.81	0.77	0.84	0.81
Torque constant	$K_{t0\ 150}$ °C	Nm/A	0.320	0.615	0.517	1.00	0.588	1.18
Voltage constant	$K_{E\ LL\ 150}$ °C	V/ (1000/ min)	17.89	35.79	29.33	58.76	35.88	71.77
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	6.8	27	5.4	21.8	4.6	18.8
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	10.248	40.689	8.138	32.853	6.932	28.332
Stator inductance	L	mH	12.8	51.0	15.9	63.5	15.1	60.2
Weight	m	kg	2.30	2.30	2.70	2.70	3.40	3.40



Technical data

Rated data

Inverter mains connection 400 V, Self-ventilated motors

Motor			MCS 09D60-	MCS 09D41-	MCS 09F60-	MCS 09H60-	MCS 09F38-	MCS 09L51-
Standstill torque	M_0	Nm	3.30	3.30	4.20	5.50	4.20	7.50
Rated torque	M_{rated}	Nm	1.80	2.30	2.40	3.00	3.10	3.60
Max. torque	M_{max}	Nm	9.50	9.50	15.0	20.0	15.0	32.0
Rated speed	n_{rated}	rpm	6000	4050	6000	6000	3750	5100
Max. speed	n_{max}	rpm	7000	7000	7000	7000	7000	7000
Rated power	P_{rated}	kW	1.1	1	1.5	1.9	1.2	1.9
Standstill current	I_0	A	5.30	2.60	6.00	8.50	3.00	12.4
Rated current	I_{rated}	A	3.80	2.30	4.50	6.00	2.50	6.90
Max. current	I_{max}	A	20.0	10.0	30.0	40.0	15.0	64.0
Rated voltage	V_{rated}	V	210	320	230	190	330	180
Rated frequency	f_{rated}	Hz	400	270	400	400	250	340
Moment of inertia	J	kgcm ²	1.10	1.10	1.50	1.90	1.50	2.80
Efficiency	η		0.87	0.82	0.9	0.91	0.9	0.91
Torque constant	$K_{t_{0.150}}$ °C	Nm/A	0.623	1.27	0.700	0.647	1.40	0.605
Voltage constant	$K_{E_{LL150}}$ °C	V/ (1000/ min)	34.81	69.62	39.01	36.96	78.02	35.1
Stator terminal resistance	R_{UV20} °C	Ω	1.8	7	1.2	0.8	5.2	0.44
Stator terminal resistance	R_{UV150} °C	Ω	2.713	10.549	1.808	1.206	7.836	0.663
Stator inductance	L	mH	6.30	25.1	6.15	4.02	24.6	2.50
Weight	m	kg	4.80	4.80	5.70	6.60	5.70	8.40

Technical data

Rated data

Inverter mains connection 400 V, Self-ventilated motors



Motor			MCS 09H41-	MCS 09L41-	MCS 12D41-	MCS 12D20-	MCS 12H35-	MCS 12H15-
Standstill torque	M_0	Nm	5.50	7.50	6.40	6.40	11.4	11.4
Rated torque	M_{rated}	Nm	3.80	4.50	4.30	5.50	7.50	10.0
Max. torque	M_{max}	Nm	20.0	32.0	18.0	18.0	29.0	29.0
Rated speed	n_{rated}	rpm	4050	4050	4050	1950	3525	1500
Max. speed	n_{max}	rpm	7000	7000	6000	6000	6000	6000
Rated power	P_{rated}	kW	1.6	1.9	1.8	1.1	2.8	1.6
Standstill current	I_0	A	4.30	6.20	5.50	2.70	8.20	4.10
Rated current	I_{rated}	A	3.40	4.20	4.50	2.60	5.70	3.80
Max. current	I_{max}	A	20.0	32.0	20.0	10.0	24.0	12.0
Rated voltage	V_{rated}	V	300	295	310	345	325	300
Rated frequency	f_{rated}	Hz	270	270	270	130	235	100
Moment of inertia	J	kgcm ²	1.90	2.80	4.00	4.00	7.30	7.30
Efficiency	η		0.91	0.91	0.84	0.85	0.91	0.88
Torque constant	$K_{t_{0\ 150}}$ °C	Nm/A	1.28	1.21	1.16	2.37	1.39	2.78
Voltage constant	$K_{E_{LL\ 150}}$ °C	V/ (1000/ min)	74.02	70.1	67.07	133.95	84.58	169.15
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	3.2	1.8	2.2	8.7	1.4	5.8
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	4.822	2.713	3.315	13.111	2.11	8.741
Stator inductance	L	mH	16.1	9.90	13.0	52.2	10.5	42.1
Weight	m	kg	6.60	8.40	7	7	10.1	10.1



Technical data

Rated data

Inverter mains connection 400 V, Self-ventilated motors

Motor			MCS 12L41-	MCS 12L20-	MCS 14D36-	MCS 14D15-	MCS 14H32-	MCS 14H15-
Standstill torque	M_0	Nm	15.0	15.0	11.0	11.0	21.0	21.0
Rated torque	M_{rated}	Nm	11.0	13.5	7.50	9.20	14.0	16.0
Max. torque	M_{max}	Nm	56.0	56.0	29.0	29.0	55.0	55.0
Rated speed	n_{rated}	rpm	4050	1950	3600	1500	3225	1500
Max. speed	n_{max}	rpm	6000	6000	6000	6000	6000	6000
Rated power	P_{rated}	kW	4.7	2.8	2.8	1.45	4.7	2.5
Standstill current	I_0	A	12.4	6.20	10.0	5.00	16.9	8.50
Rated current	I_{rated}	A	10.2	5.90	7.50	4.50	11.9	6.60
Max. current	I_{max}	A	56.0	28.0	33.0	16.5	51.5	25.8
Rated voltage	V_{rated}	V	300	330	295	305	295	325
Rated frequency	f_{rated}	Hz	270	130	240	100	215	100
Moment of inertia	J	kgcm ²	10.6	10.6	8.10	8.10	14.2	14.2
Efficiency	η		0.91	0.9	0.92	0.88	0.93	0.92
Torque constant	$K_{t_{0\ 150}}^{\circ C}$	Nm/A	1.21	2.42	1.10	2.20	1.24	2.47
Voltage constant	$K_{E_{LL\ 150}}^{\circ C}$	V/ (1000/ min)	72.94	145.69	62.77	126.13	74.6	149.6
Stator terminal resistance	$R_{UV\ 20}^{\circ C}$	Ω	0.6	2.2	1	4	0.52	2.08
Stator terminal resistance	$R_{UV\ 150}^{\circ C}$	Ω	0.904	3.315	1.507	6.028	0.784	3.135
Stator inductance	L	mH	5.45	21.8	12.5	49.8	8.53	34.1
Weight	m	kg	13.2	13.2	11.4	11.4	16.2	16.2

Technical data

Rated data

Inverter mains connection 400 V, Self-ventilated motors



Motor			MCS 14L32-	MCS 14P32-	MCS 14L15-	MCS 14P14-	MCS 19F30-	MCS 19F14-
Standstill torque	M_0	Nm	28.0	37.0	28.0	37.0	32.0	32.0
Rated torque	M_{rated}	Nm	17.2	21.0	23.0	30.0	21.0	27.0
Max. torque	M_{max}	Nm	77.0	105	77.0	105	86.0	86.0
Rated speed	n_{rated}	rpm	3225	3225	1500	1350	3000	1425
Max. speed	n_{max}	rpm	6000	6000	6000	6000	4000	4000
Rated power	P_{rated}	kW	5.8	7.1	3.6	4.2	6.6	4
Standstill current	I_0	A	24.0	24.3	12.0	12.2	19.8	9.90
Rated current	I_{rated}	A	15.0	15.6	9.70	10.8	14.0	8.60
Max. current	I_{max}	A	74.5	92.0	37.3	46.0	62.5	31.3
Rated voltage	V_{rated}	V	275	315	315	340	300	335
Rated frequency	f_{rated}	Hz	215	215	100	90	200	95
Moment of inertia	J	kgcm ²	23.4	34.7	23.4	34.7	65.0	65.0
Efficiency	η		0.93	0.93	0.9	0.9	0.93	0.92
Torque constant	$K_{t_{0\ 150}}$ °C	Nm/A	1.17	1.52	2.33	3.03	1.62	3.23
Voltage constant	$K_{E_{LL\ 150}}$ °C	V/ (1000/ min)	74.5	87.41	148.62	175.02	95.04	190.66
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	0.4	0.28	1.2	1.2	0.32	1.3
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	0.603	0.422	1.808	1.808	0.482	1.959
Stator inductance	L	mH	5.51	5.99	22.0	23.9	5.20	20.8
Weight	m	kg	20.8	25.6	20.8	25.6	24	24



Technical data

Rated data

Inverter mains connection 400 V, Self-ventilated motors

Motor			MCS 19J30-	MCS 19P30-	MCS 19J14-	MCS 19P14-
Standstill torque	M_0	Nm	51.0	64.0	51.0	64.0
Rated torque	M_{rated}	Nm	29.0	32.0	40.0	51.0
Max. torque	M_{max}	Nm	129	190	129	190
Rated speed	n_{rated}	rpm	3000	3000	1425	1350
Max. speed	n_{max}	rpm	4000	4000	4000	4000
Rated power	P_{rated}	kW	9.1	10	6	7.2
Standstill current	I_0	A	30.5	34.9	15.2	17.5
Rated current	I_{rated}	A	18.5	19.0	12.3	14.3
Max. current	I_{max}	A	89.6	120	44.8	60.0
Rated voltage	V_{rated}	V	300	320	330	330
Rated frequency	f_{rated}	Hz	200	200	95	90
Moment of inertia	J	kgcm ²	105	160	105	160
Efficiency	η		0.93	0.93	0.92	0.92
Torque constant	$K_{t_{0\ 150}}$ °C	Nm/A	1.67	1.83	3.36	3.66
Voltage constant	$K_{E_{LL\ 150}}$ °C	V/ (1000/ min)	97.29	105.6	194.57	211.19
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	0.16	0.14	0.66	0.54
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	0.241	0.211	0.995	0.814
Stator inductance	L	mH	3.20	2.40	12.8	9.60
Weight	m	kg	31	41	31	41

Technical data

Rated data

Inverter mains connection 400 V, Forced ventilated motors



Inverter mains connection 400 V, Forced ventilated motors

Motor			MCS 12H34-	MCS 12H14-	MCS 12L39-	MCS 12L17-	MCS 12D35-	MCS 12D17-
Standstill torque	M_0	Nm	12.8	12.8	19.0	19.0	7.50	7.50
Rated torque	M_{rated}	Nm	10.5	12.0	14.0	17.0	6.00	7.00
Max. torque	M_{max}	Nm	29.0	29.0	56.4	56.4	17.7	17.7
Rated speed	n_{rated}	rpm	3375	1350	3900	1650	3525	1650
Max. speed	n_{max}	rpm	6000	6000	6000	6000	6000	6000
Rated power	P_{rated}	kW	3.7	1.7	5.7	2.9	2.2	1.2
Standstill current	I_0	A	8.50	4.60	14.4	7.20	6.40	3.20
Rated current	I_{rated}	A	7.50	4.10	11.7	6.70	5.60	3.00
Max. current	I_{max}	A	24.0	12.0	57.0	28.0	20.0	10.0
Rated voltage	V_{rated}	V	320	310	295	300	300	330
Rated frequency	f_{rated}	Hz	225	90	260	110	235	110
Moment of inertia	J	kgcm ²	7.30	7.30	10.6	10.6	4.00	4.00
Efficiency	η		0.86	0.8	0.94	0.9	0.85	0.75
Torque constant	$K_{t0\ 150}$ °C	Nm/A	1.51	2.78	1.32	2.64	1.17	2.34
Voltage constant	$K_{E\ LL\ 150}$ °C	V/ (1000/ min)	84.58	169.15	72.94	145.69	67.07	133.95
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	1.4	5.8	0.6	2.2	4.4	17.4
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	2.11	8.741	0.904	3.315	6.631	26.222
Stator inductance	L	mH	10.5	42.1	5.45	21.8	13.0	52.2
Weight	m	kg	12.2	12.2	15.3	15.3	9.1	9.1



Technical data

Rated data

Inverter mains connection 400 V, Forced ventilated motors

Motor			MCS 14D30-	MCS 14D14-	MCS 14H28-	MCS 14H12-	MCS 14L30-	MCS 14L14-
Standstill torque	M_0	Nm	12.5	12.5	25.5	25.5	34.5	34.5
Rated torque	M_{rated}	Nm	10.5	12.0	20.5	23.5	25.5	30.5
Max. torque	M_{max}	Nm	29.0	29.0	54.8	54.8	77.1	77.1
Rated speed	n_{rated}	rpm	3000	1350	2775	1200	3000	1350
Max. speed	n_{max}	rpm	6000	6000	6000	6000	6000	6000
Rated power	P_{rated}	kW	3.3	1.7	6	3	8	4.3
Standstill current	I_0	A	11.4	5.70	18.4	9.30	26.7	13.4
Rated current	I_{rated}	A	9.70	5.40	15.0	8.30	20.8	11.8
Max. current	I_{max}	A	33.0	16.5	51.5	25.8	74.5	37.3
Rated voltage	V_{rated}	V	325	345	325	335	310	335
Rated frequency	f_{rated}	Hz	200	90	185	80	200	90
Moment of inertia	J	kgcm ²	8.10	8.10	14.2	14.2	23.4	23.4
Efficiency	η		0.92	0.84	0.93	0.87	0.92	0.88
Torque constant	$K_{t_{0\ 150}}$ °C	Nm/A	1.10	2.19	1.39	2.74	1.29	2.57
Voltage constant	$K_{E_{LL\ 150}}$ °C	V/ (1000/ min)	62.77	126.13	74.6	149.6	74.5	148.62
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	1	4	0.52	2.08	0.4	1.2
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	1.507	6.028	0.784	3.135	0.603	1.808
Stator inductance	L	mH	12.5	49.8	8.53	34.1	5.51	22.0
Weight	m	kg	15.2	15.2	20.2	20.2	24.7	24.7

Technical data

Rated data

Inverter mains connection 400 V, Forced ventilated motors



Motor			MCS 14P26-	MCS 14P11-	MCS 19F29-	MCS 19F12-	MCS 19J29-	MCS 19P29-
Standstill torque	M_0	Nm	43.5	43.5	41.5	41.5	70.5	86.0
Rated torque	M_{rated}	Nm	33.0	42.0	32.5	38.0	50.5	53.0
Max. torque	M_{max}	Nm	105	105	86.0	86.0	129	190
Rated speed	n_{rated}	rpm	2625	1050	2850	1200	2850	2850
Max. speed	n_{max}	rpm	6000	6000	4000	4000	4000	4000
Rated power	P_{rated}	kW	9.1	4.6	9.7	4.8	15.1	15.8
Standstill current	I_0	A	28.3	14.1	24.5	12.2	40.6	44.7
Rated current	I_{rated}	A	21.9	13.4	20.1	11.3	31.0	29.5
Max. current	I_{max}	A	92.0	46.0	62.5	31.3	89.6	120
Rated voltage	V_{rated}	V	325	330	320	320	315	315
Rated frequency	f_{rated}	Hz	175	70	190	80	190	190
Moment of inertia	J	kgcm ²	34.7	34.7	65.0	65.0	105	160
Efficiency	η		0.92	0.86	0.95	0.9	0.93	0.93
Torque constant	$K_{t_{0\ 150}}$ °C	Nm/A	1.54	3.09	1.69	3.40	1.74	1.92
Voltage constant	$K_{E_{LL\ 150}}$ °C	V/ (1000/ min)	87.41	175.02	95.04	190.66	97.29	105.6
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	0.28	1.2	0.32	1.3	0.16	0.14
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	0.422	1.808	0.482	1.959	0.241	0.211
Stator inductance	L	mH	5.99	23.9	5.20	20.8	3.20	2.40
Weight	m	kg	29.7	29.7	30	30	37	47



Technical data

Rated data

Inverter mains connection 400 V, Forced ventilated motors

Motor			MCS 19J12-	MCS 19P12-
Standstill torque	M_0	Nm	70.5	86.0
Rated torque	M_{rated}	Nm	62.5	72.0
Max. torque	M_{max}	Nm	129	190
Rated speed	n_{rated}	rpm	1200	1200
Max. speed	n_{max}	rpm	4000	4000
Rated power	P_{rated}	kW	7.9	9
Standstill current	I_0	A	20.3	22.4
Rated current	I_{rated}	A	18.3	21.3
Max. current	I_{max}	A	44.8	60.0
Rated voltage	V_{rated}	V	320	310
Rated frequency	f_{rated}	Hz	80	80
Moment of inertia	J	kgcm ²	105	160
Efficiency	η		0.89	0.9
Torque constant	$K_{t0\ 150}$ °C	Nm/A	3.47	3.84
Voltage constant	$K_{E_{LL\ 150}}$ °C	V/ (1000/ min)	194.57	211.19
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	0.66	0.54
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	0.995	0.814
Stator inductance	L	mH	12.8	9.60
Weight	m	kg	37	47

Technical data

Rated data

Inverter mains connection 230 V, Self-ventilated motors



Inverter mains connection 230 V, Self-ventilated motors

Motor			MCS 06C60L	MCS 06C41L	MCS 06F60L	MCS 06F41L	MCS 06I60L	MCS 06I41L
Standstill torque	M_0	Nm	0.800	0.800	1.50	1.50	2.00	2.00
Rated torque	M_{rated}	Nm	0.500	0.600	0.900	1.20	1.20	1.50
Max. torque	M_{max}	Nm	2.40	2.40	4.40	4.40	6.20	6.20
Rated speed	n_{rated}	rpm	6000	4050	6000	4050	6000	4050
Max. speed	n_{max}	rpm	8000	8000	8000	8000	8000	8000
Rated power	P_{rated}	kW	0.31	0.25	0.57	0.51	0.75	0.64
Standstill current	I_0	A	4.30	2.50	3.80	2.90	4.20	3.10
Rated current	I_{rated}	A	4.00	2.50	3.40	2.90	3.60	2.90
Max. current	I_{max}	A	18.5	10.8	16.5	10.5	16.0	11.8
Rated voltage	V_{rated}	V	85	125	125	165	150	175
Rated frequency	f_{rated}	Hz	400	270	400	270	400	270
Moment of inertia	J	kgcm ²	0.140	0.140	0.220	0.220	0.300	0.300
Efficiency	η		0.7	0.65	0.82	0.81	0.84	0.81
Torque constant	$K_{t0\ 150}$ °C	Nm/A	0.186	0.320	0.395	0.517	0.476	0.645
Voltage constant	$K_{E\ LL\ 150}$ °C	V/ (1000/ min)	12.22	21.02	21.71	33.73	27.87	37.15
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	2.148	5.926	2.222	5.481	2.519	4.593
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	3.237	8.93	3.349	8.26	3.796	6.922
Stator inductance	L	mH	4.30	12.8	6.90	15.9	9.30	15.1
Weight	m	kg	2.30	2.30	2.70	2.70	3.40	3.40



Technical data

Rated data

Inverter mains connection 230 V, Self-ventilated motors

Motor			MCS 09D60L	MCS 09D41L	MCS 09F60L	MCS 09H60L	MCS 09F38L	MCS 09H41L
Standstill torque	M_0	Nm	3.30	3.30	4.20	5.50	4.20	5.50
Rated torque	M_{rated}	Nm	1.80	2.30	2.40	3.00	3.10	3.80
Max. torque	M_{max}	Nm	9.50	9.50	15.0	20.0	15.0	20.0
Rated speed	n_{rated}	rpm	6000	4050	6000	6000	3750	4050
Max. speed	n_{max}	rpm	7000	7000	7000	7000	7000	7000
Rated power	P_{rated}	kW	1.1	1	1.5	1.9	1.2	1.6
Standstill current	I_0	A	10.3	5.30	10.5	12.0	6.00	8.50
Rated current	I_{rated}	A	7.00	4.60	7.90	8.00	5.00	6.80
Max. current	I_{max}	A	39.0	20.0	52.5	57.0	30.0	40.0
Rated voltage	V_{rated}	V	110	165	125	145	160	160
Rated frequency	f_{rated}	Hz	400	270	400	400	250	270
Moment of inertia	J	kgcm ²	1.10	1.10	1.50	1.90	1.50	1.90
Efficiency	η		0.87	0.87	0.9	0.91	0.9	0.91
Torque constant	$K_{t_{0\ 150}}$ °C	Nm/A	0.320	0.623	0.400	0.458	0.700	0.647
Voltage constant	$K_{E_{LL\ 150}}$ °C	V/ (1000/ min)	17.89	34.81	22.29	26.01	39.01	36.96
Stator terminal resistance	$R_{UV\ 20}$ °C	Ω	0.45	1.75	0.415	0.356	1.333	0.889
Stator terminal resistance	$R_{UV\ 150}$ °C	Ω	0.678	2.637	0.625	0.536	2.009	1.34
Stator inductance	L	mH	1.70	6.30	2.00	2.00	6.20	4.00
Weight	m	kg	4.90	4.90	5.80	6.70	5.80	6.70

Technical data

Rated data

Inverter mains connection 230 V, Self-ventilated motors



Motor			MCS 09L41L	MCS 12H15L	MCS 12L20L	MCS 12D41L	MCS 12D20L	MCS 12H30L
Standstill torque	M_0	Nm	7.50	11.4	15.0	6.40	6.40	11.4
Rated torque	M_{rated}	Nm	4.50	10.0	13.5	4.30	5.50	8.00
Max. torque	M_{max}	Nm	32.0	29.0	56.0	18.0	18.0	29.0
Rated speed	n_{rated}	rpm	4050	1500	1950	4050	1950	3000
Max. speed	n_{max}	rpm	7000	6000	6000	6000	6000	6000
Rated power	P_{rated}	kW	1.9	1.6	2.8	1.8	1.1	2.5
Standstill current	I_0	A	12.4	8.20	12.4	10.7	5.50	13.5
Rated current	I_{rated}	A	8.40	7.60	11.8	8.80	5.20	10.5
Max. current	I_{max}	A	64.0	24.0	57.0	40.0	20.0	39.0
Rated voltage	V_{rated}	V	145	158	165	155	175	165
Rated frequency	f_{rated}	Hz	270	100	130	270	130	200
Moment of inertia	J	kgcm ²	2.80	7.30	10.6	4.00	4.00	7.30
Efficiency	η		0.91	0.86	0.9	0.84	0.85	0.87
Torque constant	$K_{t_{0\ 150}}^{\circ C}$	Nm/A	0.605	1.39	1.21	0.598	1.16	0.844
Voltage constant	$K_{E_{LL\ 150}}^{\circ C}$	V/(1000/min)	35.1	84.58	75.19	34.22	67.07	51.82
Stator terminal resistance	$R_{UV\ 20}^{\circ C}$	Ω	0.44	1.41	0.548	0.55	2.2	0.489
Stator terminal resistance	$R_{UV\ 150}^{\circ C}$	Ω	0.663	2.125	0.826	0.829	3.315	0.737
Stator inductance	L	mH	2.50	10.5	5.50	3.40	13.0	4.00
Weight	m	kg	8.50	10.2	13.3	7.10	7.10	10.2



Selection tables

Notes on the selection tables

The selection tables represent the combinations of servo motors and servo inverters. The serve as a rough overview.

In the case of the servo inverters, the overload capacity depending on the switching frequency in the default setting is taken into consideration. For more information, please refer to the inverter documentation.

Graphical representation of the operating points		Explanation	Notes
	M_0	Standstill torque	With a zero speed rpm, the standstill torque and standstill current are to be reduced by 30 % after 2 % seconds. For applications that require a longer holding of the standstill torque, it is recommended to hold the drive via the holding brake and, for instance, reducing the current by inverter disable.
	$M_{0,max}$	Max. standstill torque	With an active load observe (e. g. vertical drive axes, hoists, test benches, unwinders).
	M_N	Rated torque	
	n_N	Rated speed	
	M_{max}	Max. torque	Can usually be used with a passive load (e. g. horizontal drive axes).
	n_{eto}	Transition speed	
	n_k	Derating speed	Due to a derating of the inverter output current to the derating speed, for some inverters the achievable max. standstill torque is smaller than the max. speed when the value of 5 Hz is not reached.

Derating speed

Motor	Derating speed
	n_k
	rpm
MCS06	75
MCS09	
MCS12	
MCS14	
MCS19	



9400 HighLine servo drives



The following data apply to a mains voltage 3x 400 V and a switching frequency 4 kHz of the inverter.

MCS06, self-ventilated

Motor			Inverter		
			E94A□□		
			E0024	E0034	E0044
MCS06C41-					
Standstill torque	M ₀	Nm	0.8		
Rated torque	M _N	Nm	0.6		
Max. standstill torque	M _{0,max}	Nm	2.4		
Max. torque	M _{max}	Nm	2.4		
MCS06C60-					
Standstill torque	M ₀	Nm	0.6	0.8	
Rated torque	M _N	Nm	0.4	0.5	
Max. standstill torque	M _{0,max}	Nm	1.5	2.3	
Max. torque	M _{max}	Nm	1.5	2.3	
MCS06F41-					
Standstill torque	M ₀	Nm	1.5		
Rated torque	M _N	Nm	1.2		
Max. standstill torque	M _{0,max}	Nm	4.4		
Max. torque	M _{max}	Nm	4.4		
MCS06F60-					
Standstill torque	M ₀	Nm	1.0	1.5	
Rated torque	M _N	Nm	0.7	0.9	
Max. standstill torque	M _{0,max}	Nm	3.0	4.3	
Max. torque	M _{max}	Nm	3.0	4.3	
MCS06I41-					
Standstill torque	M ₀	Nm	2.0		
Rated torque	M _N	Nm	1.5		
Max. standstill torque	M _{0,max}	Nm	6.2		
Max. torque	M _{max}	Nm	6.2		
MCS06I60-					
Standstill torque	M ₀	Nm	1.1	1.8	2.0
Rated torque	M _N	Nm	0.8	1.2	1.2
Max. standstill torque	M _{0,max}	Nm	3.3	5.5	6.2
Max. torque	M _{max}	Nm	3.3	5.5	6.2



MCS09, self-ventilated

Motor			Inverter							
			E94A□□							
			E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244
MCS09D41-										
Standstill torque	M ₀	Nm	2.4	3.3						
Rated torque	M _N	Nm	1.9	2.3						
Max. standstill torque	M _{0,max}	Nm	6.3	9.5						
Max. torque	M _{max}	Nm	6.3	9.5						
MCS09D60-										
Standstill torque	M ₀	Nm			3.1	3.3				
Rated torque	M _N	Nm			1.8	1.8				
Max. standstill torque	M _{0,max}	Nm			8.0	9.5				
Max. torque	M _{max}	Nm			8.0	9.5				
MCS09F38-										
Standstill torque	M ₀	Nm		4.2	4.2					
Rated torque	M _N	Nm		3.1	3.1					
Max. standstill torque	M _{0,max}	Nm		11.6	14.9					
Max. torque	M _{max}	Nm		11.6	14.9					
MCS09F60-										
Standstill torque	M ₀	Nm			3.5	4.2	4.2	4.2		
Rated torque	M _N	Nm			2.4	2.4	2.4	2.4		
Max. standstill torque	M _{0,max}	Nm			9.8	12.0	14.4	14.9		
Max. torque	M _{max}	Nm			9.8	12.0	14.4	14.9		
MCS09H41-										
Standstill torque	M ₀	Nm		4.0	5.5	5.5				
Rated torque	M _N	Nm		3.5	3.8	3.8				
Max. standstill torque	M _{0,max}	Nm		12.0	17.5	20.4				
Max. torque	M _{max}	Nm		12.0	17.5	20.4				
MCS09H60-										
Standstill torque	M ₀	Nm				5.5	5.5	5.5	5.5	
Rated torque	M _N	Nm				3.0	3.0	3.0	3.0	
Max. standstill torque	M _{0,max}	Nm				12.5	15.8	20.1	20.4	
Max. torque	M _{max}	Nm				12.5	15.8	20.1	20.4	
MCS09L41-										
Standstill torque	M ₀	Nm			6.0	7.5	7.5			
Rated torque	M _N	Nm			4.5	4.5	4.5			
Max. standstill torque	M _{0,max}	Nm			17.4	22.2	28.5			
Max. torque	M _{max}	Nm			17.4	22.2	28.5			
MCS09L51-										
Standstill torque	M ₀	Nm				5.3	7.0	7.5	7.5	7.5
Rated torque	M _N	Nm				3.6	3.6	3.6	3.6	3.6
Max. standstill torque	M _{0,max}	Nm				11.9	15.5	20.9	25.8	29.7
Max. torque	M _{max}	Nm				11.9	15.5	20.9	25.8	29.7



MCS12, self-ventilated

Motor			Inverter							
			E94A□□							
			E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244
MCS12D20-										
Standstill torque	M ₀	Nm	4.4	6.4						
Rated torque	M _N	Nm	4.0	5.5						
Max. standstill torque	M _{0,max}	Nm	11.8	17.7						
Max. torque	M _{max}	Nm	11.8	17.7						
MCS12D41-										
Standstill torque	M ₀	Nm			5.9	6.4				
Rated torque	M _N	Nm			4.3	4.3				
Max. standstill torque	M _{0,max}	Nm			14.7	17.7				
Max. torque	M _{max}	Nm			14.7	17.7				
MCS12H15-										
Standstill torque	M ₀	Nm		8.7	11.4					
Rated torque	M _N	Nm		8.2	10.0					
Max. standstill torque	M _{0,max}	Nm		24.6	29.0					
Max. torque	M _{max}	Nm		24.6	29.0					
MCS12H35-										
Standstill torque	M ₀	Nm			7.0	11.4	11.4	11.4		
Rated torque	M _N	Nm			6.6	7.5	7.5	7.5		
Max. standstill torque	M _{0,max}	Nm			20.1	25.8	29.0	29.0		
Max. torque	M _{max}	Nm			20.1	25.8	29.0	29.0		
MCS12L20-										
Standstill torque	M ₀	Nm			12.1	15.0	15.0	15.0		
Rated torque	M _N	Nm			11.4	13.5	13.5	13.5		
Max. standstill torque	M _{0,max}	Nm			35.5	44.6	55.7	56.4		
Max. torque	M _{max}	Nm			35.5	44.6	55.7	56.4		
MCS12L41-										
Standstill torque	M ₀	Nm				10.6	14.0	15.0	15.0	15.0
Rated torque	M _N	Nm				9.5	11.0	11.0	11.0	11.0
Max. standstill torque	M _{0,max}	Nm				24.4	31.6	41.9	50.8	56.4
Max. torque	M _{max}	Nm				24.4	31.6	41.9	50.8	56.4



MCS12, forced ventilated

Motor			Inverter							
			E94A□□							
			E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244
MCS12D17-										
Standstill torque	M ₀	Nm	4.4	7.3						
Rated torque	M _N	Nm	4.0	7.0						
Max. standstill torque	M _{0,max}	Nm	11.8	17.7						
Max. torque	M _{max}	Nm	11.8	17.7						
MCS12D35-										
Standstill torque	M ₀	Nm			5.9	7.5				
Rated torque	M _N	Nm			5.4	6.0				
Max. standstill torque	M _{0,max}	Nm			14.7	17.7				
Max. torque	M _{max}	Nm			14.7	17.7				
MCS12H14-										
Standstill torque	M ₀	Nm		8.7	12.8					
Rated torque	M _N	Nm		8.2	12.0					
Max. standstill torque	M _{0,max}	Nm		24.6	29.0					
Max. torque	M _{max}	Nm		24.6	29.0					
MCS12H34-										
Standstill torque	M ₀	Nm			7.0	12.8	12.8	12.8		
Rated torque	M _N	Nm			6.6	10.5	10.5	10.5		
Max. standstill torque	M _{0,max}	Nm			20.1	25.8	29.0	29.0		
Max. torque	M _{max}	Nm			20.1	25.8	29.0	29.0		
MCS12L17-										
Standstill torque	M ₀	Nm			12.1	19.0	19.0	19.0		
Rated torque	M _N	Nm			11.4	17.0	17.0	17.0		
Max. standstill torque	M _{0,max}	Nm			35.5	44.6	55.7	56.4		
Max. torque	M _{max}	Nm			35.5	44.6	55.7	56.4		
MCS12L39-										
Standstill torque	M ₀	Nm				10.6	15.3	19.0	19.0	19.0
Rated torque	M _N	Nm				9.5	13.9	14.0	14.0	14.0
Max. standstill torque	M _{0,max}	Nm				24.4	31.6	41.9	50.8	56.4
Max. torque	M _{max}	Nm				24.4	31.6	41.9	50.8	56.4



MCS14, self-ventilated

Motor			Inverter							
			E94A□□							
			E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474
MCS14D15-										
Standstill torque	M ₀	Nm	11.0	11.0						
Rated torque	M _N	Nm	9.2	9.2						
Max. standstill torque	M _{0,max}	Nm	28.3	29.0						
Max. torque	M _{max}	Nm	28.3	29.0						
MCS14D36-										
Standstill torque	M ₀	Nm		9.6	11.0	11.0				
Rated torque	M _N	Nm		7.5	7.5	7.5				
Max. standstill torque	M _{0,max}	Nm		20.2	25.6	29.0				
Max. torque	M _{max}	Nm		20.2	25.6	29.0				
MCS14H15-										
Standstill torque	M ₀	Nm	12.4	21.0	21.0	21.0				
Rated torque	M _N	Nm	12.1	16.0	16.0	16.0				
Max. standstill torque	M _{0,max}	Nm	37.1	46.6	54.8	54.8				
Max. torque	M _{max}	Nm	37.1	46.6	54.8	54.8				
MCS14H32-										
Standstill torque	M ₀	Nm			14.4	20.3	21.0	21.0		
Rated torque	M _N	Nm			13.6	14.0	14.0	14.0		
Max. standstill torque	M _{0,max}	Nm			33.0	43.9	53.2	54.8		
Max. torque	M _{max}	Nm			33.0	43.9	53.2	54.8		
MCS14L15-										
Standstill torque	M ₀	Nm		20.5	27.1	28.0				
Rated torque	M _N	Nm		20.9	23.0	23.0				
Max. standstill torque	M _{0,max}	Nm		48.0	61.4	77.1				
Max. torque	M _{max}	Nm		48.0	61.4	77.1				
MCS14L32-										
Standstill torque	M ₀	Nm				19.0	24.0	28.0	28.0	28.0
Rated torque	M _N	Nm				17.2	17.2	17.2	17.2	17.2
Max. standstill torque	M _{0,max}	Nm				45.0	55.3	63.9	77.1	77.1
Max. torque	M _{max}	Nm				45.0	55.3	63.9	77.1	77.1
MCS14P14-										
Standstill torque	M ₀	Nm		26.7	35.2	37.0	37.0			
Rated torque	M _N	Nm		24.4	30.0	30.0	30.0			
Max. standstill torque	M _{0,max}	Nm		56.1	71.7	93.3	105.1			
Max. torque	M _{max}	Nm		56.1	71.7	93.3	105.1			
MCS14P32-										
Standstill torque	M ₀	Nm				24.8	31.4	37.0	37.0	37.0
Rated torque	M _N	Nm				21.0	21.0	21.0	21.0	21.0
Max. standstill torque	M _{0,max}	Nm				52.5	64.6	74.7	92.2	105.1
Max. torque	M _{max}	Nm				52.5	64.6	74.7	92.2	105.1



MCS14, forced ventilated

Motor			Inverter							
			E94A□□							
			E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474
MCS14D14-										
Standstill torque	M ₀	Nm	11.0	12.5						
Rated torque	M _N	Nm	11.0	12.0						
Max. standstill torque	M _{0,max}	Nm	28.3	29.0						
Max. torque	M _{max}	Nm	28.3	29.0						
MCS14D30-										
Standstill torque	M ₀	Nm		9.6	12.5	12.5				
Rated torque	M _N	Nm		9.5	10.5	10.5				
Max. standstill torque	M _{0,max}	Nm		20.2	25.6	29.0				
Max. torque	M _{max}	Nm		20.2	25.6	29.0				
MCS14H12-										
Standstill torque	M ₀	Nm	12.4	24.1	25.5	25.5				
Rated torque	M _N	Nm	12.1	23.5	23.5	23.5				
Max. standstill torque	M _{0,max}	Nm	37.1	46.6	54.8	54.8				
Max. torque	M _{max}	Nm	37.1	46.6	54.8	54.8				
MCS14H28-										
Standstill torque	M ₀	Nm			16.1	20.5	25.5	25.5		
Rated torque	M _N	Nm			15.9	20.5	20.5	20.5		
Max. standstill torque	M _{0,max}	Nm			33.0	43.9	53.2	54.8		
Max. torque	M _{max}	Nm			33.0	43.9	53.2	54.8		
MCS14L14-										
Standstill torque	M ₀	Nm		20.5	30.0	34.5				
Rated torque	M _N	Nm		20.5	30.0	30.5				
Max. standstill torque	M _{0,max}	Nm		48.0	61.4	77.1				
Max. torque	M _{max}	Nm		48.0	61.4	77.1				
MCS14L30-										
Standstill torque	M ₀	Nm				21.0	26.6	34.5	34.5	34.5
Rated torque	M _N	Nm				20.0	25.3	25.5	25.5	25.5
Max. standstill torque	M _{0,max}	Nm				45.0	55.3	63.9	77.1	77.1
Max. torque	M _{max}	Nm				45.0	55.3	63.9	77.1	77.1
MCS14P11-										
Standstill torque	M ₀	Nm		26.7	36.4	43.5	43.5			
Rated torque	M _N	Nm		24.4	36.4	42.0	42.0			
Max. standstill torque	M _{0,max}	Nm		56.1	71.7	93.3	105.1			
Max. torque	M _{max}	Nm		56.1	71.7	93.3	105.1			
MCS14P23-										
Standstill torque	M ₀	Nm				24.8	31.4	43.5	43.5	43.5
Rated torque	M _N	Nm				24.6	31.0	33.0	33.0	33.0
Max. standstill torque	M _{0,max}	Nm				52.5	64.6	74.7	92.2	105.1
Max. torque	M _{max}	Nm				52.5	64.6	74.7	92.2	105.1



MCS19, self-ventilated

Motor			Inverter							
			E94A□□							
			E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS19F14-										
Standstill torque	M ₀	Nm	28.4	32.0	32.0					
Rated torque	M _N	Nm	27.0	27.0	27.0					
Max. standstill torque	M _{0,max}	Nm	62.1	78.9	86.0					
Max. torque	M _{max}	Nm	62.1	78.9	86.0					
MCS19F30-										
Standstill torque	M ₀	Nm			26.3	32.0	32.0	32.0		
Rated torque	M _N	Nm			21.0	21.0	21.0	21.0		
Max. standstill torque	M _{0,max}	Nm			56.6	70.2	81.6	86.0		
Max. torque	M _{max}	Nm			56.6	70.2	81.6	86.0		
MCS19J14-										
Standstill torque	M ₀	Nm		38.9	51.0	51.0				
Rated torque	M _N	Nm		37.7	40.0	40.0				
Max. standstill torque	M _{0,max}	Nm		85.0	114.4	129.0				
Max. torque	M _{max}	Nm		85.0	114.4	129.0				
MCS19J30-										
Standstill torque	M ₀	Nm			27.3	34.4	49.2	51.0	51.0	
Rated torque	M _N	Nm			25.6	29.0	29.0	29.0	29.0	
Max. standstill torque	M _{0,max}	Nm			60.8	75.9	88.9	112.9	129.0	
Max. torque	M _{max}	Nm			60.8	75.9	88.9	112.9	129.0	
MCS19P14-										
Standstill torque	M ₀	Nm			59.6	64.0	64.0	64.0		
Rated torque	M _N	Nm			51.0	51.0	51.0	51.0		
Max. standstill torque	M _{0,max}	Nm			128.4	159.9	186.6	190.0		
Max. torque	M _{max}	Nm			128.4	159.9	186.6	190.0		
MCS19P30-										
Standstill torque	M ₀	Nm			29.9	37.8	53.9	64.0	64.0	64.0
Rated torque	M _N	Nm			27.5	32.0	32.0	32.0	32.0	32.0
Max. standstill torque	M _{0,max}	Nm			65.7	83.6	98.5	126.6	152.5	187.2
Max. torque	M _{max}	Nm			65.7	83.6	98.5	126.6	152.5	187.2



MCS19, forced ventilated

Motor			Inverter							
			E94A□□							
			E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS19F12-										
Standstill torque	M ₀	Nm	29.9	39.5	41.5					
Rated torque	M _N	Nm	29.3	38.0	38.0					
Max. standstill torque	M _{0,max}	Nm	62.1	78.9	86.0					
Max. torque	M _{max}	Nm	62.1	78.9	86.0					
MCS19F29-										
Standstill torque	M ₀	Nm			26.3	34.9	41.5	41.5		
Rated torque	M _N	Nm			26.0	32.5	32.5	32.5		
Max. standstill torque	M _{0,max}	Nm			56.6	70.2	81.6	86.0		
Max. torque	M _{max}	Nm			56.6	70.2	81.6	86.0		
MCS19J12-										
Standstill torque	M ₀	Nm			56.6	70.5				
Rated torque	M _N	Nm			55.7	62.5				
Max. standstill torque	M _{0,max}	Nm			114.4	129.0				
Max. torque	M _{max}	Nm			114.4	129.0				
MCS19J29-										
Standstill torque	M ₀	Nm					49.2	66.7	70.5	
Rated torque	M _N	Nm					47.9	50.5	50.5	
Max. standstill torque	M _{0,max}	Nm					88.9	112.9	129.0	
Max. torque	M _{max}	Nm					88.9	112.9	129.0	
MCS19P12-										
Standstill torque	M ₀	Nm				79.1	86.0	86.0		
Rated torque	M _N	Nm				69.6	72.0	72.0		
Max. standstill torque	M _{0,max}	Nm				159.9	186.6	190.0		
Max. torque	M _{max}	Nm				159.9	186.6	190.0		
MCS19P29-										
Standstill torque	M ₀	Nm					56.5	73.9	86.0	86.0
Rated torque	M _N	Nm					52.8	53.0	53.0	53.0
Max. standstill torque	M _{0,max}	Nm					98.5	126.6	152.5	187.2
Max. torque	M _{max}	Nm					98.5	126.6	152.5	187.2



The following data apply to a mains voltage 3x 230 V and a switching frequency 4 kHz of the inverter.

MCS06, self-ventilated

Motor			Inverter			
			E94A□□			
			E0024	E0034	E0044	E0074
MCS06C41L						
Standstill torque	M_0	Nm	0.6	0.8		
Rated torque	M_N	Nm	0.5	0.6		
Max. standstill torque	$M_{0,max}$	Nm	1.5	2.3		
Max. torque	M_{max}	Nm	1.5	2.3		
MCS06C60L						
Standstill torque	M_0	Nm		0.6	0.8	0.8
Rated torque	M_N	Nm		0.4	0.5	0.5
Max. standstill torque	$M_{0,max}$	Nm		1.5	2.2	2.4
Max. torque	M_{max}	Nm		1.5	2.2	2.4
MCS06F41L						
Standstill torque	M_0	Nm	1.0	1.5	1.5	
Rated torque	M_N	Nm	0.8	1.2	1.2	
Max. standstill torque	$M_{0,max}$	Nm	2.7	4.2	4.4	
Max. torque	M_{max}	Nm	2.7	4.2	4.4	
MCS06F60L						
Standstill torque	M_0	Nm		1.2	1.5	1.5
Rated torque	M_N	Nm		0.8	0.9	0.9
Max. standstill torque	$M_{0,max}$	Nm		3.1	4.3	4.4
Max. torque	M_{max}	Nm		3.1	4.3	4.4
MCS06I41L						
Standstill torque	M_0	Nm		2.0	2.0	
Rated torque	M_N	Nm		1.5	1.5	
Max. standstill torque	$M_{0,max}$	Nm		5.4	6.2	
Max. torque	M_{max}	Nm		5.4	6.2	
MCS06I60L						
Standstill torque	M_0	Nm		1.5	2.0	
Rated torque	M_N	Nm		1.0	1.2	
Max. standstill torque	$M_{0,max}$	Nm		4.4	6.2	
Max. torque	M_{max}	Nm		4.4	6.2	



MCS09, self-ventilated

Motor			Inverter						
			E94A□□						
			E0044	E0074	E0094	E0134	E0174	E0244	E0324
MCS09D41L									
Standstill torque	M_0	Nm	3.1	3.3					
Rated torque	M_N	Nm	2.3	2.3					
Max. standstill torque	$M_{0,max}$	Nm	8.0	9.5					
Max. torque	M_{max}	Nm	8.0	9.5					
MCS09D60L									
Standstill torque	M_0	Nm		2.8	3.3	3.3			
Rated torque	M_N	Nm		1.8	1.8	1.8			
Max. standstill torque	$M_{0,max}$	Nm		5.7	7.3	9.5			
Max. torque	M_{max}	Nm		5.7	7.3	9.5			
MCS09F38L									
Standstill torque	M_0	Nm	3.5	4.2	4.2	4.2			
Rated torque	M_N	Nm	3.1	3.1	3.1	3.1			
Max. standstill torque	$M_{0,max}$	Nm	9.8	12.0	13.8	15.0			
Max. torque	M_{max}	Nm	9.8	12.0	13.8	15.0			
MCS09F60L									
Standstill torque	M_0	Nm		3.5	4.2	4.2	4.2	4.2	
Rated torque	M_N	Nm		2.4	2.4	2.4	2.4	2.4	
Max. standstill torque	$M_{0,max}$	Nm		7.8	9.8	12.6	14.5	15.0	
Max. torque	M_{max}	Nm		7.8	9.8	12.6	14.5	15.0	
MCS09H41L									
Standstill torque	M_0	Nm		5.5	5.3	5.5	5.5		
Rated torque	M_N	Nm		3.8	3.0	3.8	3.8		
Max. standstill torque	$M_{0,max}$	Nm		12.4	11.8	19.7	20.0		
Max. torque	M_{max}	Nm		12.4	11.8	19.7	20.0		
MCS09H60L									
Standstill torque	M_0	Nm		4.0	5.5	5.5	5.5	5.5	
Rated torque	M_N	Nm		3.0	3.8	3.0	3.0	3.0	
Max. standstill torque	$M_{0,max}$	Nm		9.2	15.6	15.4	18.3	20.0	
Max. torque	M_{max}	Nm		9.2	15.6	15.4	18.3	20.0	
MCS09L41L									
Standstill torque	M_0	Nm		5.3	7.0	7.5	7.5	7.5	7.5
Rated torque	M_N	Nm		4.5	4.5	4.5	4.5	4.5	4.5
Max. standstill torque	$M_{0,max}$	Nm		11.9	15.5	20.9	25.8	29.7	31.9
Max. torque	M_{max}	Nm		11.9	15.5	20.9	25.8	29.7	31.9



MCS12, self-ventilated

Motor			Inverter					
			E94A□□					
			E0044	E0074	E0094	E0134	E0174	E0244
MCS12D20L								
Standstill torque	M ₀	Nm	5.9	6.4				
Rated torque	M _N	Nm	5.3	5.5				
Max. standstill torque	M _{0,max}	Nm	14.9	17.7				
Max. torque	M _{max}	Nm	14.9	17.7				
MCS12D41L								
Standstill torque	M ₀	Nm		5.3	6.4	6.4	6.4	
Rated torque	M _N	Nm		4.3	4.3	4.3	4.3	
Max. standstill torque	M _{0,max}	Nm		10.6	13.6	17.7	17.9	
Max. torque	M _{max}	Nm		10.6	13.6	17.7	17.9	
MCS12H15L								
Standstill torque	M ₀	Nm		11.4	11.4	10.0		
Rated torque	M _N	Nm		10.0	10.0	11.4		
Max. standstill torque	M _{0,max}	Nm		25.8	29.0	29.0		
Max. torque	M _{max}	Nm		25.8	29.0	29.0		
MCS12H30L								
Standstill torque	M ₀	Nm		7.4	9.8	11.4		
Rated torque	M _N	Nm		6.7	8.0	8.0		
Max. standstill torque	M _{0,max}	Nm		16.4	21.5	29.0		
Max. torque	M _{max}	Nm		16.4	21.5	29.0		
MCS12L20L								
Standstill torque	M ₀	Nm		10.6	14.0	15.0	15.0	15.0
Rated torque	M _N	Nm		10.1	13.3	13.5	13.5	13.5
Max. standstill torque	M _{0,max}	Nm		24.4	31.5	41.8	50.5	56.0
Max. torque	M _{max}	Nm		24.4	31.5	41.8	50.5	56.0



8400 TopLine inverter drives



The following data apply to a mains voltage 3x 400 V and a switching frequency 8 kHz of the inverter.

MCS06, self-ventilated

Motor			Inverter						
			E84AVTC□						
			3714	5514	7514	1124	1524	2224	3024
MCS06C41-									
Standstill torque	M ₀	Nm	0.8	0.8	0.8	0.8	0.8		
Rated torque	M _N	Nm	0.6	0.6	0.6	0.6	0.6		
Max. standstill torque	M _{0,max}	Nm	1.4	1.7	2.3	2.4	2.4		
Max. torque	M _{max}	Nm	1.4	1.7	2.3	2.4	2.4		
MCS06C60-									
Standstill torque	M ₀	Nm			0.8	0.8	0.8	0.8	0.8
Rated torque	M _N	Nm			0.5	0.5	0.5	0.5	0.5
Max. standstill torque	M _{0,max}	Nm			1.3	1.6	2.0	2.4	2.4
Max. torque	M _{max}	Nm			1.3	1.6	2.0	2.4	2.4
MCS06F41-									
Standstill torque	M ₀	Nm	1.3	1.5	1.5	1.5	1.5		
Rated torque	M _N	Nm	1.0	1.2	1.2	1.2	1.2		
Max. standstill torque	M _{0,max}	Nm	2.3	3.2	4.3	4.4	4.4		
Max. torque	M _{max}	Nm	2.3	3.2	4.3	4.4	4.4		
MCS06F60-									
Standstill torque	M ₀	Nm			1.2	1.5	1.5	1.5	1.5
Rated torque	M _N	Nm			0.9	0.9	0.9	0.9	0.9
Max. standstill torque	M _{0,max}	Nm			2.1	3.3	4.0	4.4	4.4
Max. torque	M _{max}	Nm			2.1	2.0	2.4	3.3	3.3
MCS06I41-									
Standstill torque	M ₀	Nm	1.6	2.0	2.0	2.0	2.0		
Rated torque	M _N	Nm	1.2	1.5	1.5	1.5	1.5		
Max. standstill torque	M _{0,max}	Nm	2.9	4.0	5.3	6.2	6.2		
Max. torque	M _{max}	Nm	2.9	4.0	5.3	6.2	6.2		
MCS06I60-									
Standstill torque	M ₀	Nm				2.0	2.0	2.0	2.0
Rated torque	M _N	Nm				1.2	1.2	1.2	1.2
Max. standstill torque	M _{0,max}	Nm				3.6	4.4	5.7	5.7
Max. torque	M _{max}	Nm				3.6	4.4	5.7	5.7



MCS09, self-ventilated

Motor			Inverter									
			E84AVTC□									
			5514	7514	1124	1524	2224	3024	4024	5524	7524	1134
MCS09D41-												
Standstill torque	M ₀	Nm	2.2	3.1	3.3	3.3	3.3	3.3				
Rated torque	M _N	Nm	1.7	2.3	2.3	2.3	2.3	2.3				
Max. standstill torque	M _{0,max}	Nm	4.0	5.3	6.7	8.2	9.4	9.4				
Max. torque	M _{max}	Nm	4.0	5.3	6.7	8.2	9.4	9.4				
MCS09D60-												
Standstill torque	M ₀	Nm			2.0	2.4	3.3	3.3	1.8	1.8		
Rated torque	M _N	Nm			1.5	1.8	1.8	1.8	3.3	3.3		
Max. standstill torque	M _{0,max}	Nm			3.5	4.2	6.3	7.8	9.1	9.3		
Max. torque	M _{max}	Nm			3.5	4.2	6.3	7.8	9.1	9.3		
MCS09F38-												
Standstill torque	M ₀	Nm		3.4	4.2	4.2	4.2	4.2				
Rated torque	M _N	Nm		3.0	3.1	3.1	3.1	3.1				
Max. standstill torque	M _{0,max}	Nm		6.6	8.4	10.2	12.0	12.0				
Max. torque	M _{max}	Nm		6.6	8.4	10.2	12.0	12.0				
MCS09F60-												
Standstill torque	M ₀	Nm					4.2	4.2	4.2	4.2		
Rated torque	M _N	Nm					2.4	2.4	2.4	2.4		
Max. standstill torque	M _{0,max}	Nm					7.8	9.6	11.1	11.4		
Max. torque	M _{max}	Nm					7.8	9.6	11.1	11.4		
MCS09H41-												
Standstill torque	M ₀	Nm			4.7	5.0	5.5	5.5	5.5	5.5		
Rated torque	M _N	Nm			3.6	3.8	3.8	3.8	3.8	3.8		
Max. standstill torque	M _{0,max}	Nm			8.1	9.9	14.0	17.4	19.6	20.1		
Max. torque	M _{max}	Nm			8.1	9.9	14.0	17.4	19.6	20.1		
MCS09H60-												
Standstill torque	M ₀	Nm					4.4	4.5	5.5	5.5		
Rated torque	M _N	Nm					3.0	3.0	3.0	3.0		
Max. standstill torque	M _{0,max}	Nm					7.5	9.3	11.4	11.7		
Max. torque	M _{max}	Nm					7.5	9.3	11.4	11.7		
MCS09L41-												
Standstill torque	M ₀	Nm			3.9	4.7	7.5	7.5	7.5	7.5		
Rated torque	M _N	Nm			3.4	4.2	4.5	4.5	4.5	4.5		
Max. standstill torque	M _{0,max}	Nm			7.3	8.9	13.1	16.3	20.3	20.8		
Max. torque	M _{max}	Nm			7.3	8.9	13.1	16.3	20.3	20.8		
MCS09L51-												
Standstill torque	M ₀	Nm						4.2	7.5	7.5	7.5	7.5
Rated torque	M _N	Nm						3.6	3.6	3.6	3.6	3.6
Max. standstill torque	M _{0,max}	Nm						8.3	10.8	19.1	19.1	19.1
Max. torque	M _{max}	Nm						8.3	10.8	19.1	19.1	19.1



MCS12, self-ventilated

Motor			Inverter									
			E84AVTC□									
			7514	1124	1524	2224	3024	4024	5524	7524	1134	1534
MCS12D20-												
Standstill torque	M ₀	Nm	5.7	6.4	6.4	6.4	6.4					
Rated torque	M _N	Nm	5.1	5.5	5.5	5.5	5.5					
Max. standstill torque	M _{0,max}	Nm	9.6	12.6	15.3	17.7	17.7					
Max. torque	M _{max}	Nm	9.6	12.6	15.3	17.7	17.7					
MCS12D41-												
Standstill torque	M ₀	Nm		3.8	4.6	6.4	6.4	6.4	6.4			
Rated torque	M _N	Nm		3.0	3.7	4.3	4.3	4.3	4.3			
Max. standstill torque	M _{0,max}	Nm		6.4	7.8	11.4	14.0	16.9	17.3			
Max. torque	M _{max}	Nm		6.4	7.8	11.4	14.0	16.9	17.3			
MCS12H15-												
Standstill torque	M ₀	Nm		9.2	10.9	11.4	11.4	11.4	11.4			
Rated torque	M _N	Nm		8.4	10.0	10.0	10.0	10.0	10.0			
Max. standstill torque	M _{0,max}	Nm		16.4	20.0	29.0	29.0	28.3	29.0			
Max. torque	M _{max}	Nm		16.4	20.0	29.0	29.0	28.3	29.0			
MCS12H35-												
Standstill torque	M ₀	Nm				9.8	9.8	11.4	11.4			
Rated torque	M _N	Nm				7.5	7.5	7.5	7.5			
Max. standstill torque	M _{0,max}	Nm				15.2	18.8	23.5	24.1			
Max. torque	M _{max}	Nm				15.2	18.8	23.5	24.1			
MCS12L20-												
Standstill torque	M ₀	Nm				15.0	15.0	15.0	15.0			
Rated torque	M _N	Nm				13.5	13.5	13.5	13.5			
Max. standstill torque	M _{0,max}	Nm				27.4	33.9	40.8	41.9			
Max. torque	M _{max}	Nm				27.4	33.9	40.8	41.9			
MCS12L41-												
Standstill torque	M ₀	Nm						14.0	15.0	15.0	15.0	15.0
Rated torque	M _N	Nm						10.2	11.0	11.0	11.0	11.0
Max. standstill torque	M _{0,max}	Nm						22.2	30.4	35.5	35.5	35.5
Max. torque	M _{max}	Nm						22.2	30.4	49.6	49.6	49.6



MCS12, forced ventilated

Motor			Inverter								
			E84AVTC□								
			1124	1524	2224	3024	4024	5524	7524	1134	1534
MCS12D17-											
Standstill torque	M ₀	Nm	7.5	7.5	7.5	7.5					
Rated torque	M _N	Nm	7.0	7.0	7.0	7.0					
Max. standstill torque	M _{0,max}	Nm	12.6	15.3	17.7	17.7					
Max. torque	M _{max}	Nm	12.6	15.3	17.7	17.7					
MCS12D35-											
Standstill torque	M ₀	Nm		4.6	7.5	7.5	7.5	7.5			
Rated torque	M _N	Nm		3.7	6.0	6.0	6.0	6.0			
Max. standstill torque	M _{0,max}	Nm		7.8	11.4	14.0	16.9	17.3			
Max. torque	M _{max}	Nm		7.8	11.4	14.0	16.9	17.3			
MCS12H14-											
Standstill torque	M ₀	Nm	8.9	10.9	12.8	12.8	12.8	12.8			
Rated torque	M _N	Nm	8.5	10.3	12.0	12.0	12.0	12.0			
Max. standstill torque	M _{0,max}	Nm	16.4	20.0	29.0	29.0	28.3	29.0			
Max. torque	M _{max}	Nm	16.4	20.0	29.0	29.0	28.3	29.0			
MCS12H34-											
Standstill torque	M ₀	Nm				10.2	12.8	12.8			
Rated torque	M _N	Nm				10.0	10.5	10.5			
Max. standstill torque	M _{0,max}	Nm				18.8	23.5	24.1			
Max. torque	M _{max}	Nm				18.8	23.5	24.1			
MCS12L17-											
Standstill torque	M ₀	Nm				18.5	19.0	19.0			
Rated torque	M _N	Nm				17.0	17.0	17.0			
Max. standstill torque	M _{0,max}	Nm				33.9	40.8	41.9			
Max. torque	M _{max}	Nm				33.9	40.8	41.9			
MCS12L39-											
Standstill torque	M ₀	Nm					17.2	17.2	19.0	19.0	19.0
Rated torque	M _N	Nm					14.0	14.0	14.0	14.0	14.0
Max. standstill torque	M _{0,max}	Nm					22.2	30.4	35.5	35.5	35.5
Max. torque	M _{max}	Nm					22.2	30.4	49.6	49.6	49.6



MCS14, self-ventilated

Motor			Inverter										
			E84AVTC□										
			1124	1524	2224	3024	4024	5524	7524	1134	1534	1834	2234
MCS14D15-													
Standstill torque	M ₀	Nm	7.0	8.5	11.0	11.0	11.0	11.0					
Rated torque	M _N	Nm	6.6	8.0	9.2	9.2	9.2	9.2					
Max. standstill torque	M _{0,max}	Nm	13.1	16.0	22.7	28.1	28.3	29.0					
Max. torque	M _{max}	Nm	13.1	16.0	22.7	28.1	28.3	29.0					
MCS14D36-													
Standstill torque	M ₀	Nm				8.0	11.0	11.0	11.0	11.0			
Rated torque	M _N	Nm				7.3	7.5	7.5	7.5	7.5			
Max. standstill torque	M _{0,max}	Nm				15.2	18.5	25.3	29.0	29.0			
Max. torque	M _{max}	Nm				15.2	18.5	22.2	22.2	22.2			
MCS14H15-													
Standstill torque	M ₀	Nm				17.3	21.0	21.0					
Rated torque	M _N	Nm				16.0	16.0	16.0					
Max. standstill torque	M _{0,max}	Nm				35.3	42.8	43.9					
Max. torque	M _{max}	Nm				35.3	42.8	43.9					
MCS14H32-													
Standstill torque	M ₀	Nm					12.9	16.2	21.0	21.0	21.0		
Rated torque	M _N	Nm					11.2	14.0	14.0	14.0	14.0		
Max. standstill torque	M _{0,max}	Nm					23.2	31.7	37.1	37.1	37.1		
Max. torque	M _{max}	Nm					23.2	31.7	51.9	51.9	51.9		
MCS14L15-													
Standstill torque	M ₀	Nm					27.4	28.0	28.0	28.0			
Rated torque	M _N	Nm					22.5	23.0	23.0	23.0			
Max. standstill torque	M _{0,max}	Nm					43.8	52.9	52.9	52.9			
Max. torque	M _{max}	Nm					43.8	60.0	73.8	73.8			
MCS14L32-													
Standstill torque	M ₀	Nm						15.2	27.4	27.4	28.0	28.0	28.0
Rated torque	M _N	Nm						14.9	17.2	17.2	17.2	17.2	17.2
Max. standstill torque	M _{0,max}	Nm						31.3	39.7	52.9	52.9	52.9	52.9
Max. torque	M _{max}	Nm						31.3	57.6	73.9	73.9	73.9	73.9
MCS14P14-													
Standstill torque	M ₀	Nm					32.5	37.0	37.0	37.0	37.0		
Rated torque	M _N	Nm					26.4	30.0	30.0	30.0	30.0		
Max. standstill torque	M _{0,max}	Nm					51.2	70.0	80.0	80.0	80.0		
Max. torque	M _{max}	Nm					51.2	70.0	105.1	105.1	105.1		
MCS14P32-													
Standstill torque	M ₀	Nm						19.8	35.8	35.8	37.0	37.0	37.0
Rated torque	M _N	Nm						17.5	21.0	21.0	21.0	21.0	21.0
Max. standstill torque	M _{0,max}	Nm						36.5	46.3	61.8	61.8	61.8	61.8
Max. torque	M _{max}	Nm						36.5	67.3	86.4	86.4	86.4	86.4



MCS14, forced ventilated

Motor			Inverter									
			E84AVTC□									
			1524	2224	3024	4024	5524	7524	1134	1534	1834	2234
MCS14D14-												
Standstill torque	M ₀	Nm	8.5	12.5	12.5	12.5	12.5					
Rated torque	M _N	Nm	8.0	12.0	12.0	12.0	12.0					
Max. standstill torque	M _{0,max}	Nm	16.0	22.7	28.1	28.3	29.0					
Max. torque	M _{max}	Nm	16.0	22.7	28.1	28.3	29.0					
MCS14D30-												
Standstill torque	M ₀	Nm			7.7	12.2	12.5	12.5	12.5			
Rated torque	M _N	Nm			7.0	9.8	10.0	10.0	10.0			
Max. standstill torque	M _{0,max}	Nm			15.2	18.5	25.3	29.0	29.0			
Max. torque	M _{max}	Nm			15.2	18.5	22.2	22.2	22.2			
MCS14H12-												
Standstill torque	M ₀	Nm			18.0	25.5	25.5					
Rated torque	M _N	Nm			17.9	23.5	23.5					
Max. standstill torque	M _{0,max}	Nm			35.3	42.8	43.9					
Max. torque	M _{max}	Nm			35.3	42.8	43.9					
MCS14H28-												
Standstill torque	M ₀	Nm					16.2	25.5	25.5	25.5		
Rated torque	M _N	Nm					16.1	20.5	20.5	20.5		
Max. standstill torque	M _{0,max}	Nm					31.7	37.1	37.1	37.1		
Max. torque	M _{max}	Nm					31.7	51.9	51.9	51.9		
MCS14L14-												
Standstill torque	M ₀	Nm				26.9	33.4	34.5	34.5			
Rated torque	M _N	Nm				24.6	30.5	30.5	30.5			
Max. standstill torque	M _{0,max}	Nm				43.8	52.9	52.9	52.9			
Max. torque	M _{max}	Nm				43.8	60.0	73.8	73.8			
MCS14L30-												
Standstill torque	M ₀	Nm							27.4	34.5	34.5	34.5
Rated torque	M _N	Nm							25.5	25.5	25.5	25.5
Max. standstill torque	M _{0,max}	Nm							52.9	52.9	52.9	52.9
Max. torque	M _{max}	Nm							73.9	73.9	73.9	73.9
MCS14P11-												
Standstill torque	M ₀	Nm					38.9	43.5	43.5	43.5		
Rated torque	M _N	Nm					38.8	42.0	42.0	42.0		
Max. standstill torque	M _{0,max}	Nm					70.0	80.0	80.0	80.0		
Max. torque	M _{max}	Nm					70.0	105.1	105.1	105.1		
MCS14P23-												
Standstill torque	M ₀	Nm							35.8	43.5	43.5	43.5
Rated torque	M _N	Nm							33.0	33.0	33.0	33.0
Max. standstill torque	M _{0,max}	Nm							66.0	86.4	86.4	86.4
Max. torque	M _{max}	Nm							86.4	86.4	86.4	86.4



MCS19, self-ventilated

Motor			Inverter								
			E84AVTC□								
			3024	4024	5524	7524	1134	1534	1834	2234	3034
MCS19F14-											
Standstill torque	M ₀	Nm	23.6	32.0	32.0	32.0	32.0				
Rated torque	M _N	Nm	22.9	27.0	27.0	27.0	27.0				
Max. standstill torque	M _{0,max}	Nm	45.9	56.7	68.3	68.3	68.3				
Max. torque	M _{max}	Nm	45.9	56.7	77.6	86.0	86.0				
MCS19F30-											
Standstill torque	M ₀	Nm			21.0	32.0	32.0	32.0			
Rated torque	M _N	Nm			19.5	21.0	21.0	21.0			
Max. standstill torque	M _{0,max}	Nm			47.2	47.2	47.2	47.2			
Max. torque	M _{max}	Nm			38.9	68.3	68.3	68.3			
MCS19J14-											
Standstill torque	M ₀	Nm			43.6	51.0	51.0	51.0			
Rated torque	M _N	Nm			40.0	40.0	40.0	40.0			
Max. standstill torque	M _{0,max}	Nm			81.1	96.0	96.0	96.0			
Max. torque	M _{max}	Nm			81.1	129.0	129.0	129.0			
MCS19J30-											
Standstill torque	M ₀	Nm					39.3	51.0	51.0	51.0	51.0
Rated torque	M _N	Nm					29.0	29.0	29.0	29.0	29.0
Max. standstill torque	M _{0,max}	Nm					73.6	79.5	79.5	79.5	79.5
Max. torque	M _{max}	Nm					110.4	127.6	127.6	127.6	127.6
MCS19P14-											
Standstill torque	M ₀	Nm			47.5	64.0	64.0	64.0			
Rated torque	M _N	Nm			46.4	51.0	51.0	51.0			
Max. standstill torque	M _{0,max}	Nm			92.7	106.7	106.7	106.7			
Max. torque	M _{max}	Nm			92.7	155.5	155.5	155.5			
MCS19P30-											
Standstill torque	M ₀	Nm					43.1	58.7	64.0	64.0	64.0
Rated torque	M _N	Nm					32.0	32.0	32.0	32.0	32.0
Max. standstill torque	M _{0,max}	Nm					79.2	87.6	87.6	87.6	87.6
Max. torque	M _{max}	Nm					118.6	144.3	144.3	144.3	144.3



MCS19, forced ventilated

Motor			Inverter								
			E84AVTC□								
			3024	4024	5524	7524	1134	1534	1834	2234	3034
MCS19F12-											
Standstill torque	M ₀	Nm	23.6	34.9	41.5	41.5	41.5				
Rated torque	M _N	Nm	22.9	31.9	38.0	38.0	38.0				
Max. standstill torque	M _{0,max}	Nm	45.9	56.7	68.3	68.3	68.3				
Max. torque	M _{max}	Nm	45.9	56.7	77.6	86.0	86.0				
MCS19F29-											
Standstill torque	M ₀	Nm					39.9	41.5			
Rated torque	M _N	Nm					32.5	32.5			
Max. standstill torque	M _{0,max}	Nm					47.2	47.2			
Max. torque	M _{max}	Nm					68.3	68.3			
MCS19J12-											
Standstill torque	M ₀	Nm			43.6		70.5	70.5			
Rated torque	M _N	Nm			43.4		62.5	62.5			
Max. standstill torque	M _{0,max}	Nm			81.1		96.0	96.0			
Max. torque	M _{max}	Nm			81.1		129.0	129.0			
MCS19J29-											
Standstill torque	M ₀	Nm						55.5	70.5	70.5	70.5
Rated torque	M _N	Nm						50.5	50.5	50.5	50.5
Max. standstill torque	M _{0,max}	Nm						87.6	87.6	87.6	87.6
Max. torque	M _{max}	Nm						127.6	127.6	127.6	127.6
MCS19P12-											
Standstill torque	M ₀	Nm			47.5		86.0	86.0			
Rated torque	M _N	Nm			46.4		72.0	72.0			
Max. standstill torque	M _{0,max}	Nm			92.7		106.7	106.7			
Max. torque	M _{max}	Nm			92.7		155.5	155.5			
MCS19P29-											
Standstill torque	M ₀	Nm						58.7	86.0	86.0	86.0
Rated torque	M _N	Nm						53.0	53.0	53.0	53.0
Max. standstill torque	M _{0,max}	Nm						87.6	87.6	87.6	87.6
Max. torque	M _{max}	Nm						144.3	144.3	144.3	144.3



Torque characteristics




The torque/speed characteristic for your motor/inverter combination can be found on the Internet:

<http://www.lenze.com> → Product Finder → M-n characteristics




The following data apply to a mains voltage 3 x 400 V of the inverter.

MCS06C41- (self-ventilated)

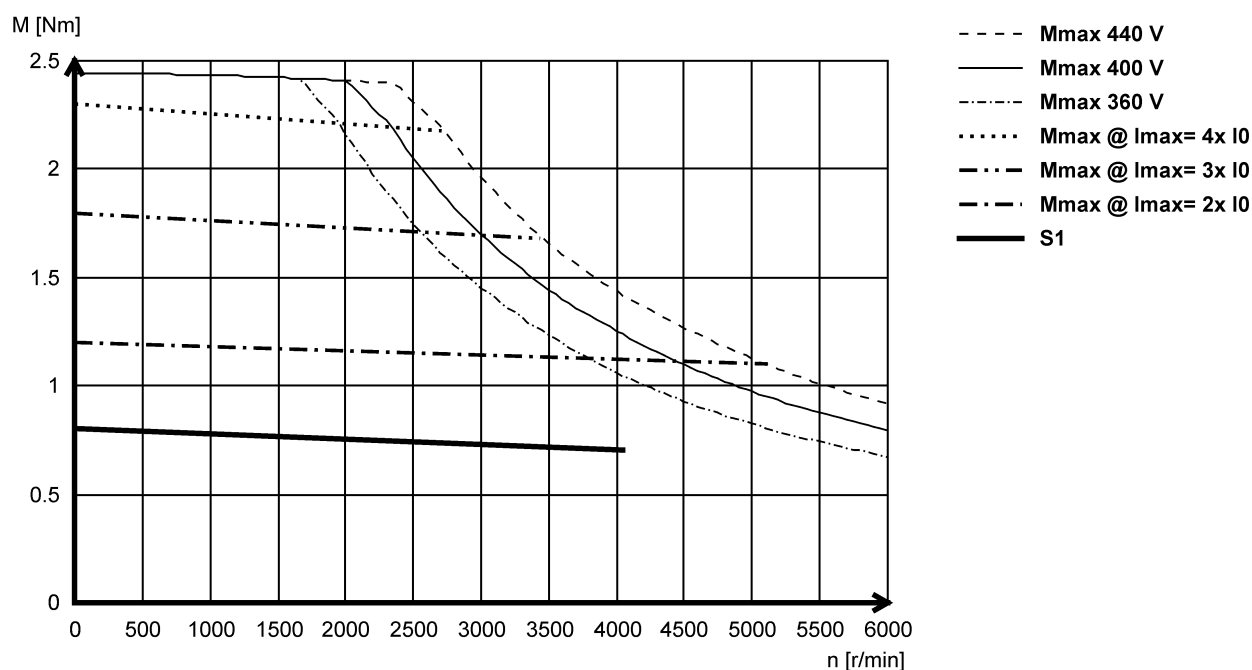


MCS06C60- (self-ventilated)

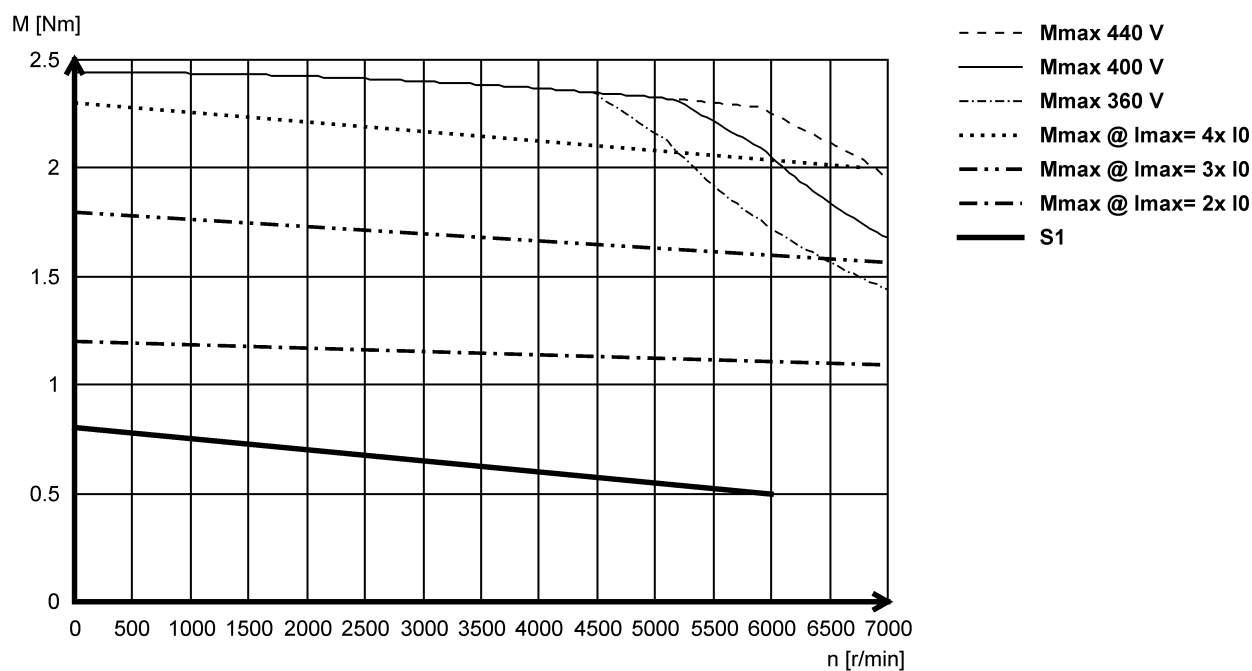




MCS06F41- (self-ventilated)

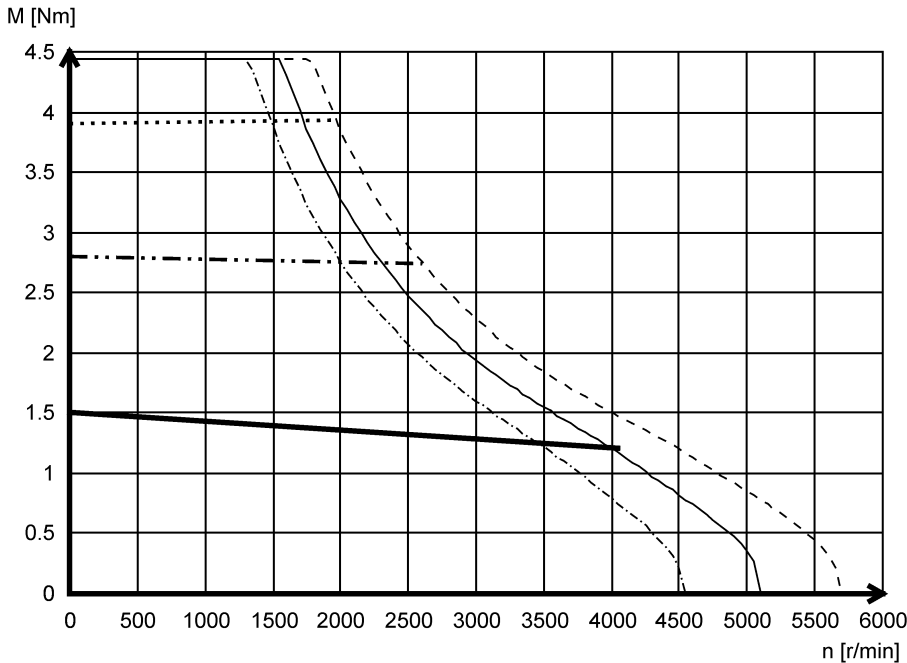

MCS06F60- (self-ventilated)

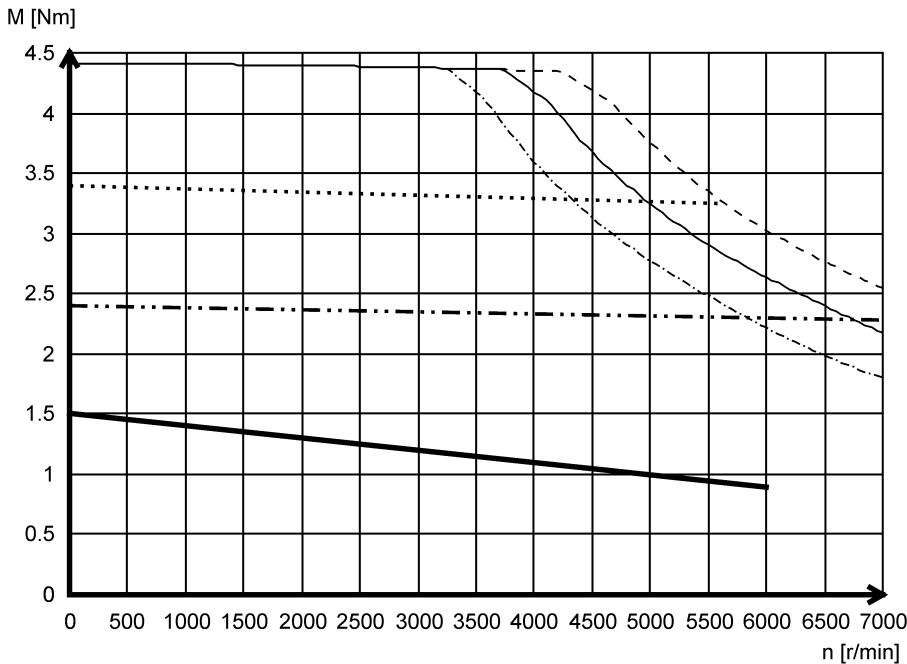




Technical data


Torque characteristics

MCS06I41- (self-ventilated)

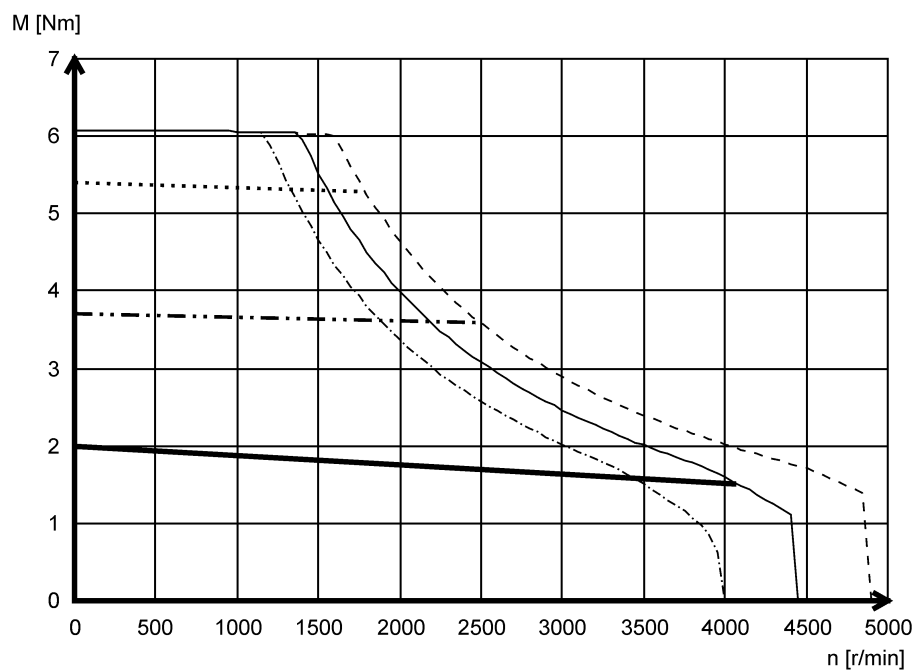

- Mmax 440 V
- Mmax 400 V
- Mmax 360 V
- Mmax @ I_{max}= 3x I₀
- · - · Mmax @ I_{max}= 2x I₀
- S1


MCS06I60- (self-ventilated)

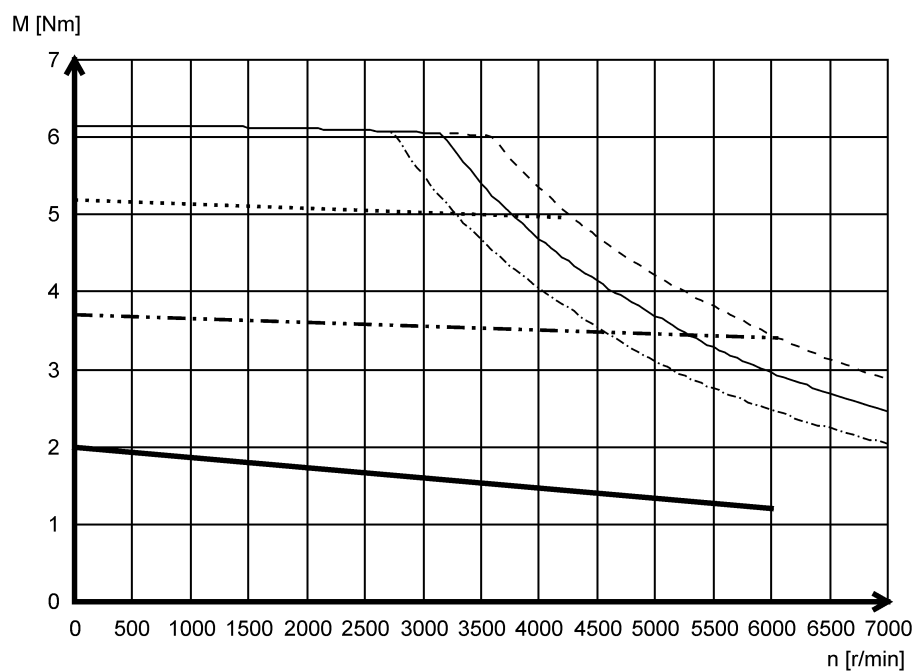


- Mmax 440 V
- Mmax 400 V
- Mmax 360 V
- Mmax @ I_{max}= 3x I₀
- · - · Mmax @ I_{max}= 2x I₀
- S1



MCS09D41- (self-ventilated)

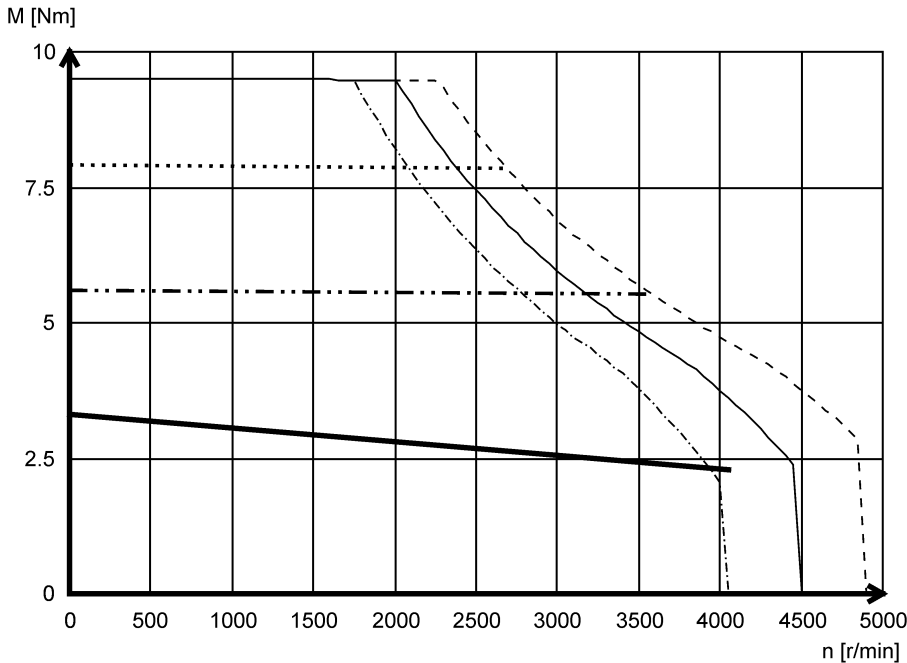

MCS09D60- (self-ventilated)

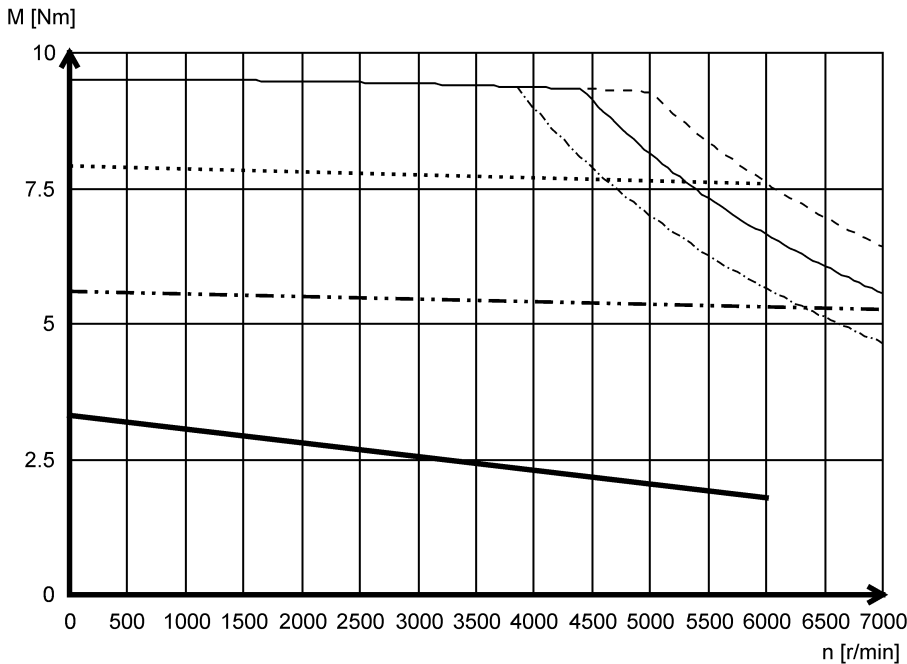




Technical data


Torque characteristics

MCS09F38- (self-ventilated)

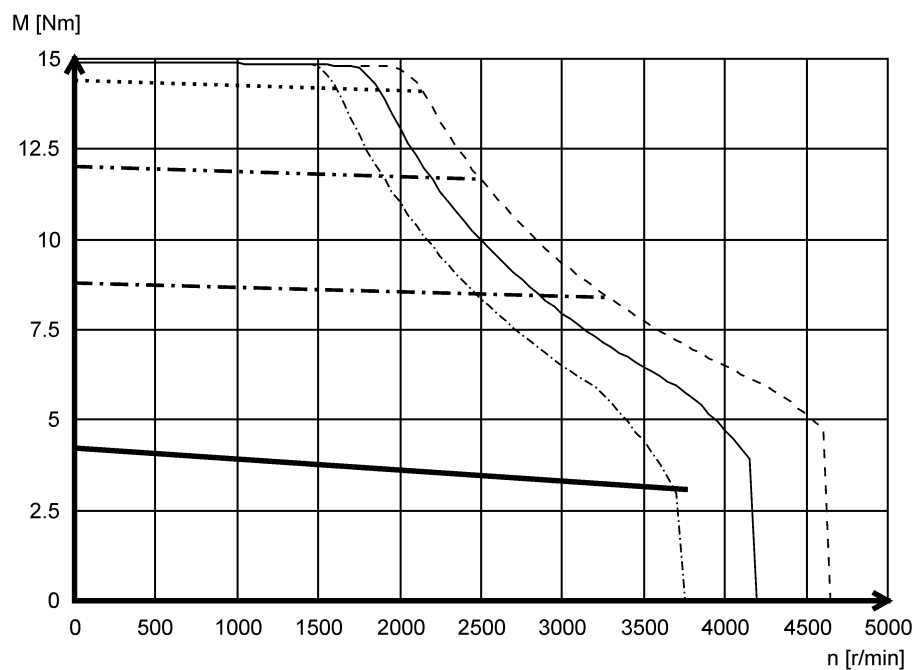

- Mmax 440 V
- Mmax 400 V
- .- Mmax 360 V
- Mmax @ I_{max}= 4x I₀
- .-.- Mmax @ I_{max}= 3x I₀
- .-.- Mmax @ I_{max}= 2x I₀
- S1


MCS09F60- (self-ventilated)

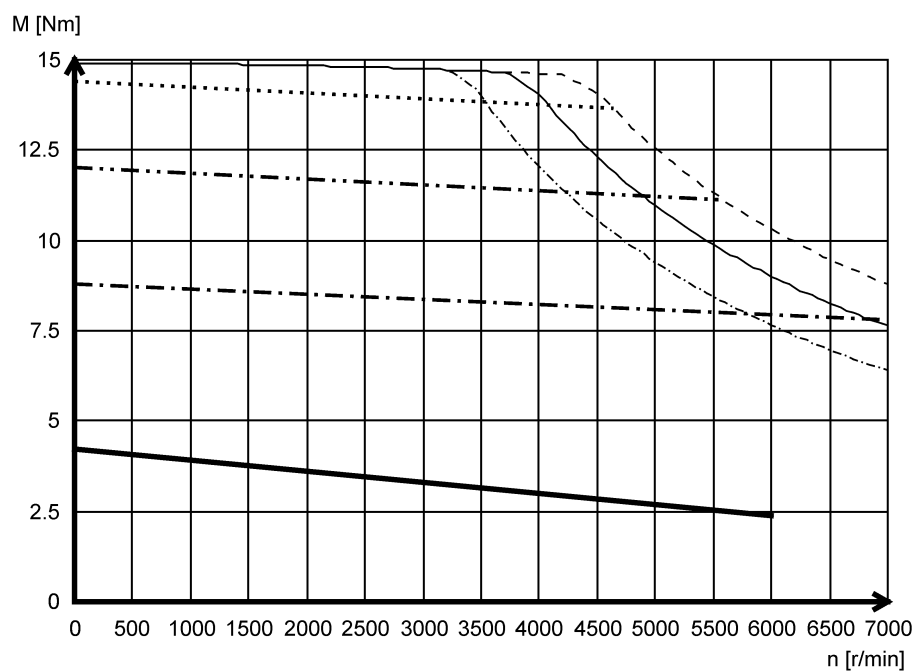

- Mmax 440 V
- Mmax 400 V
- .- Mmax 360 V
- Mmax @ I_{max}= 4x I₀
- .-.- Mmax @ I_{max}= 3x I₀
- .-.- Mmax @ I_{max}= 2x I₀
- S1




MCS09H41- (self-ventilated)

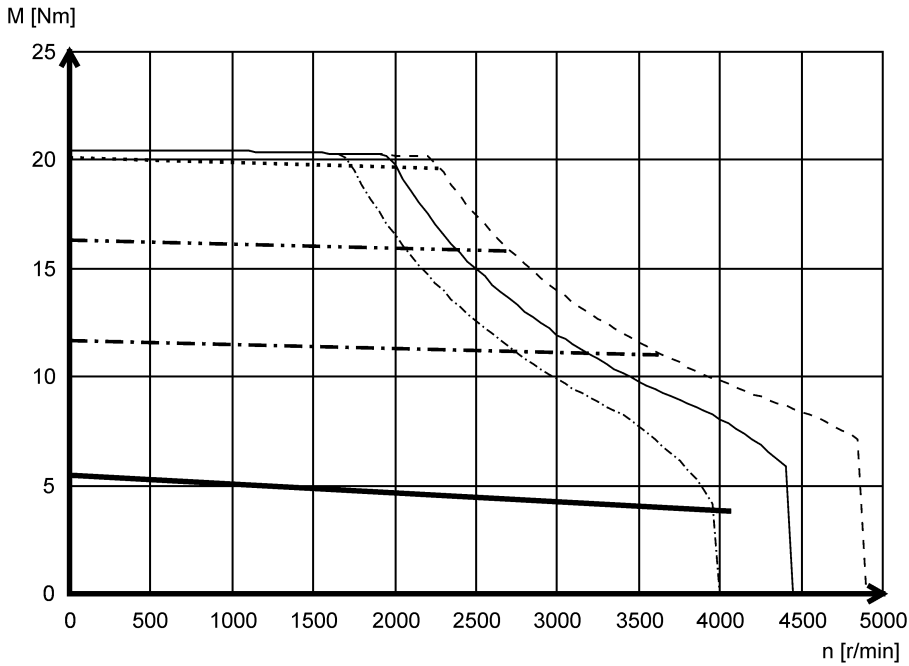

- Mmax 440 V
- Mmax 400 V
- · - Mmax 360 V
- Mmax @ I_{max}= 4x I₀
- - - Mmax @ I_{max}= 3x I₀
- · - Mmax @ I_{max}= 2x I₀
- S1

MCS09H60- (self-ventilated)

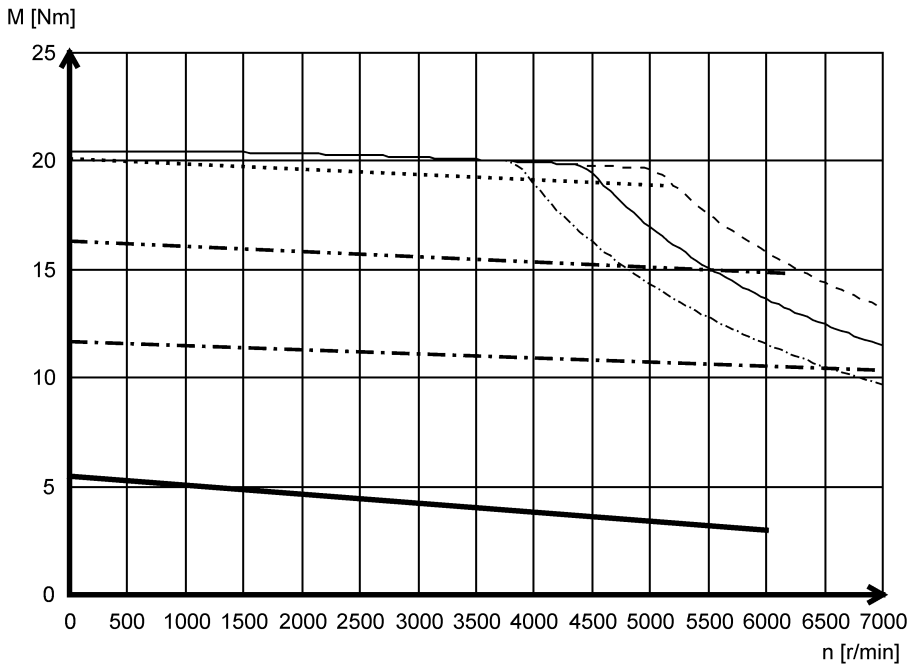


- Mmax 440 V
- Mmax 400 V
- · - Mmax 360 V
- Mmax @ I_{max}= 4x I₀
- - - Mmax @ I_{max}= 3x I₀
- · - Mmax @ I_{max}= 2x I₀
- S1



Technical data


Torque characteristics

MCS09L41- (self-ventilated)

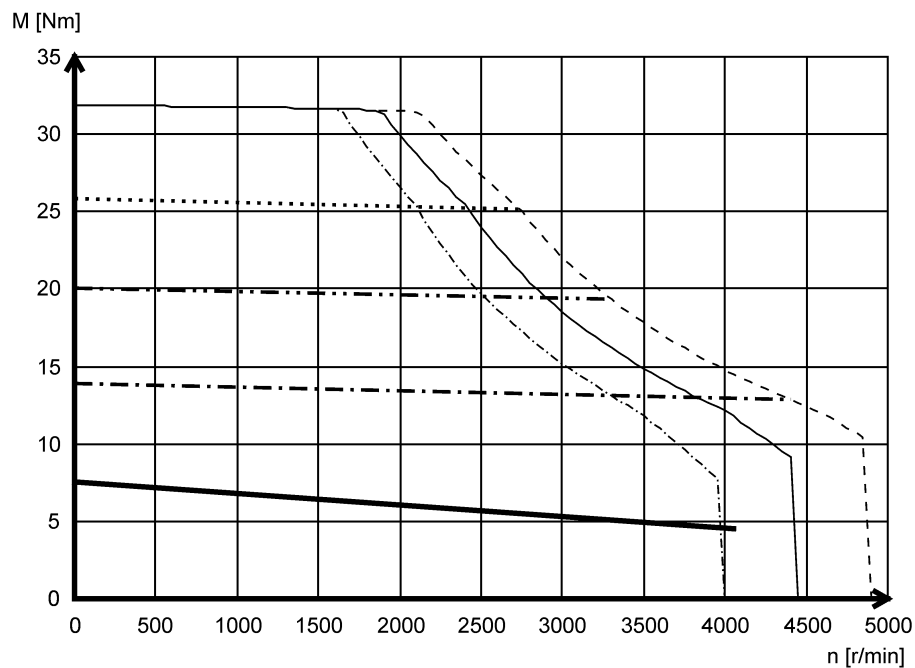

- Mmax 440 V
- Mmax 400 V
- · - · Mmax 360 V
- Mmax @ Imax= 4x I0
- Mmax @ Imax= 3x I0
- · - · Mmax @ Imax= 2x I0
- S1


MCS09L51- (self-ventilated)

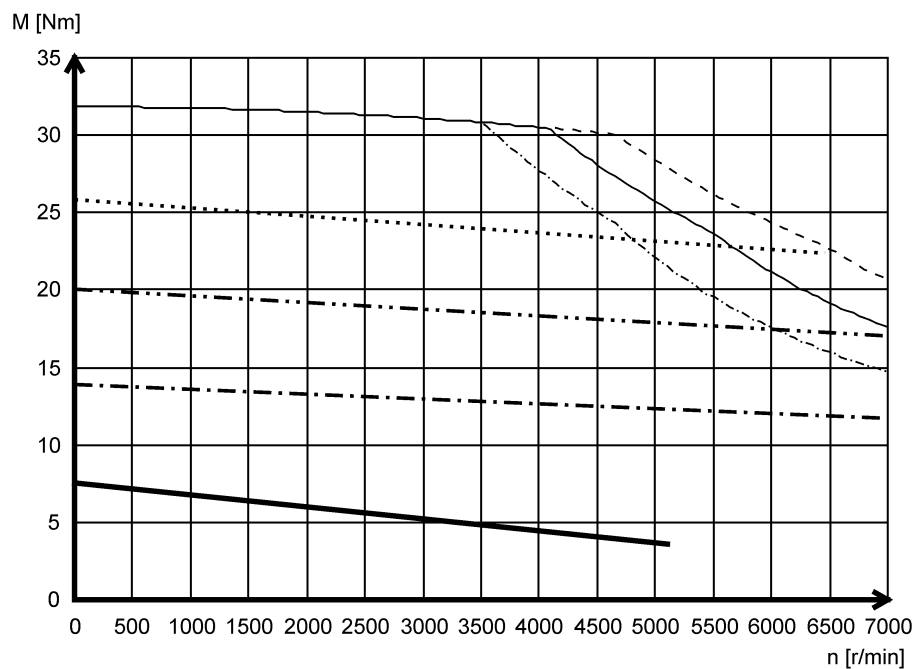

- Mmax 440 V
- Mmax 400 V
- · - · Mmax 360 V
- Mmax @ Imax= 4x I0
- Mmax @ Imax= 3x I0
- · - · Mmax @ Imax= 2x I0
- S1




MCS12D17- (forced ventilated)

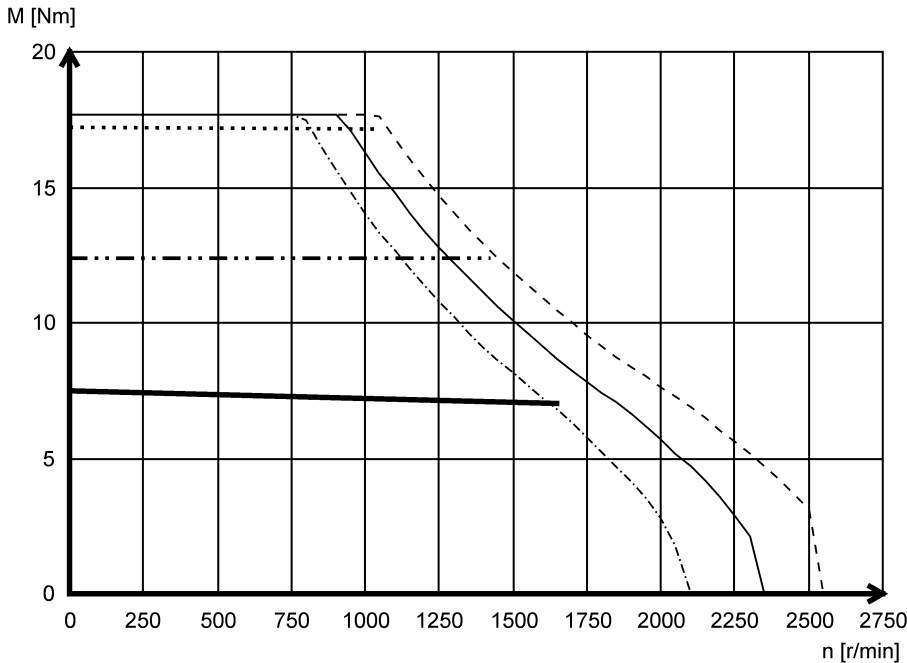

- Mmax 440 V
- Mmax 400 V
- · - Mmax 360 V
- Mmax @ I_{max}= 3x I₀
- - - Mmax @ I_{max}= 2x I₀
- S1

MCS12D20- (self-ventilated)

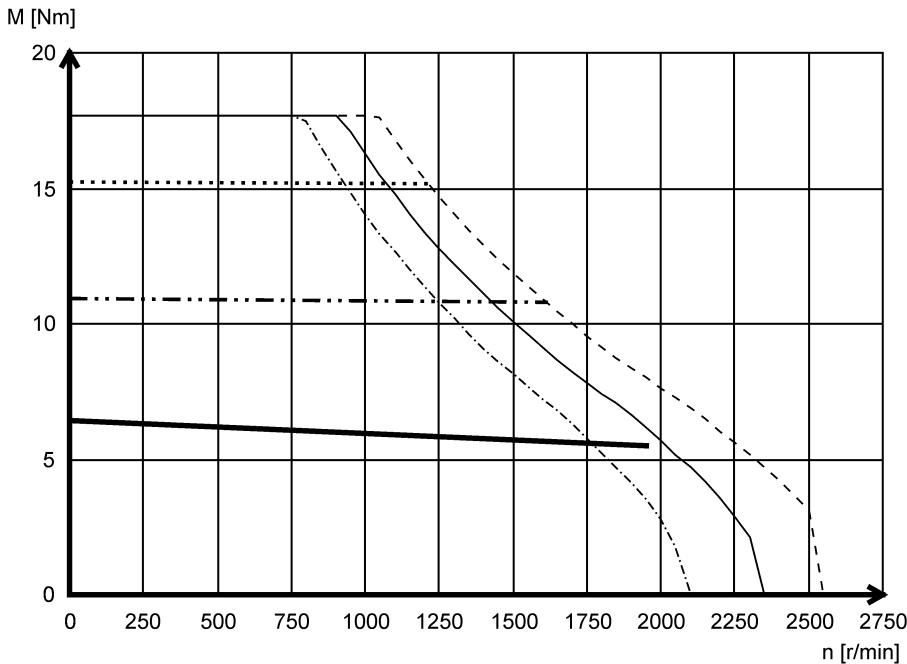


- Mmax 440 V
- Mmax 400 V
- · - Mmax 360 V
- Mmax @ I_{max}= 3x I₀
- - - Mmax @ I_{max}= 2x I₀
- S1



Technical data


Torque characteristics

MCS12D35- (forced ventilated)

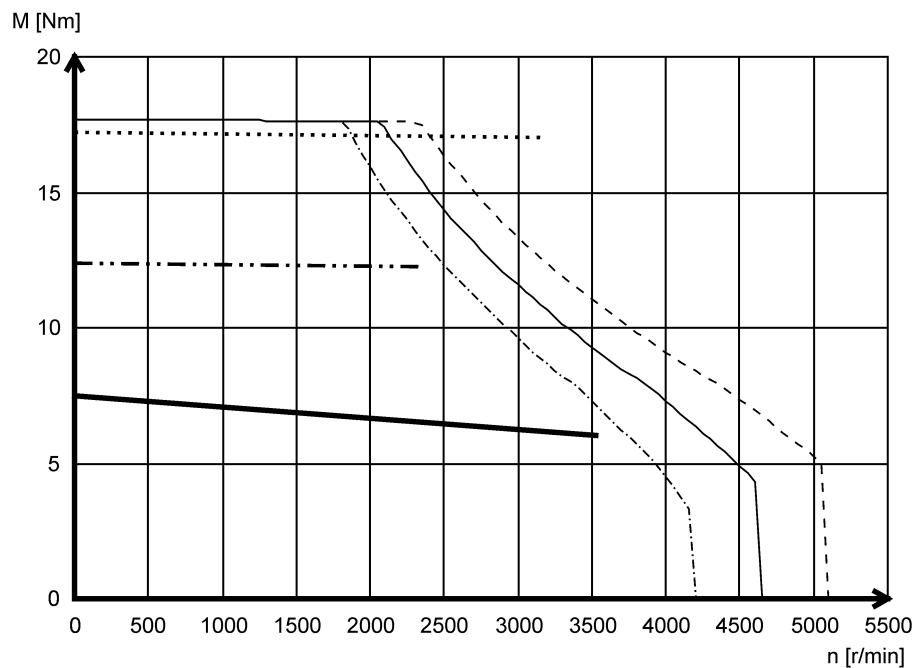

- Mmax 440 V
- Mmax 400 V
- · - · Mmax 360 V
- Mmax @ Imax= 3x I0
- · · - Mmax @ Imax= 2x I0
- S1


MCS12D41- (self-ventilated)

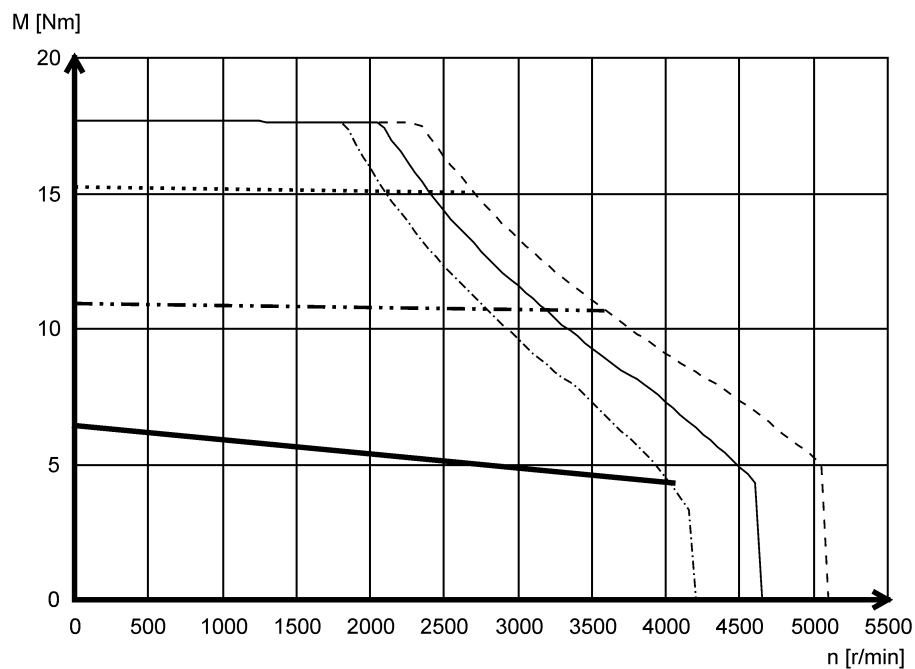


- Mmax 440 V
- Mmax 400 V
- · - · Mmax 360 V
- Mmax @ Imax= 3x I0
- · · - Mmax @ Imax= 2x I0
- S1



MCS12H14- (forced ventilated)

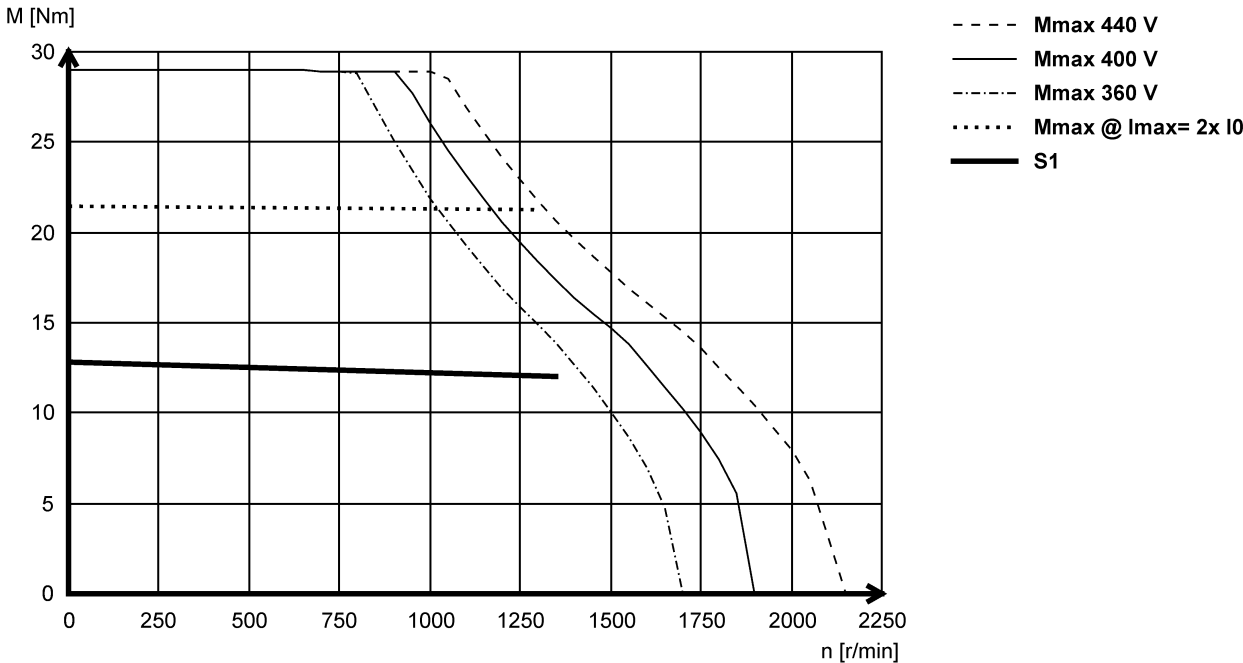


MCS12H15- (self-ventilated)

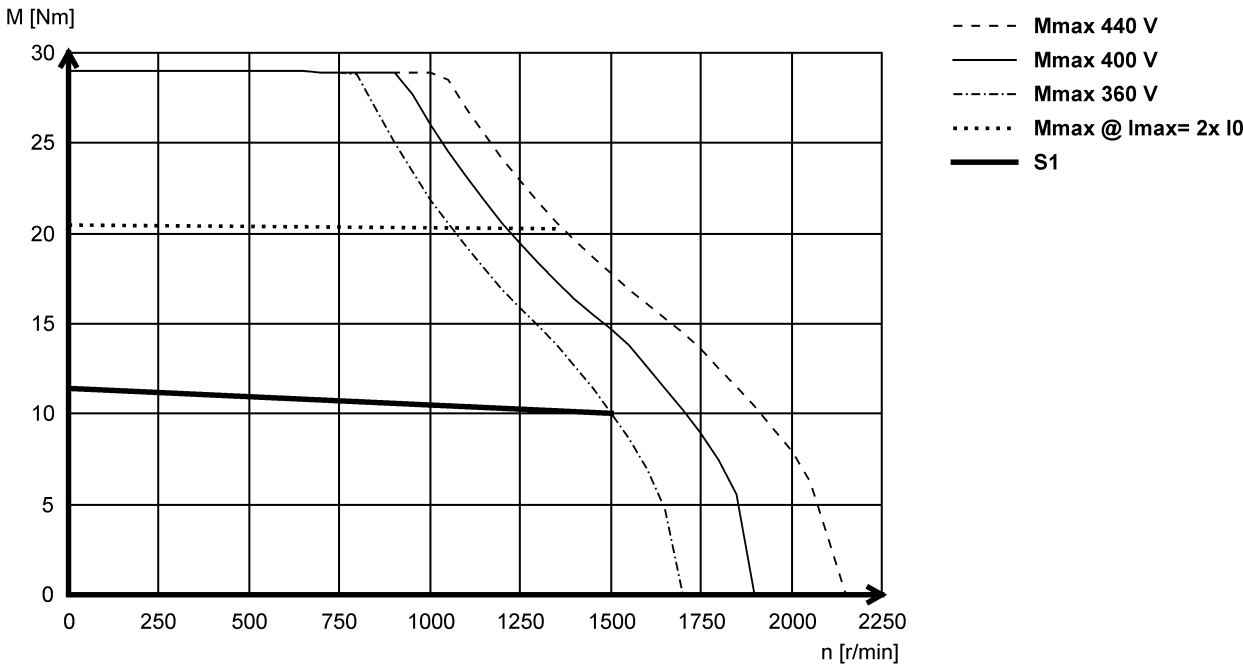




MCS12H34- (forced ventilated)

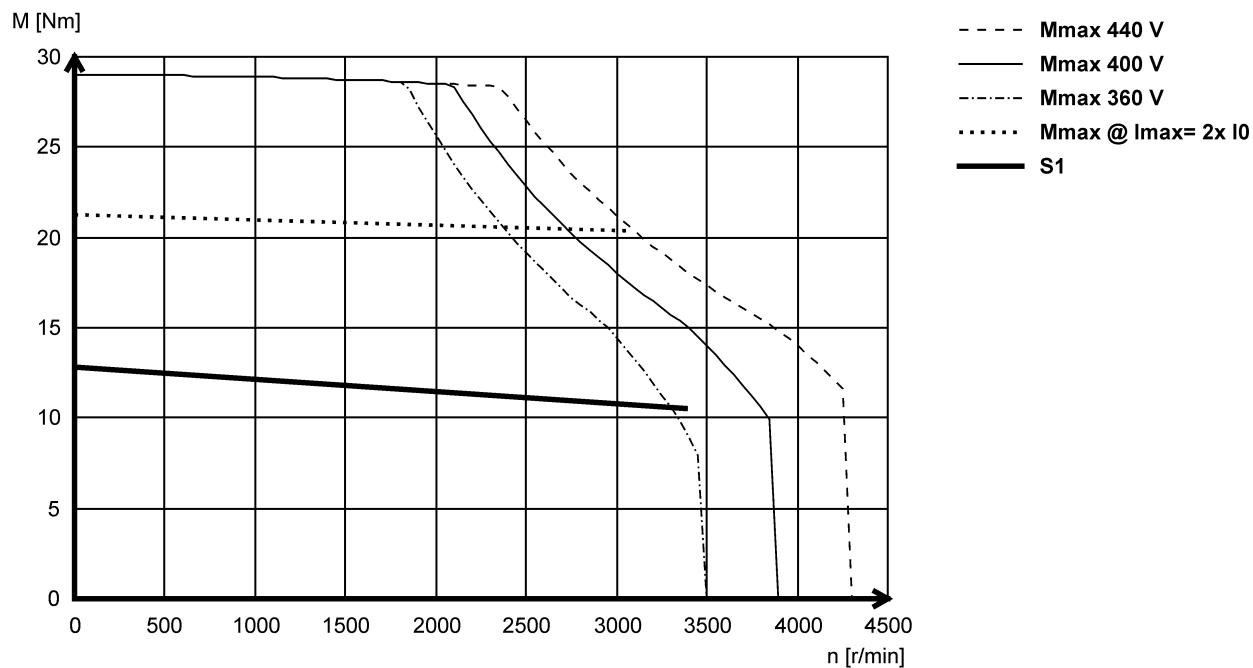


MCS12H35- (self-ventilated)

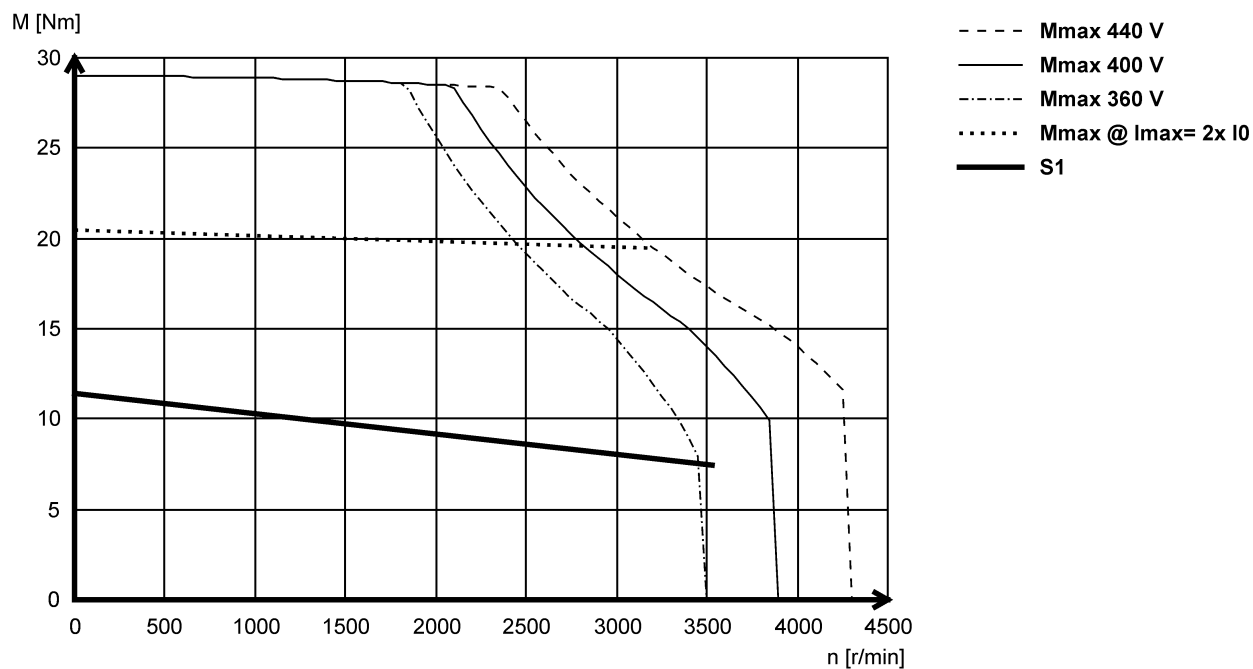




MCS12L17- (forced ventilated)

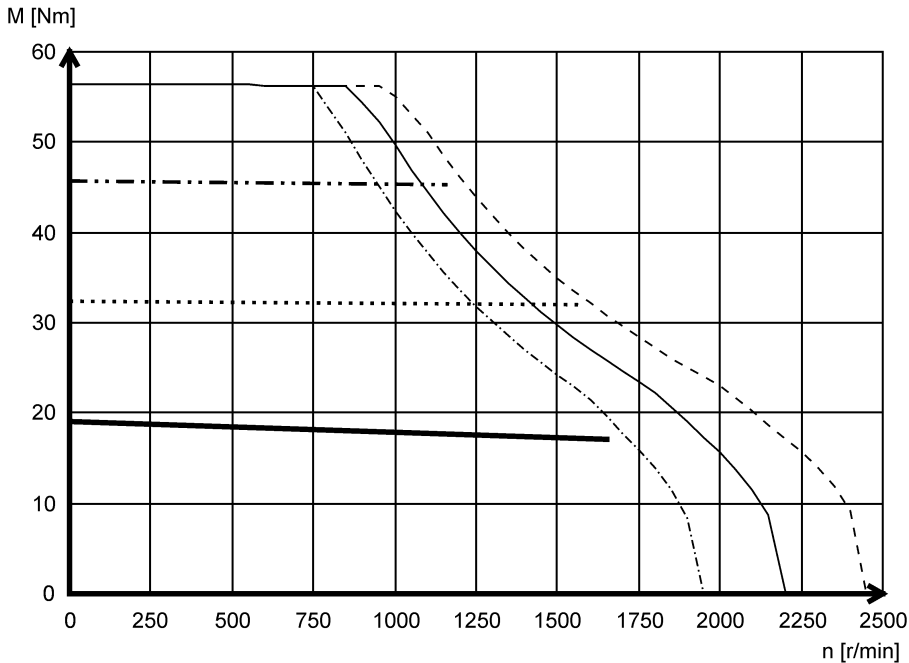

MCS12L20- (self-ventilated)

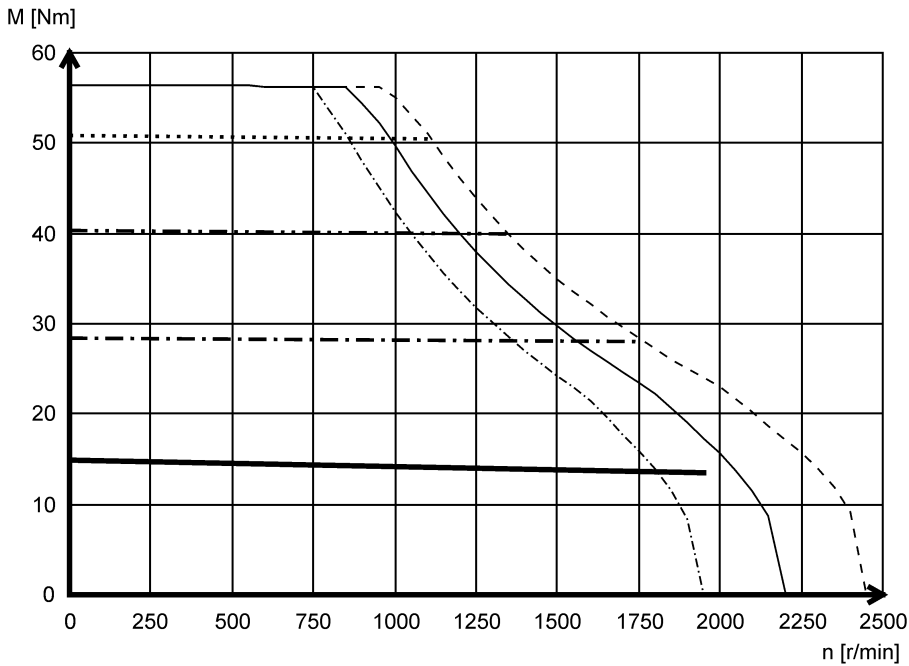




Technical data


Torque characteristics

MCS12L39- (forced ventilated)

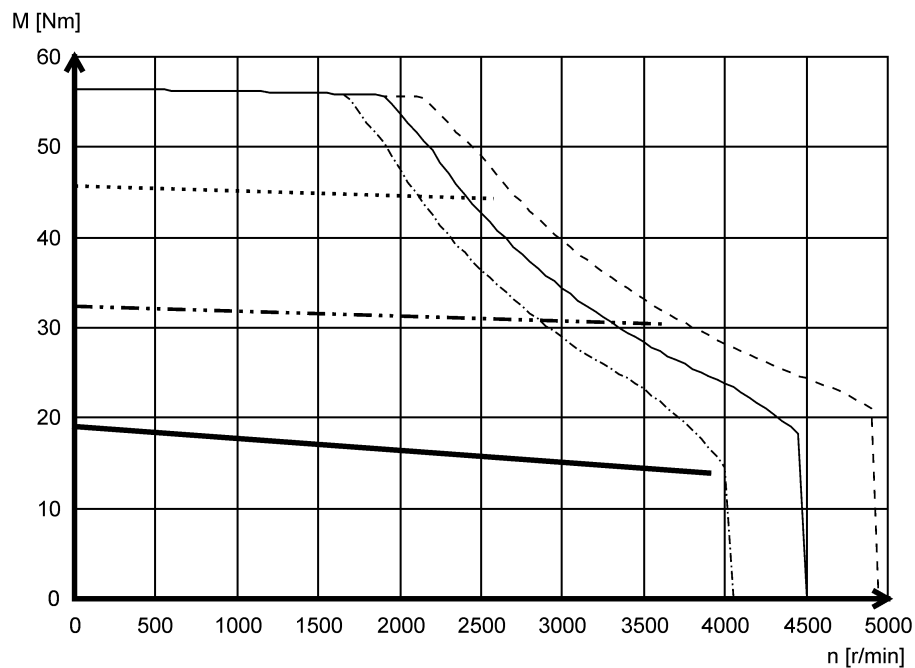

- Mmax 440 V
- Mmax 400 V
- .- Mmax 360 V
- Mmax @ Imax= 3x I0
- .- Mmax @ Imax= 2x I0
- S1


MCS12L41- (self-ventilated)

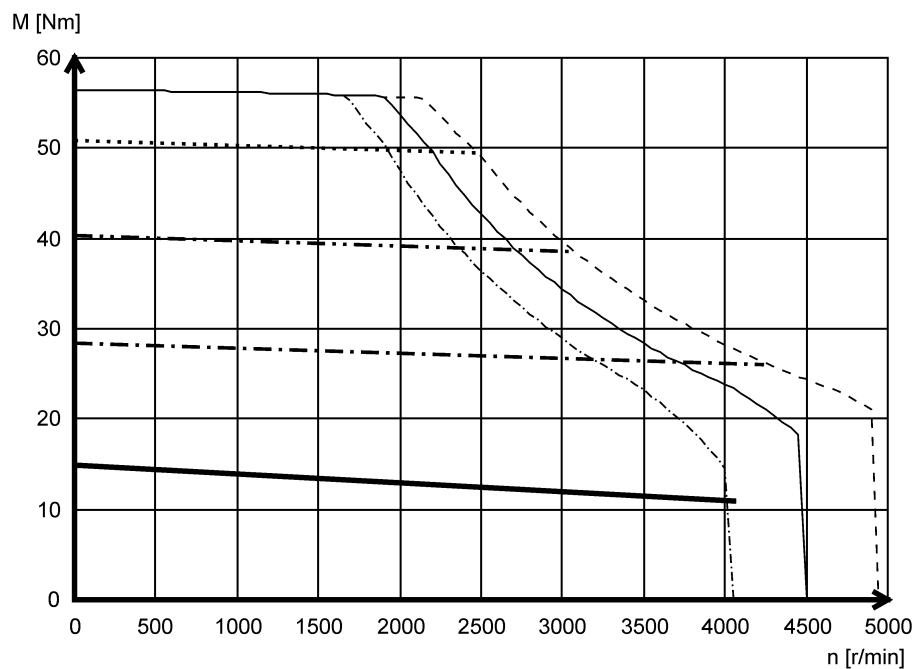


- Mmax 440 V
- Mmax 400 V
- .- Mmax 360 V
- Mmax @ Imax= 4x I0
- .- Mmax @ Imax= 3x I0
- .- Mmax @ Imax= 2x I0
- S1



MCS14D14- (forced ventilated)

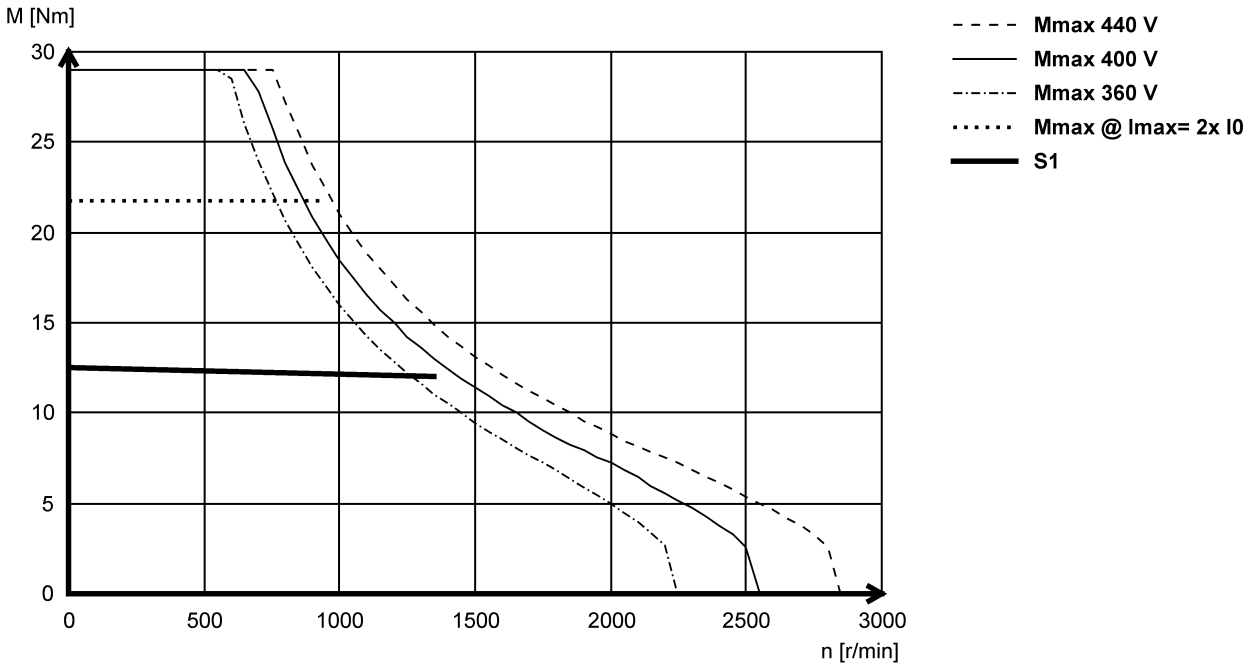

MCS14D15- (self-ventilated)

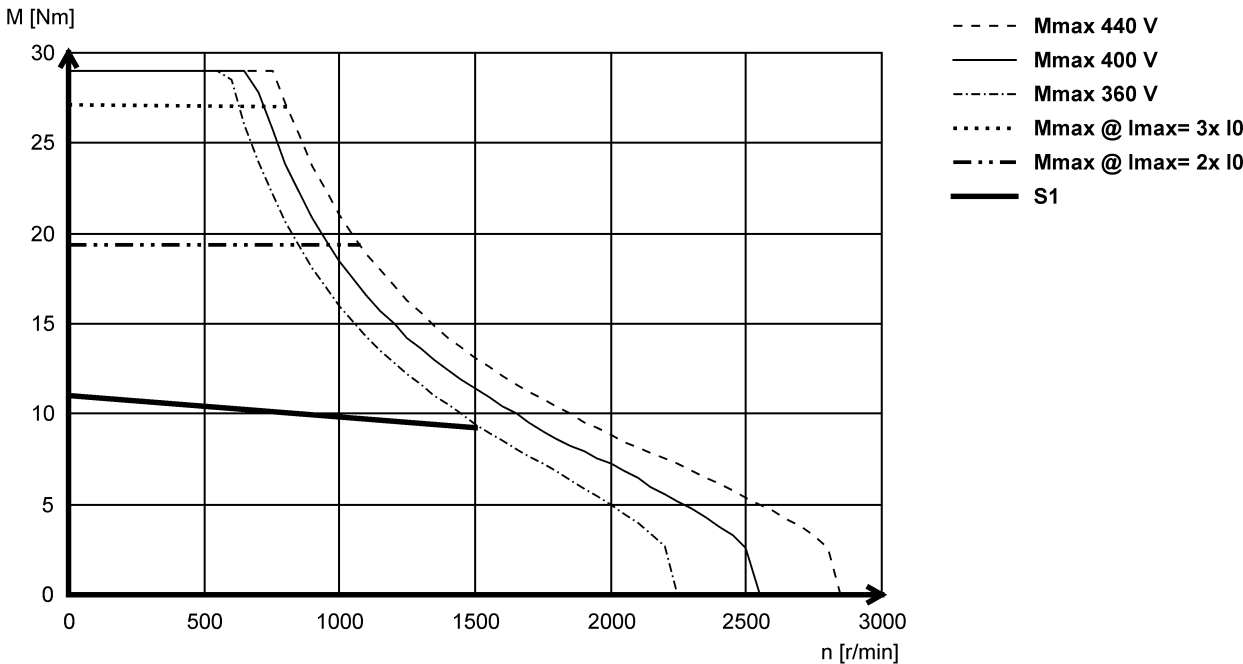





Technical data

Torque characteristics

MCS14D30- (forced ventilated)

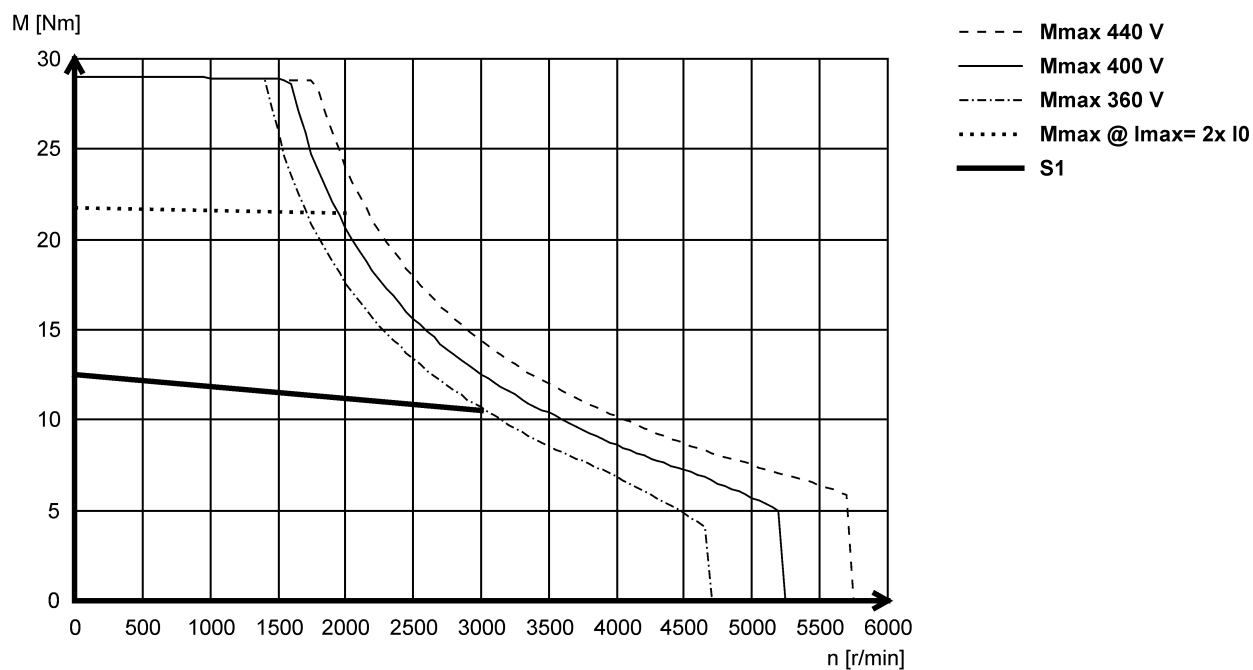


MCS14D36- (self-ventilated)

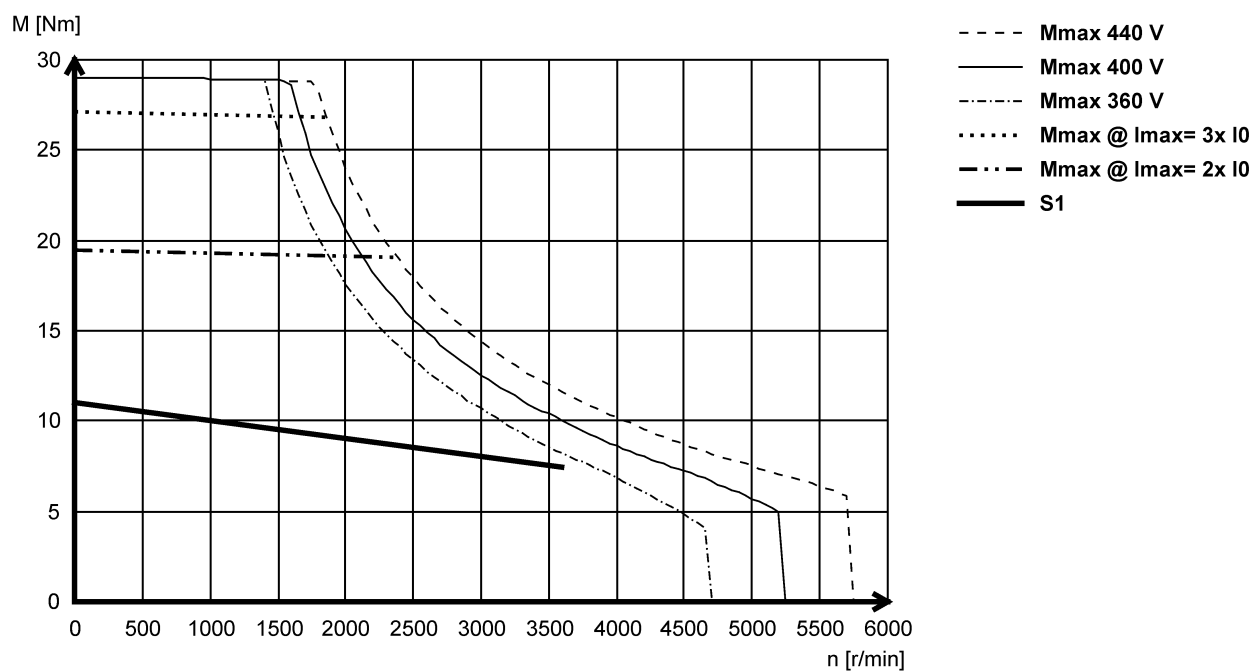




MCS14H12- (forced ventilated)

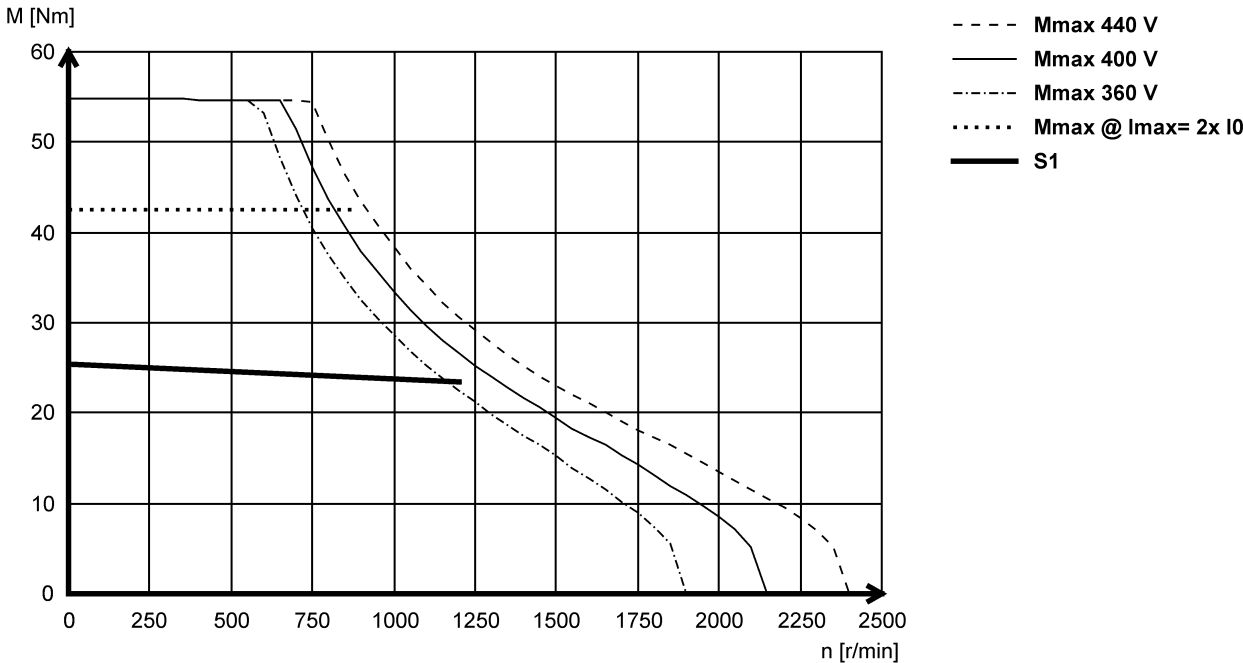

MCS14H15- (self-ventilated)

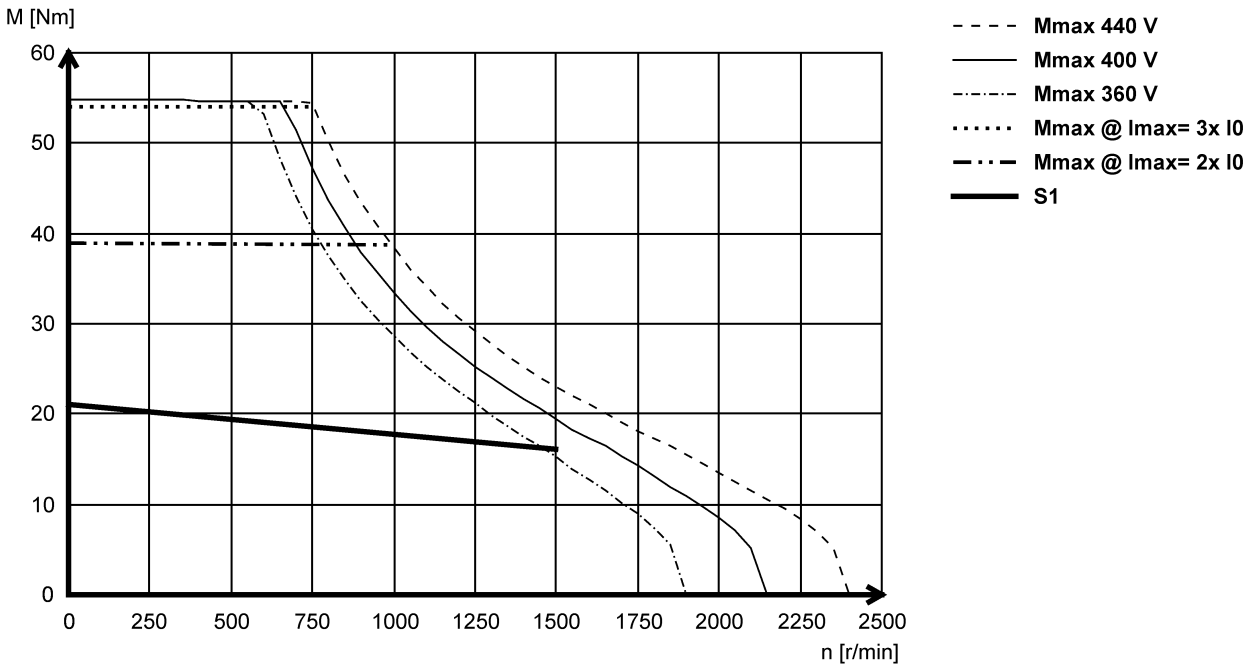





Technical data

Torque characteristics

MCS14H28- (forced ventilated)

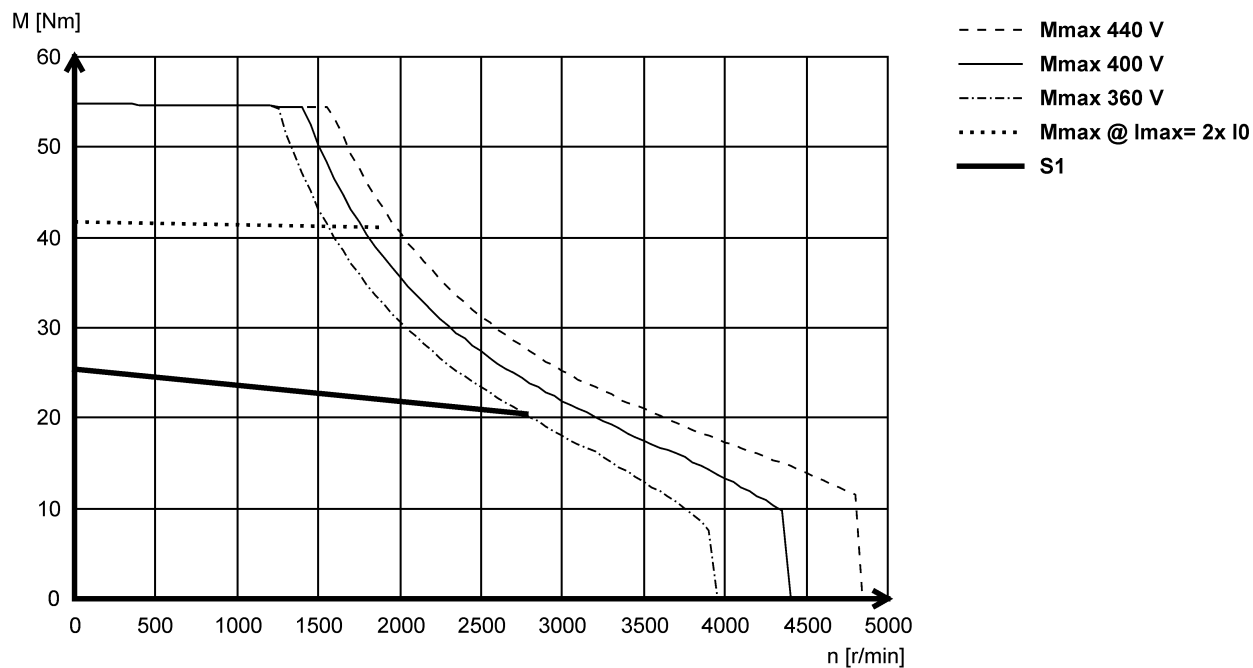


MCS14H32- (self-ventilated)

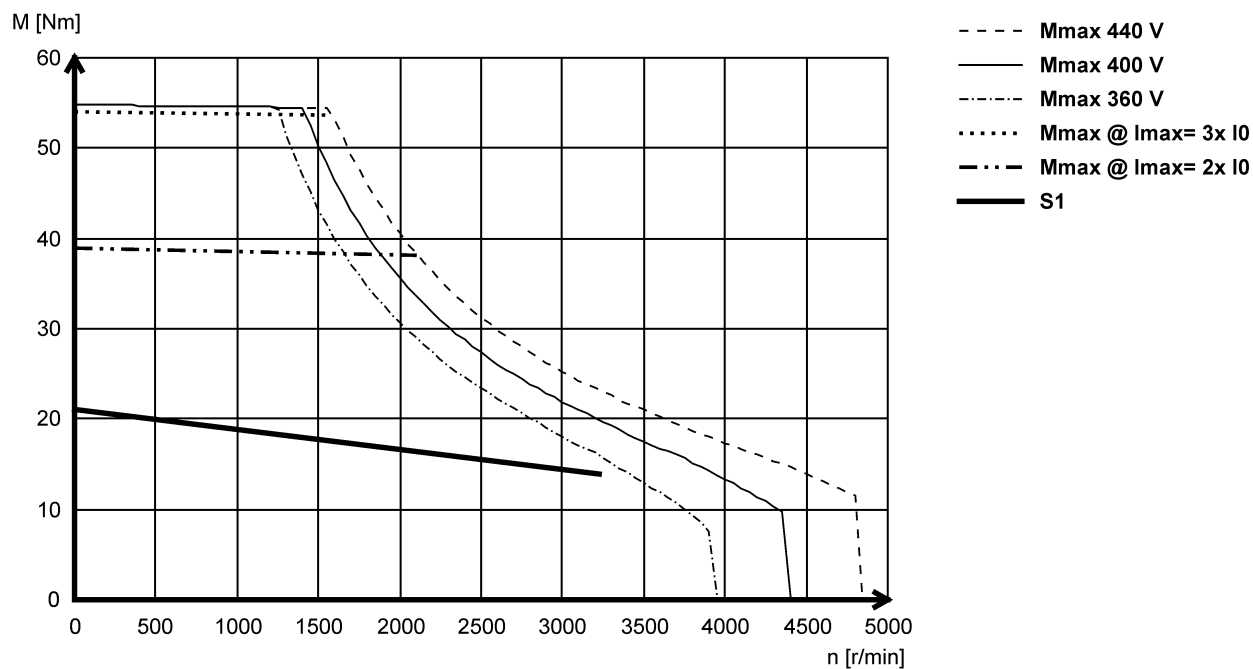




MCS14L14- (forced ventilated)

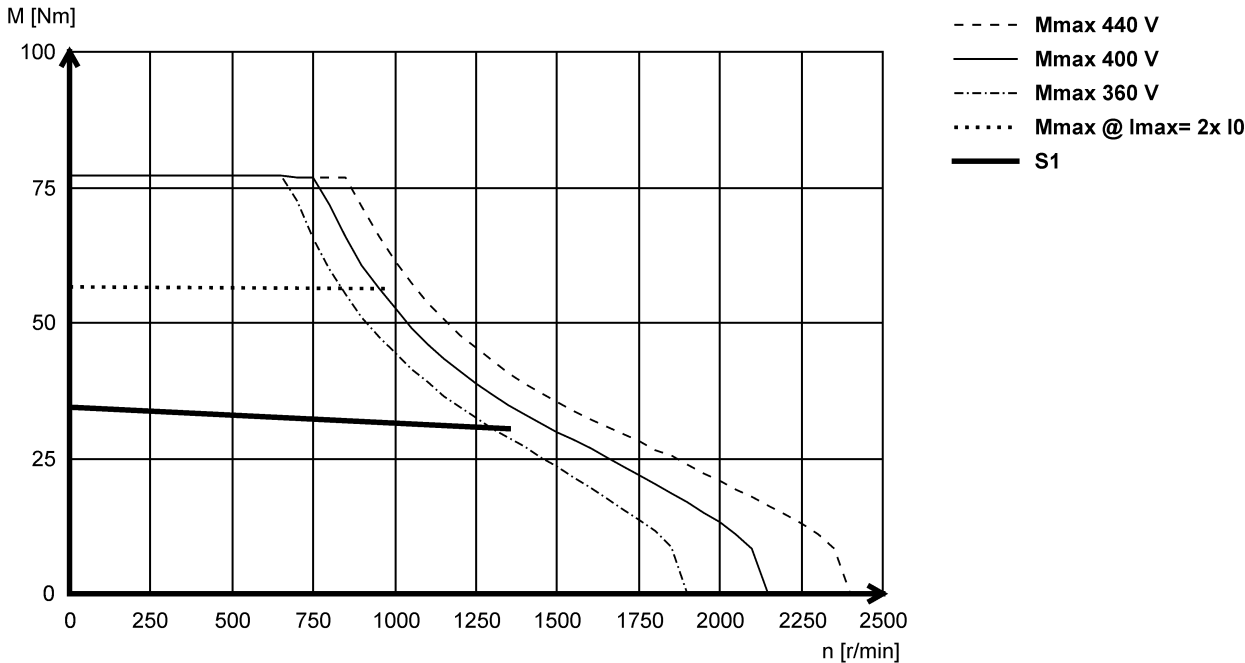

MCS14L15- (self-ventilated)

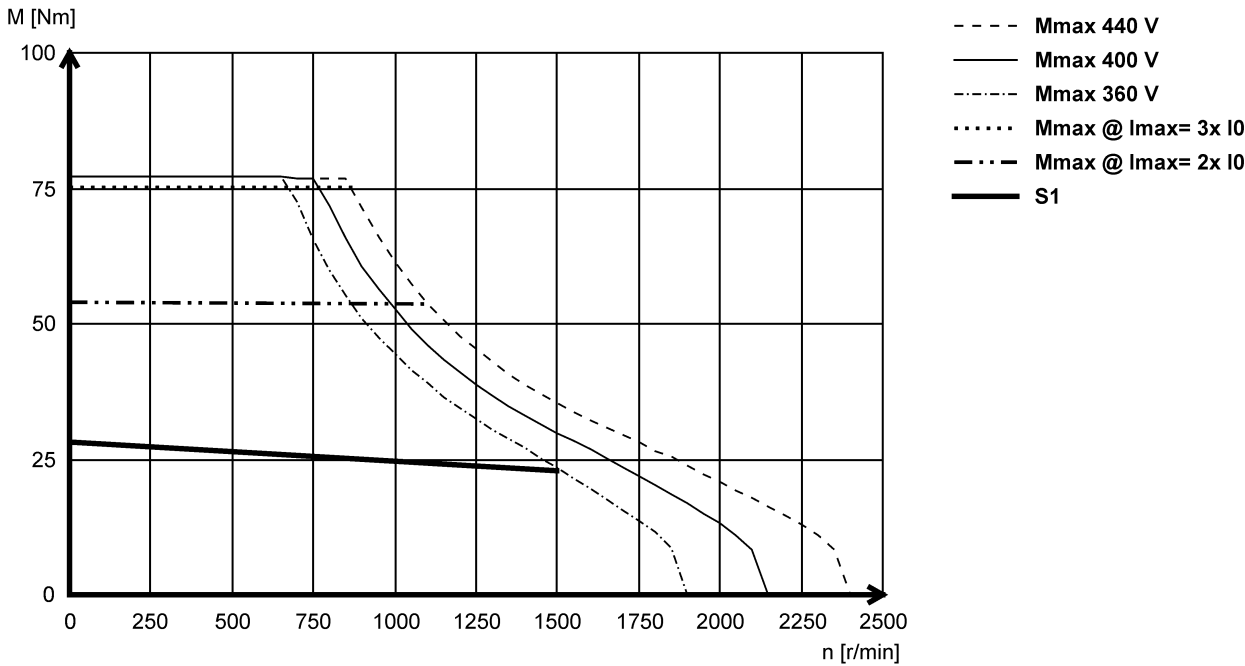





Technical data

Torque characteristics

MCS14L30- (forced ventilated)

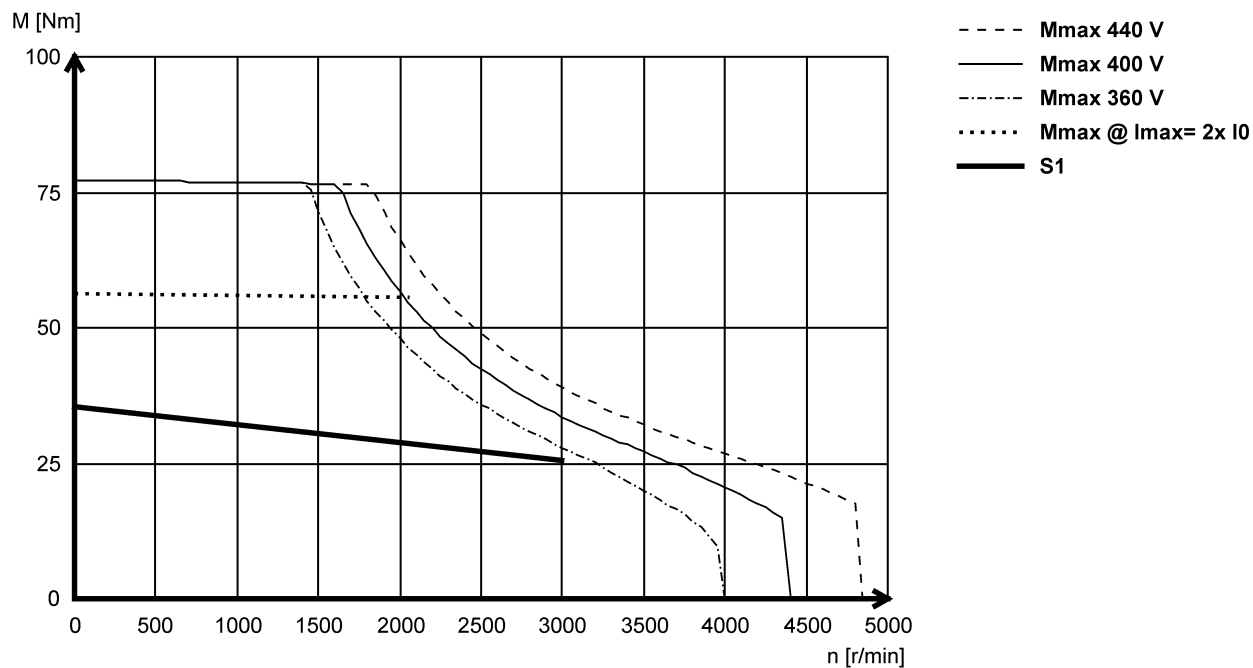


MCS14L32- (self-ventilated)

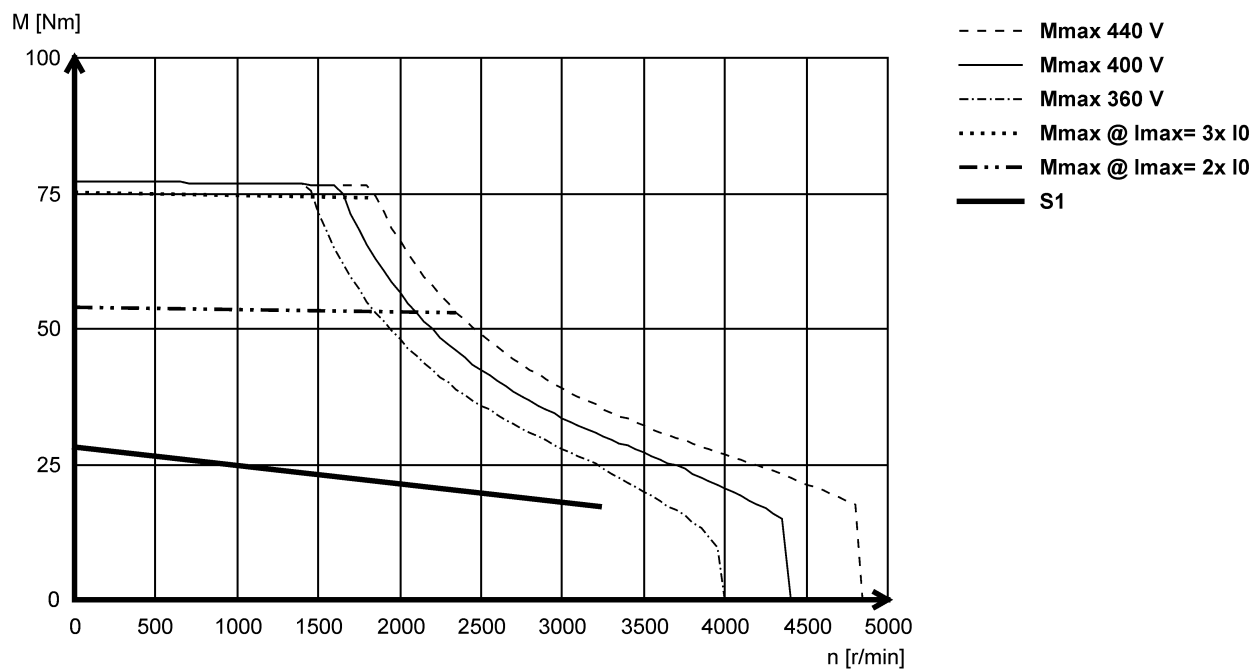




MCS14P11- (forced ventilated)

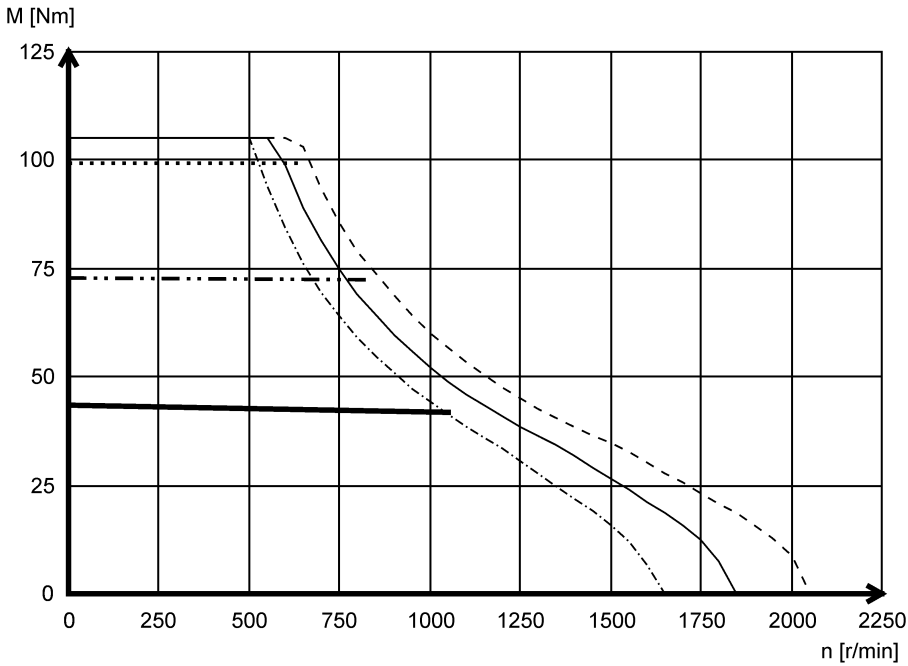

- Mmax 440 V
- Mmax 400 V
- · - Mmax 360 V
- Mmax @ I_{max}= 3x I₀
- - - Mmax @ I_{max}= 2x I₀
- S1

MCS14P14- (self-ventilated)

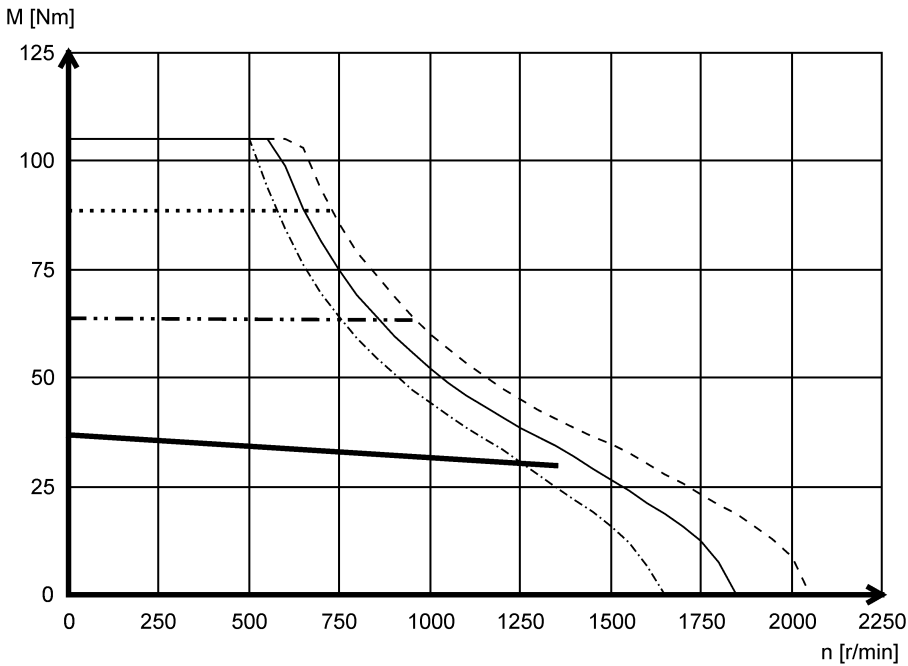


- Mmax 440 V
- Mmax 400 V
- · - Mmax 360 V
- Mmax @ I_{max}= 3x I₀
- - - Mmax @ I_{max}= 2x I₀
- S1




Technical data

Torque characteristics

MCS14P26- (forced ventilated)

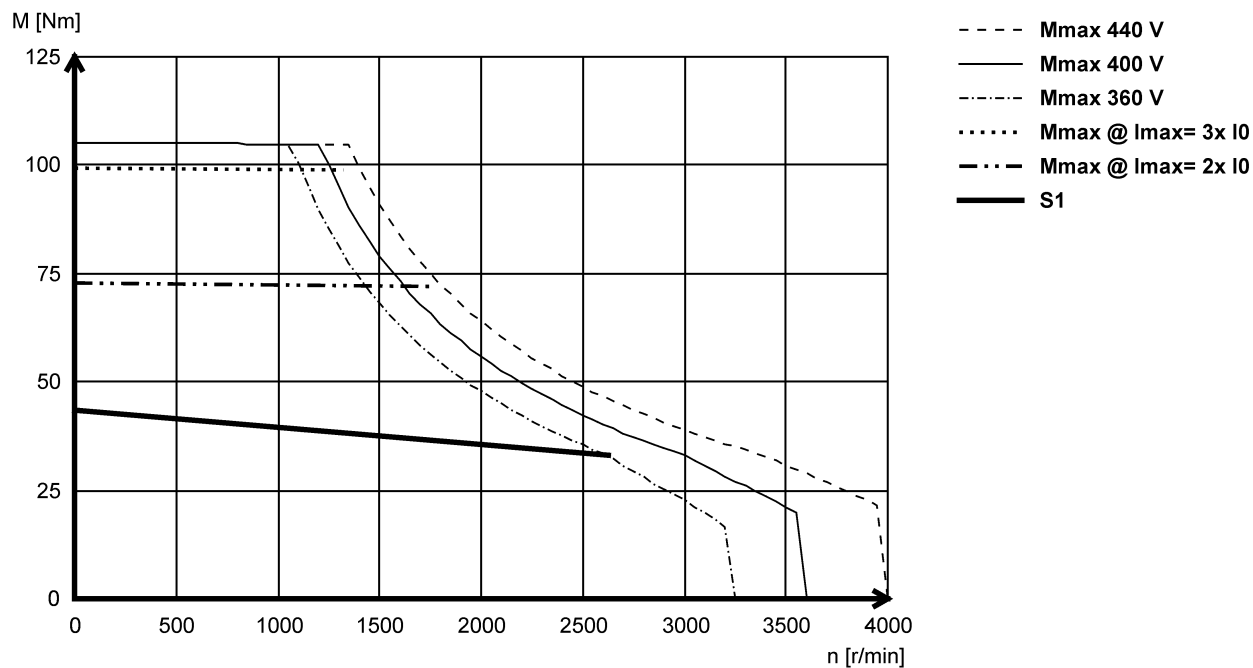


MCS14P32- (self-ventilated)

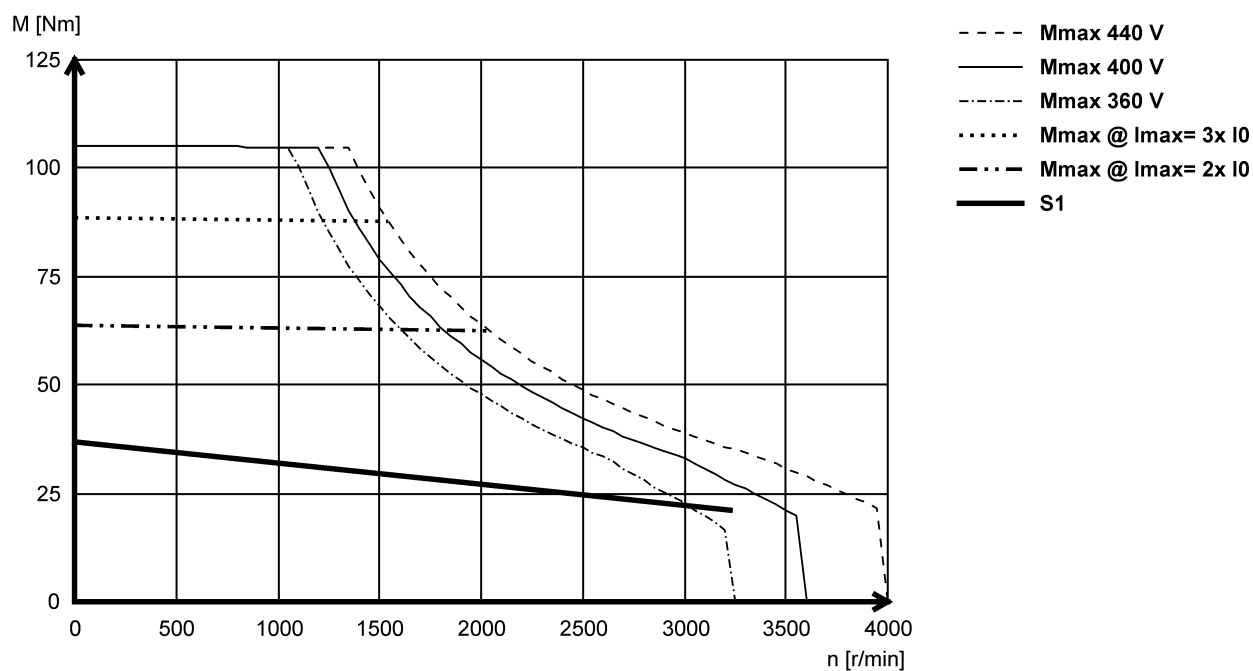




MCS19F12- (forced ventilated)

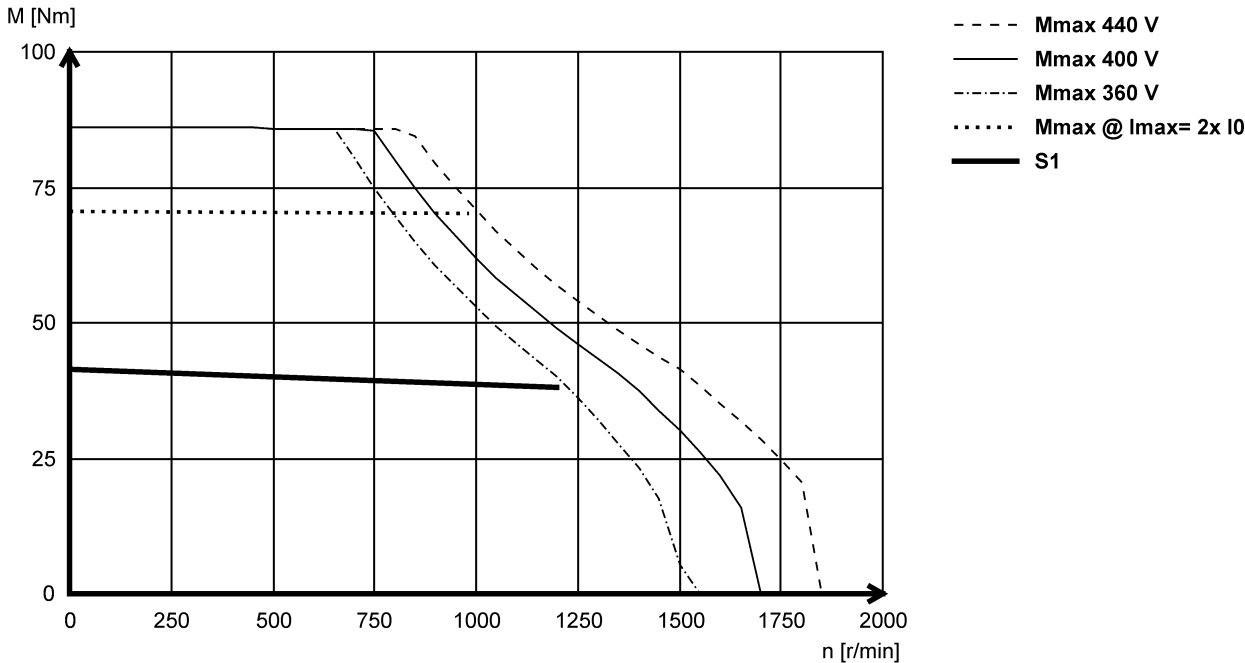

MCS19F14- (self-ventilated)

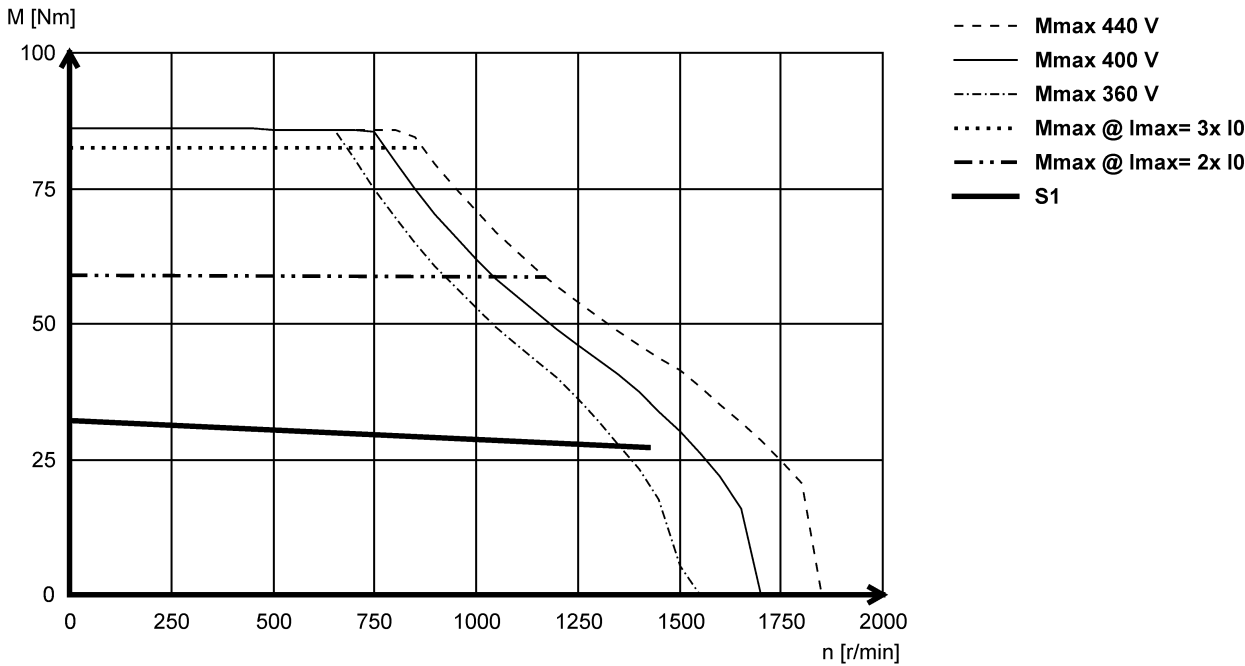





Technical data

Torque characteristics

MCS19F29- (forced ventilated)

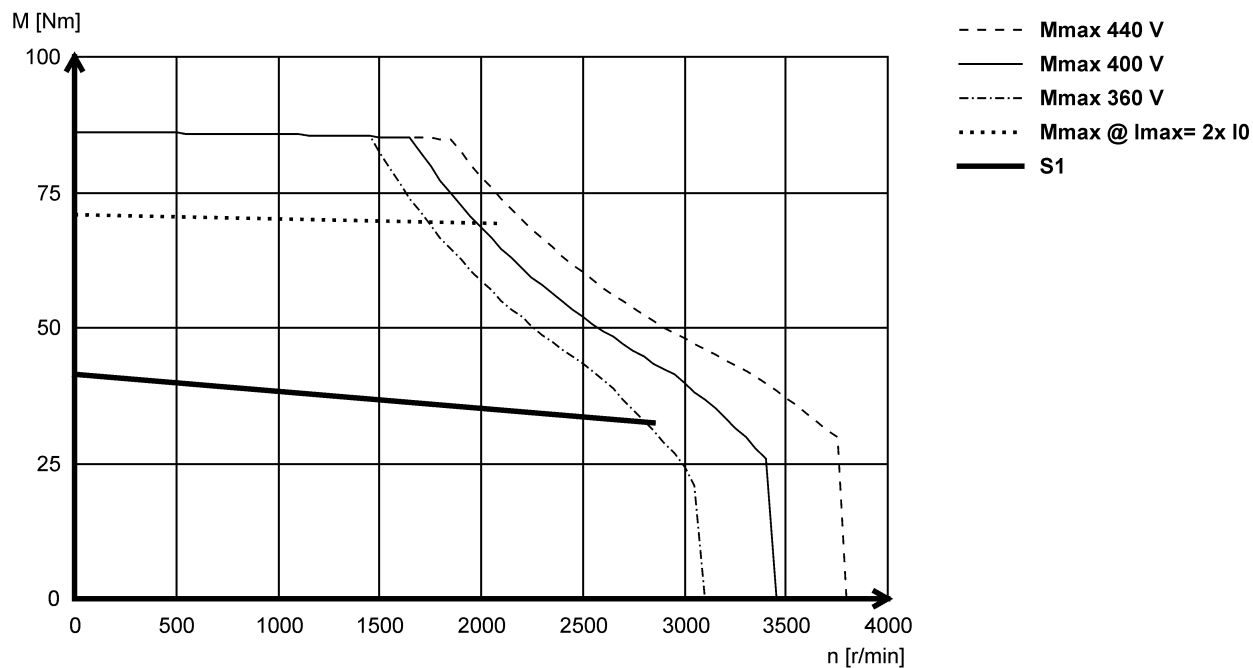


MCS19F30- (self-ventilated)

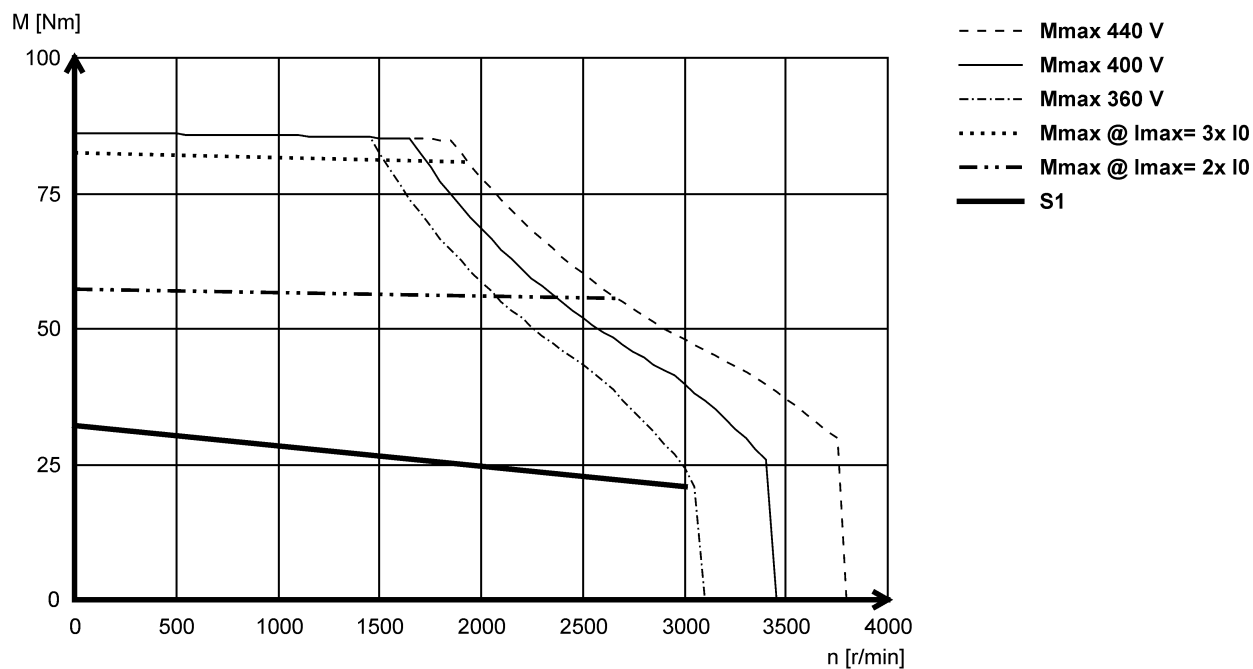




MCS19J12- (forced ventilated)

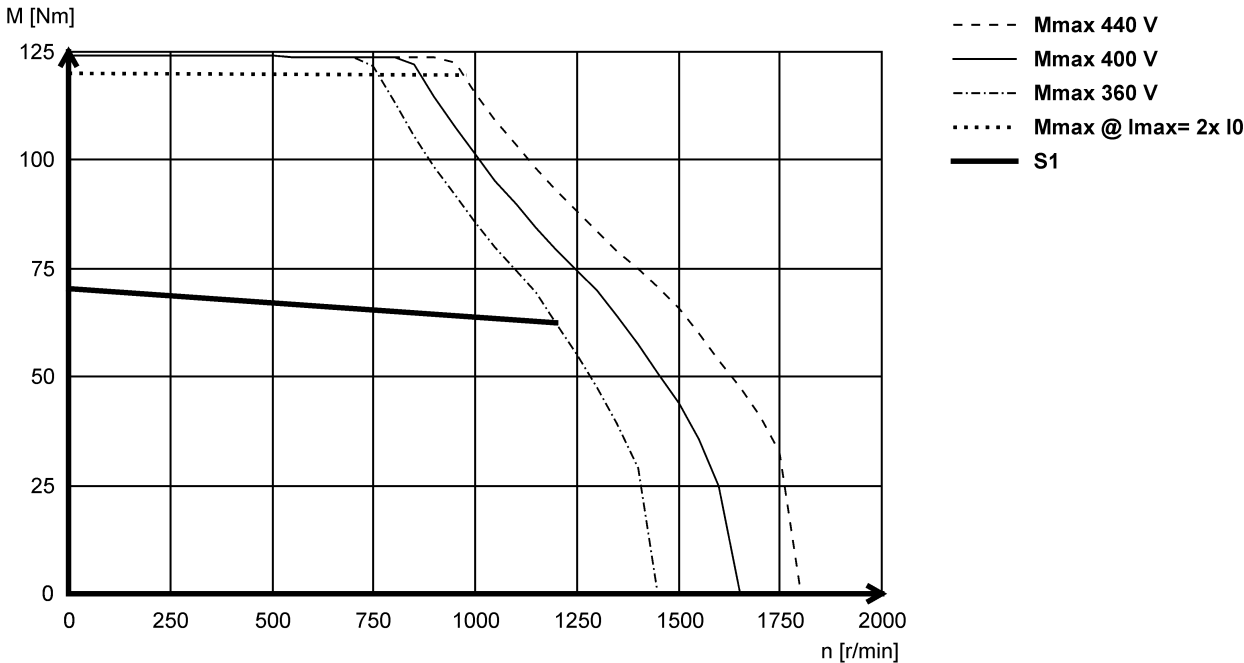

MCS19J14- (self-ventilated)

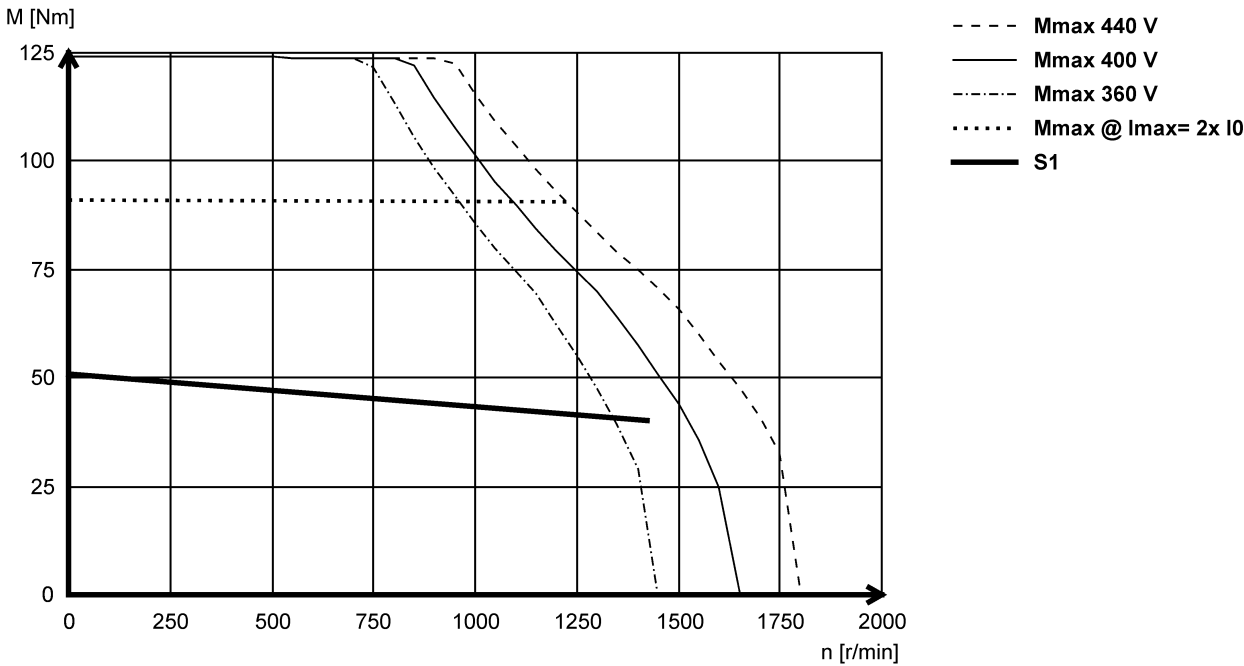





Technical data

Torque characteristics

MCS19J29- (forced ventilated)

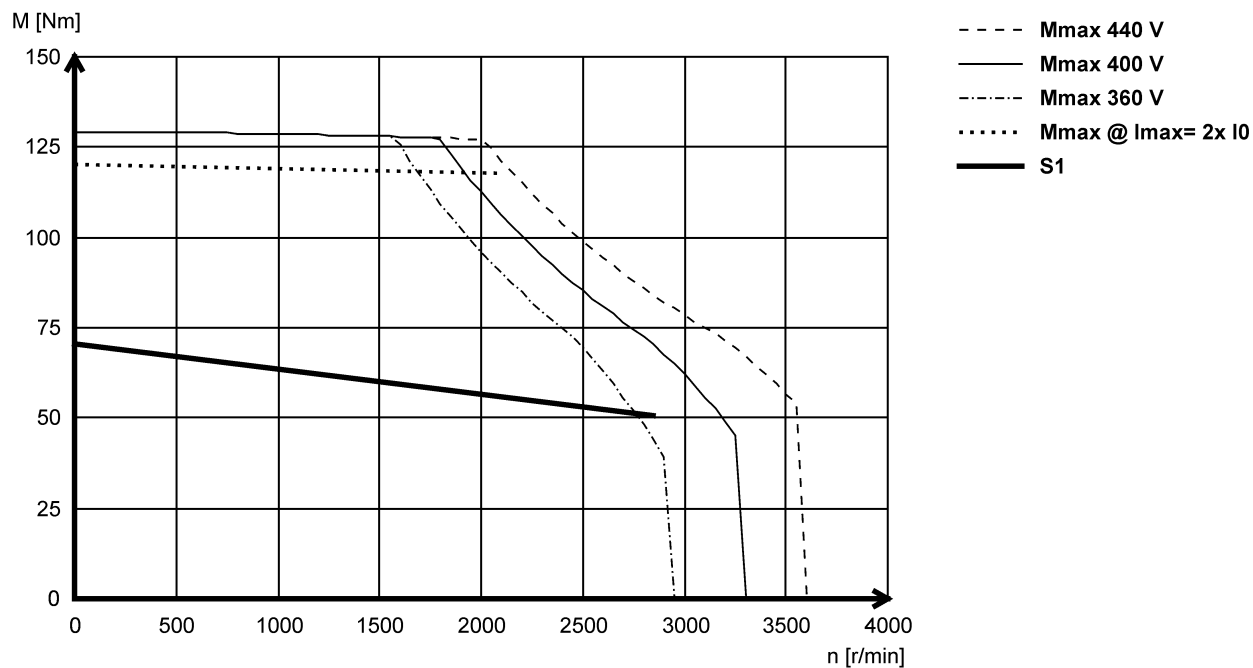


MCS19J30- (self-ventilated)

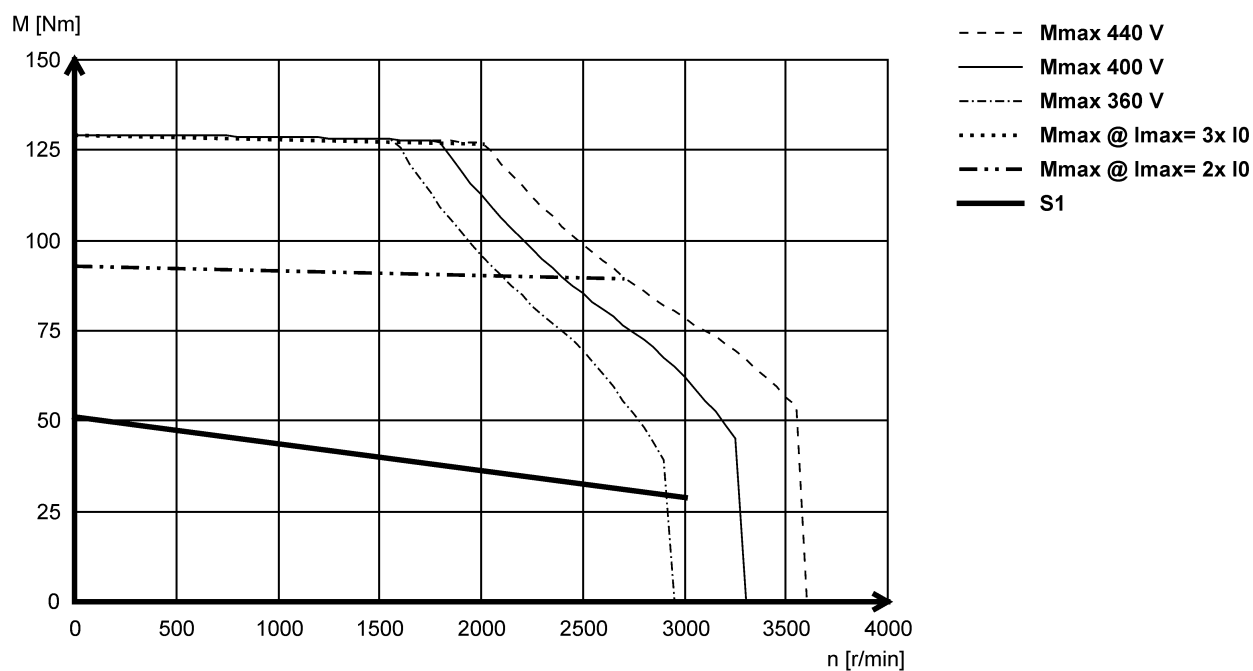




MCS19P12- (forced ventilated)

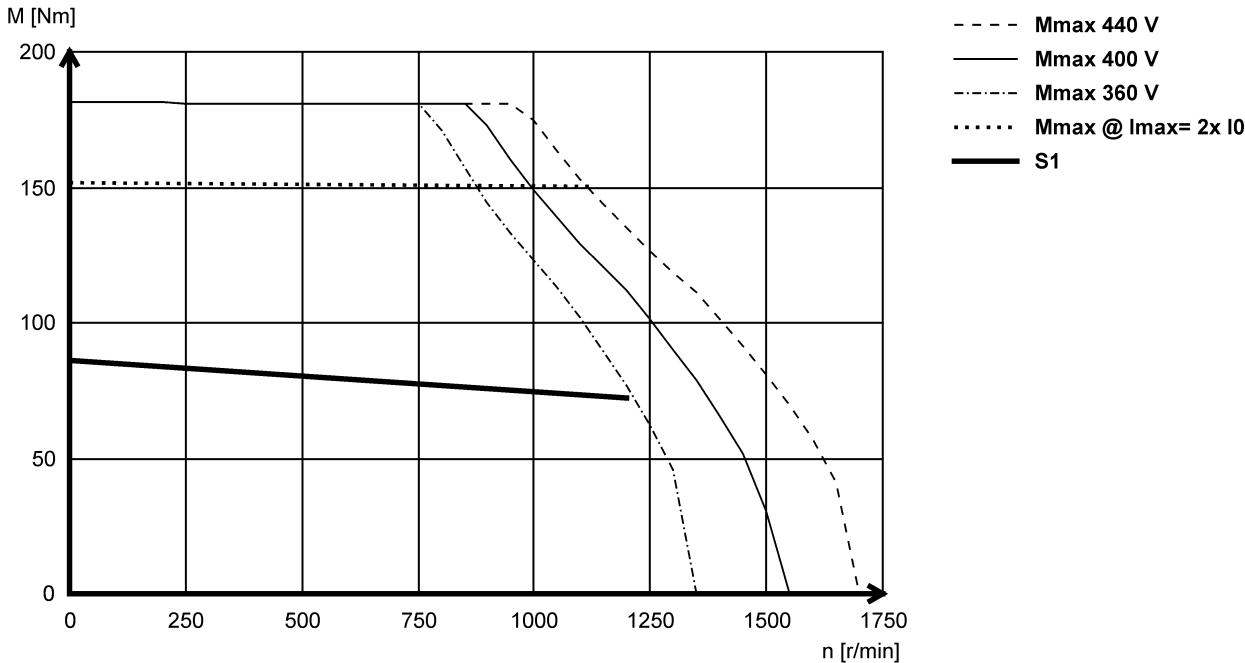

MCS19P14- (self-ventilated)

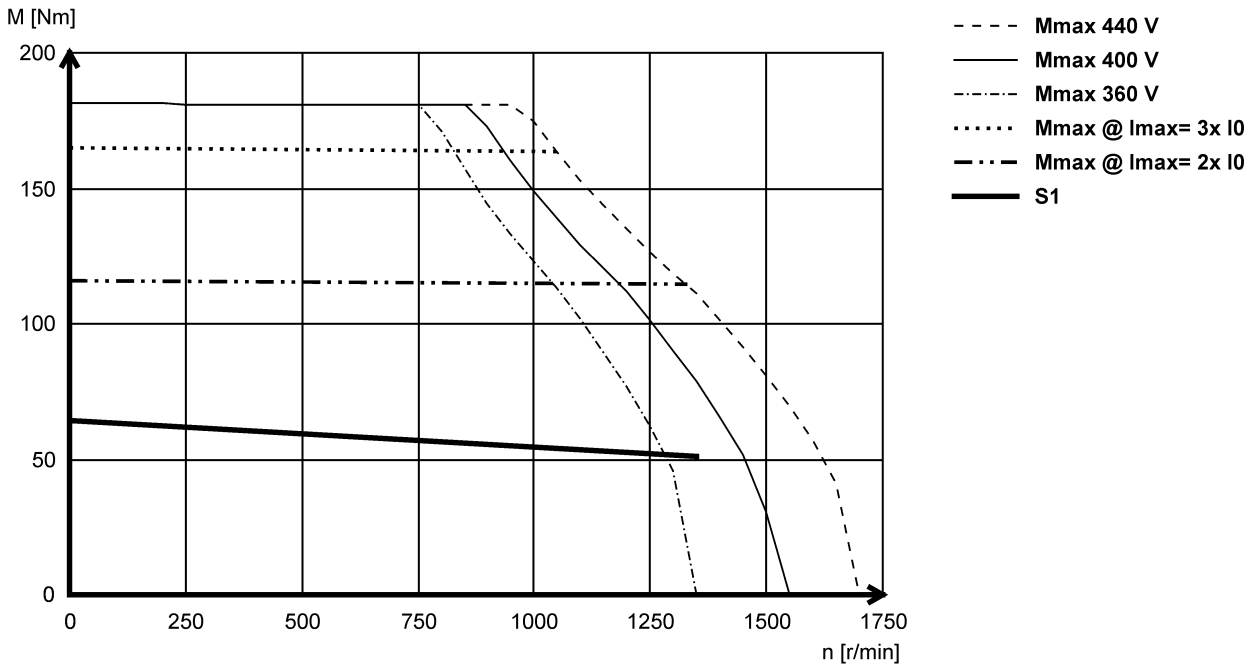





Technical data

Torque characteristics

MCS19P29- (forced ventilated)

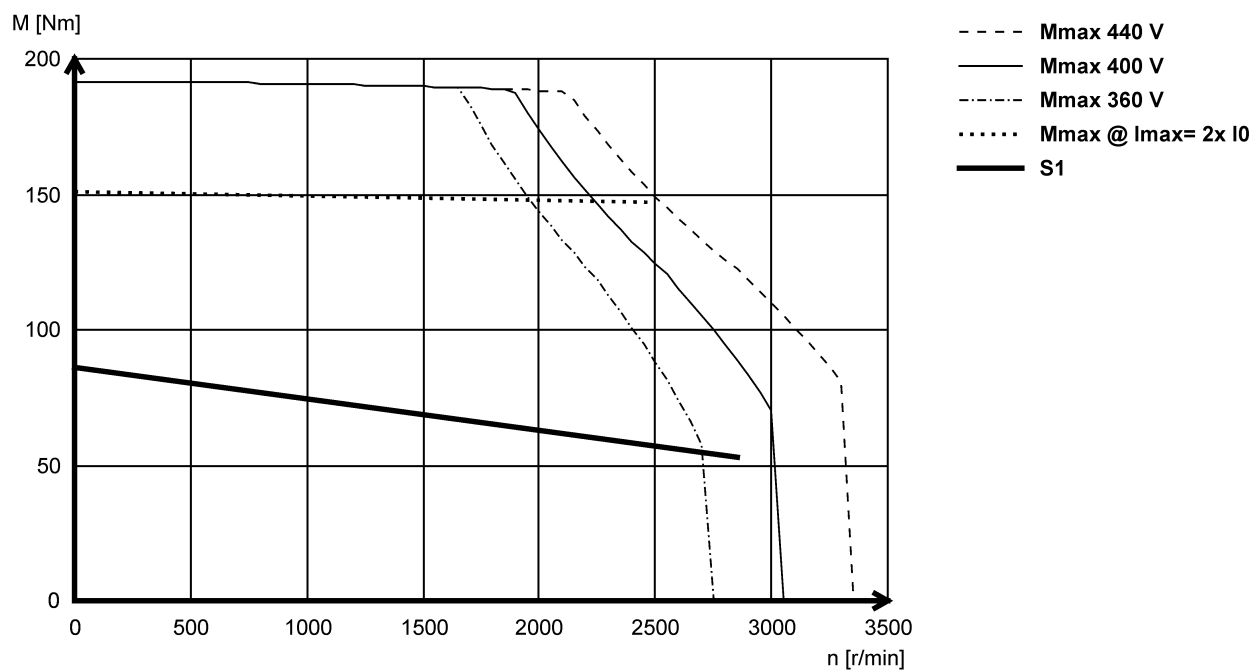


MCS19P30- (self-ventilated)

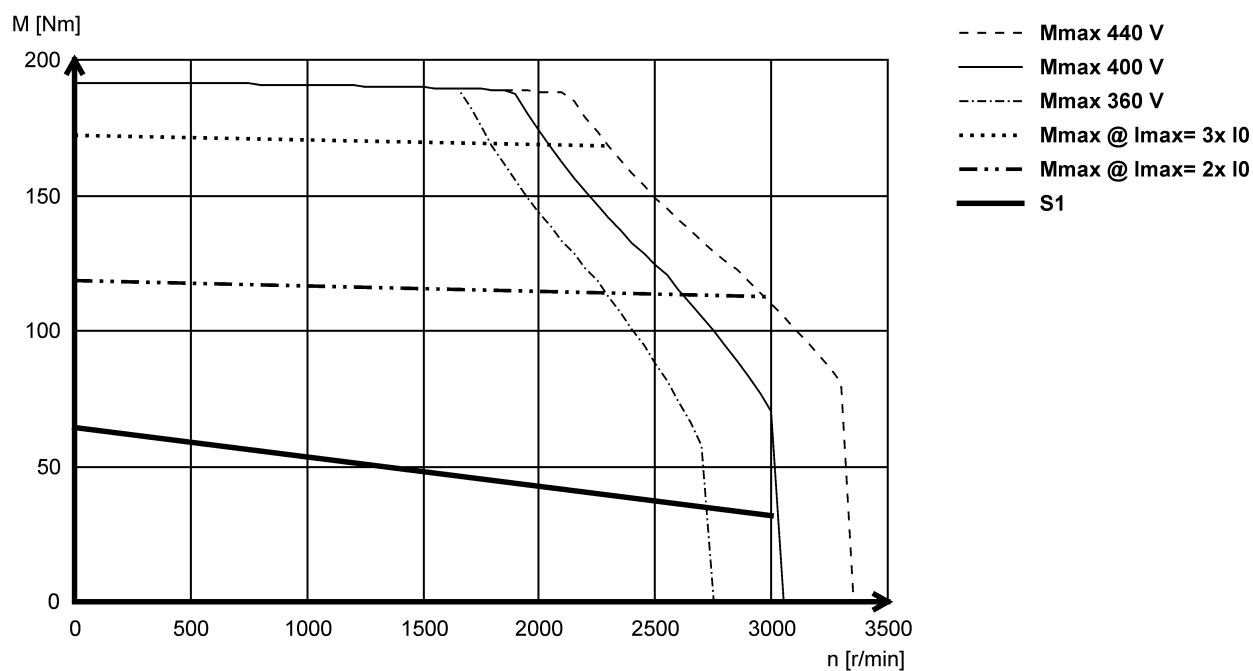




The following data apply to an inverter mains voltage 3 x 230 V.

MCS06C41L (self-ventilated)

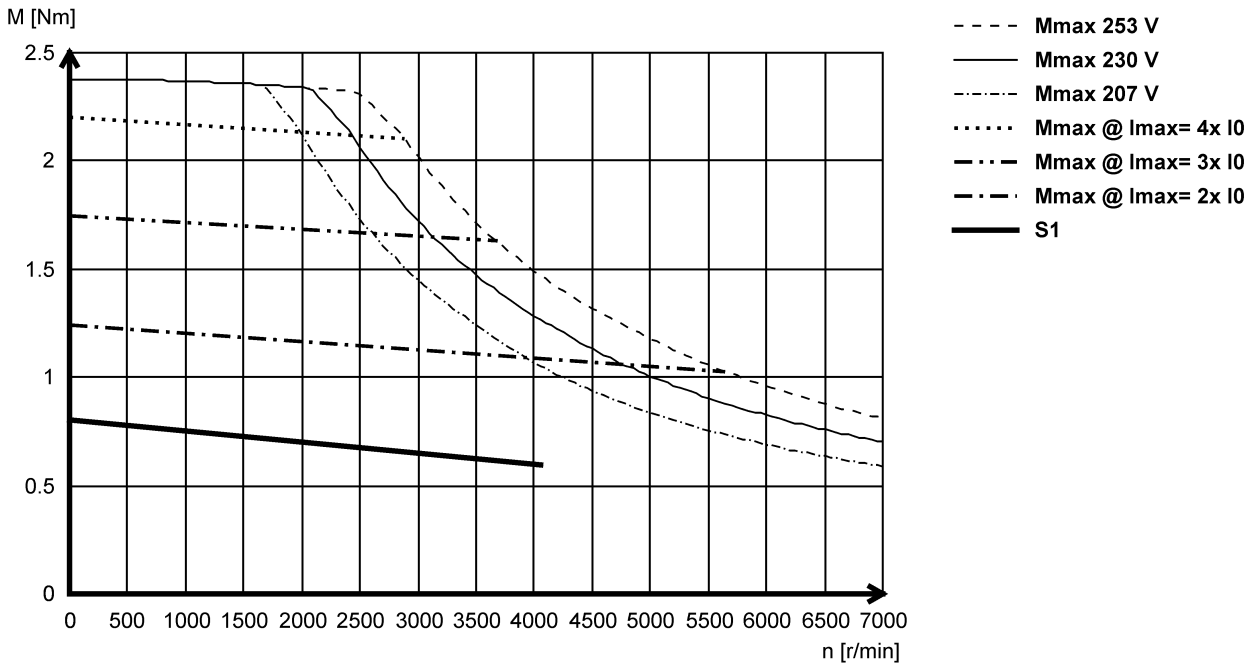

MCS06C60L- (self-ventilated)

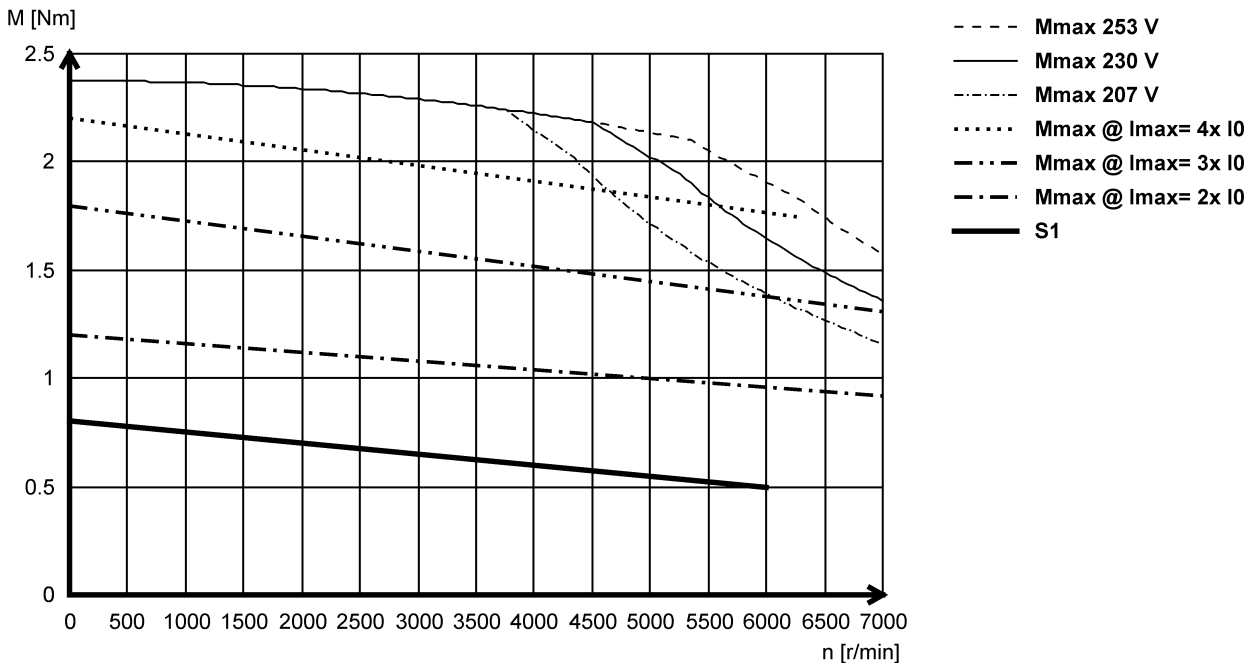




Technical data


Torque characteristics

MCS06F41L (self-ventilated)

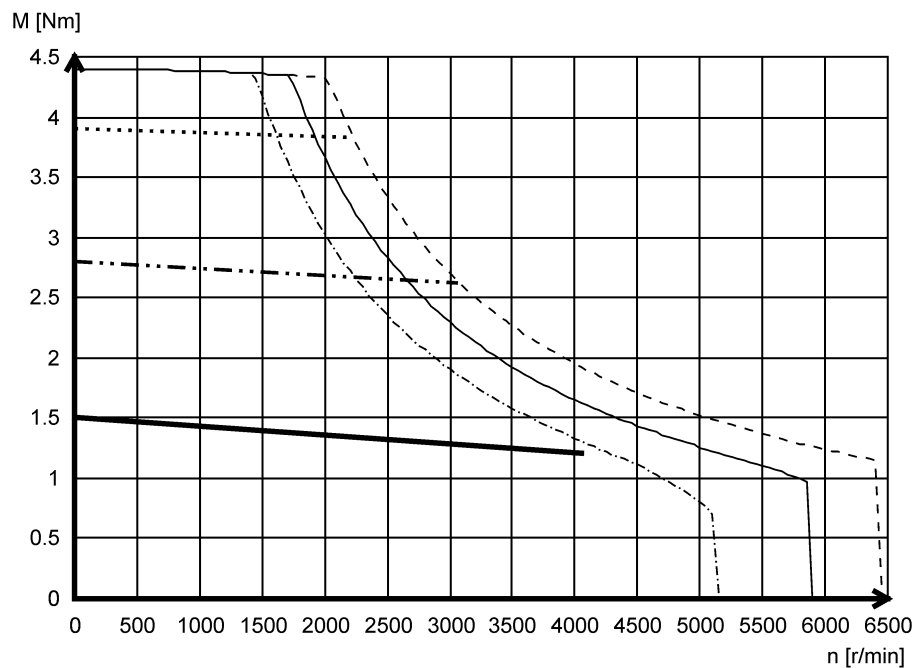

- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 3x I₀
- · · Mmax @ Imax= 2x I₀
- S1


MCS06F60L- (self-ventilated)

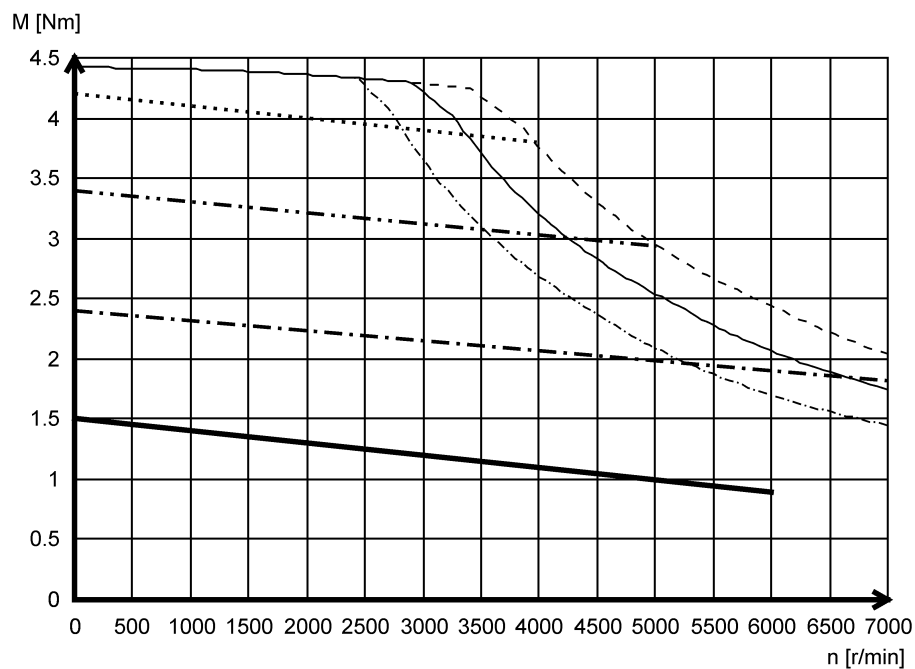

- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 4x I₀
- · · Mmax @ Imax= 3x I₀
- · · · Mmax @ Imax= 2x I₀
- S1




MCS06I41L (self-ventilated)

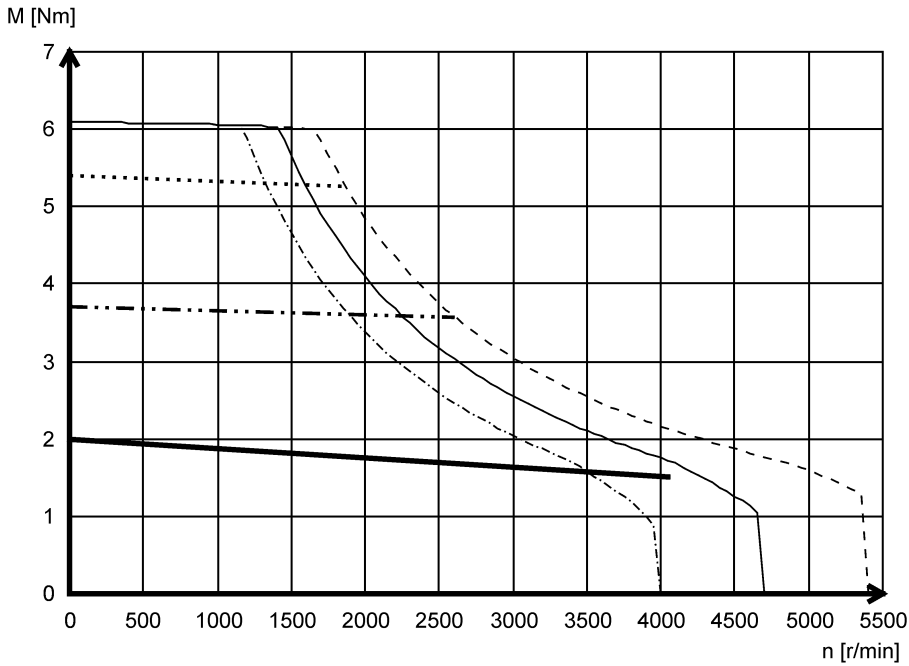

- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 3x I0
- - - Mmax @ Imax= 2x I0
- S1

MCS06I60L- (self-ventilated)

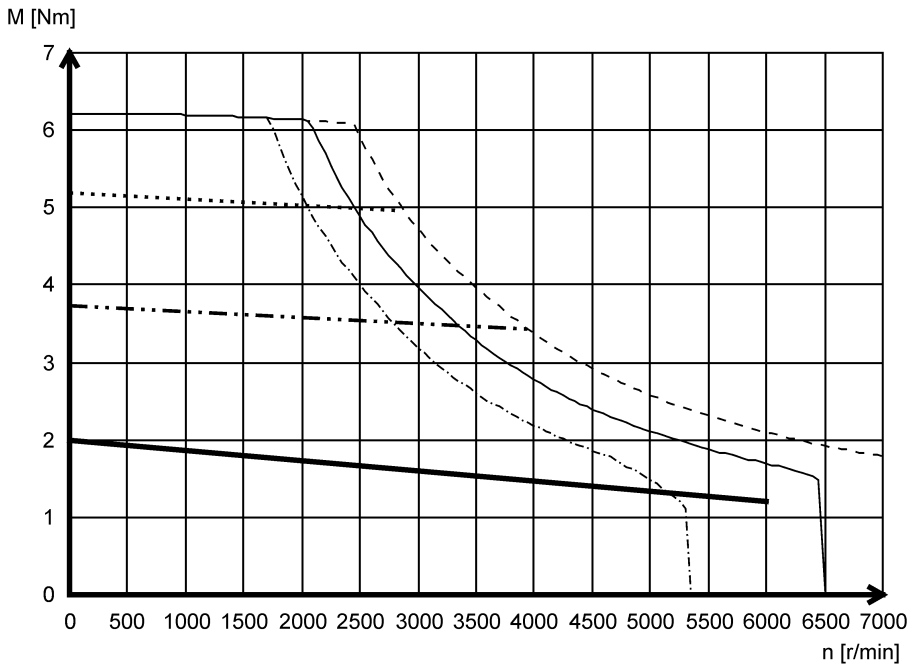


- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 3x I0
- - - Mmax @ Imax= 2x I0
- S1



Technical data


Torque characteristics

MCS09D41L (self-ventilated)

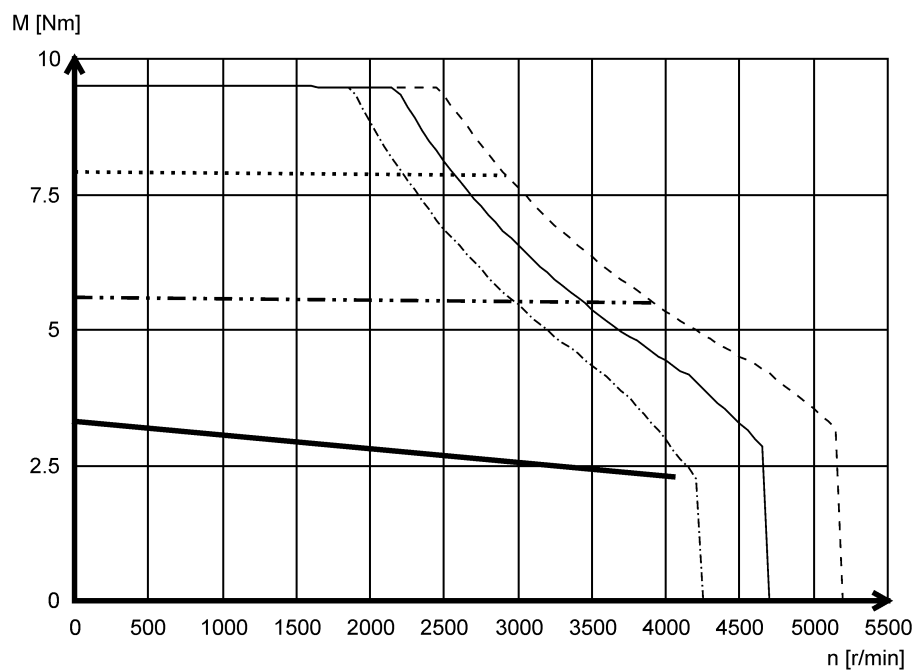

- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 3x I0
- · · - Mmax @ Imax= 2x I0
- S1


MCS09D60L (self-ventilated)

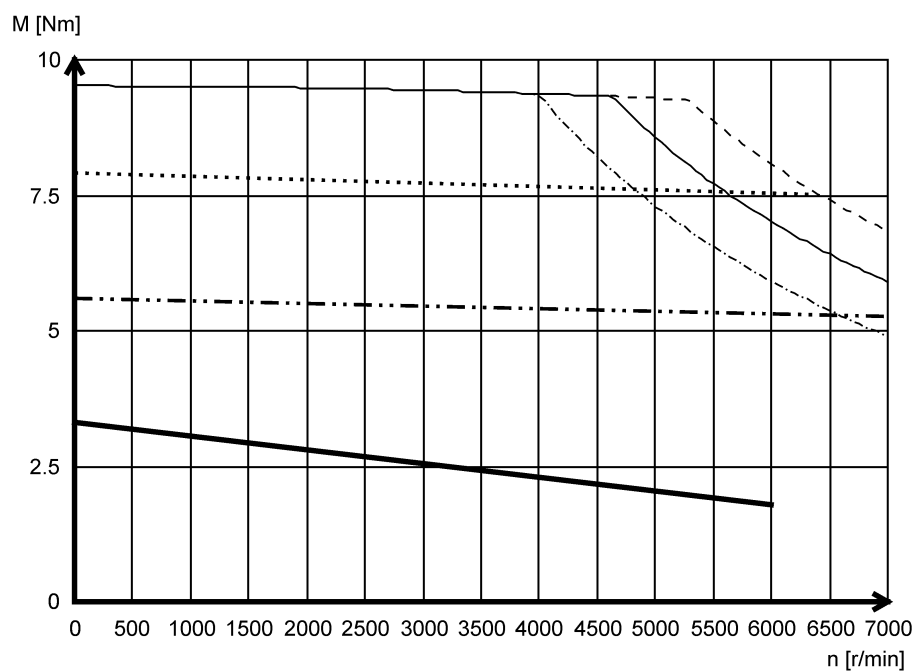


- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 3x I0
- · · - Mmax @ Imax= 2x I0
- S1



MCS09F38L (self-ventilated)

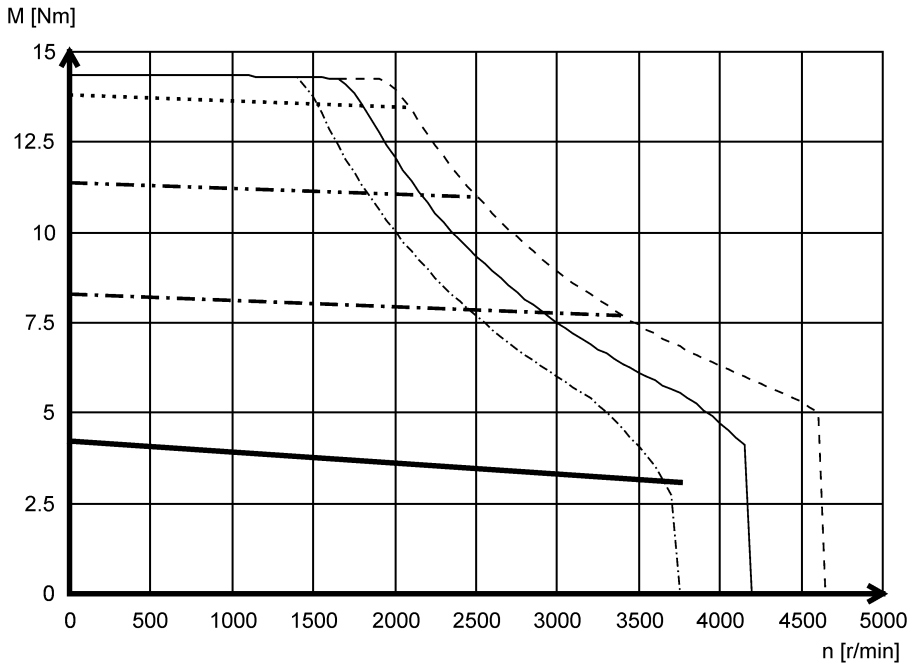

MCS09F60L (self-ventilated)

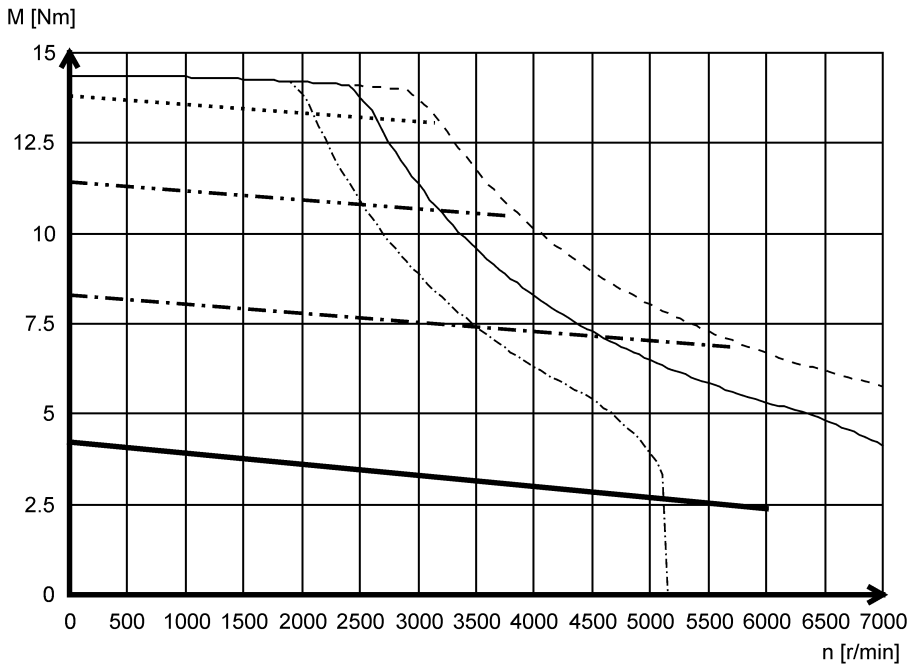




Technical data


Torque characteristics

MCS09H41L (self-ventilated)

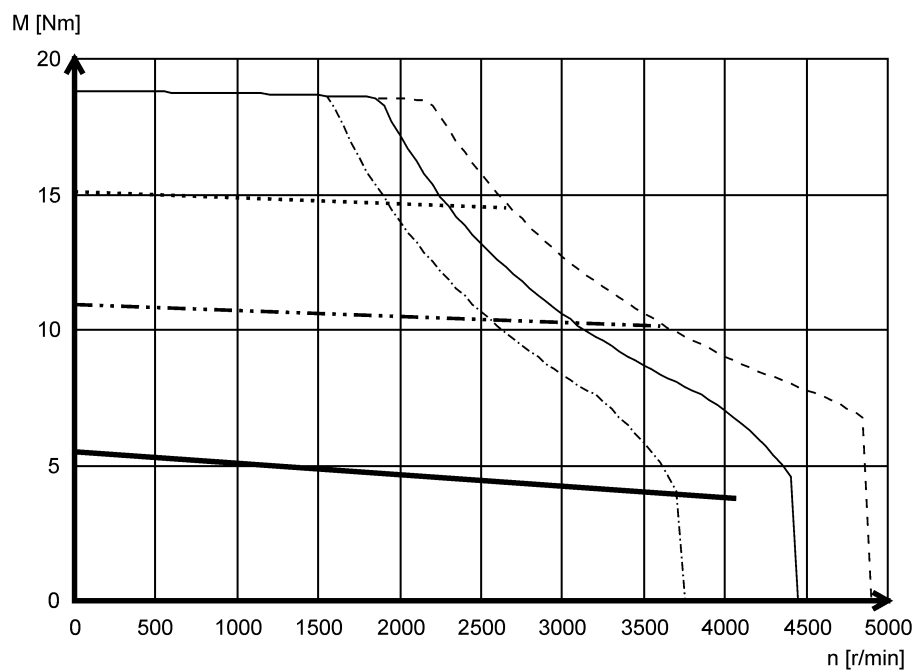

- Mmax 253 V
- Mmax 230 V
- · - · Mmax 207 V
- Mmax @ Imax= 3x I0
- · · - Mmax @ Imax= 2x I0
- S1


MCS09H60L (self-ventilated)

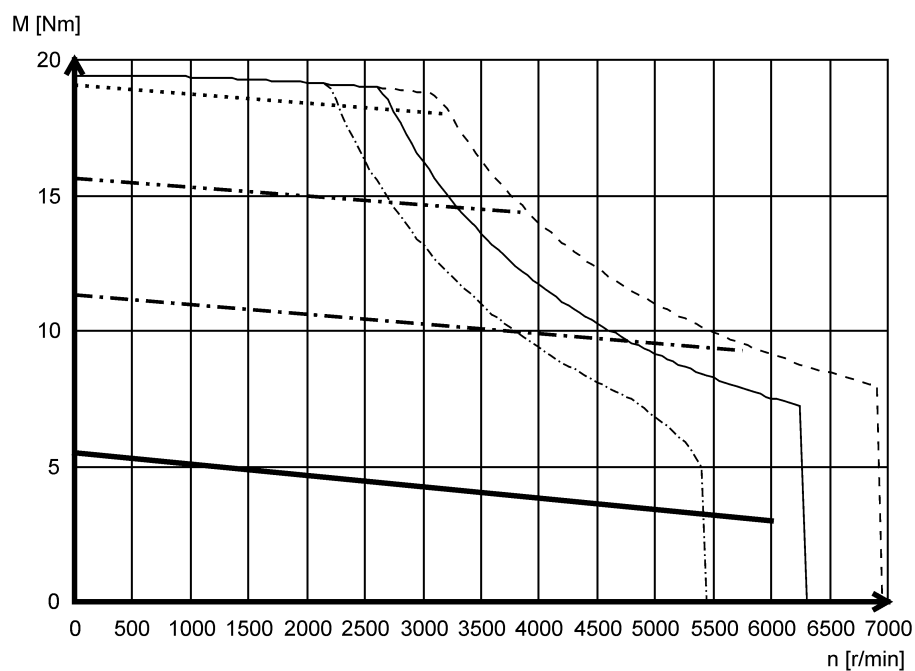

- Mmax 253 V
- Mmax 230 V
- · - · Mmax 207 V
- Mmax @ Imax= 4x I0
- · · - Mmax @ Imax= 3x I0
- · - · Mmax @ Imax= 2x I0
- S1




MCS09L41L (self-ventilated)

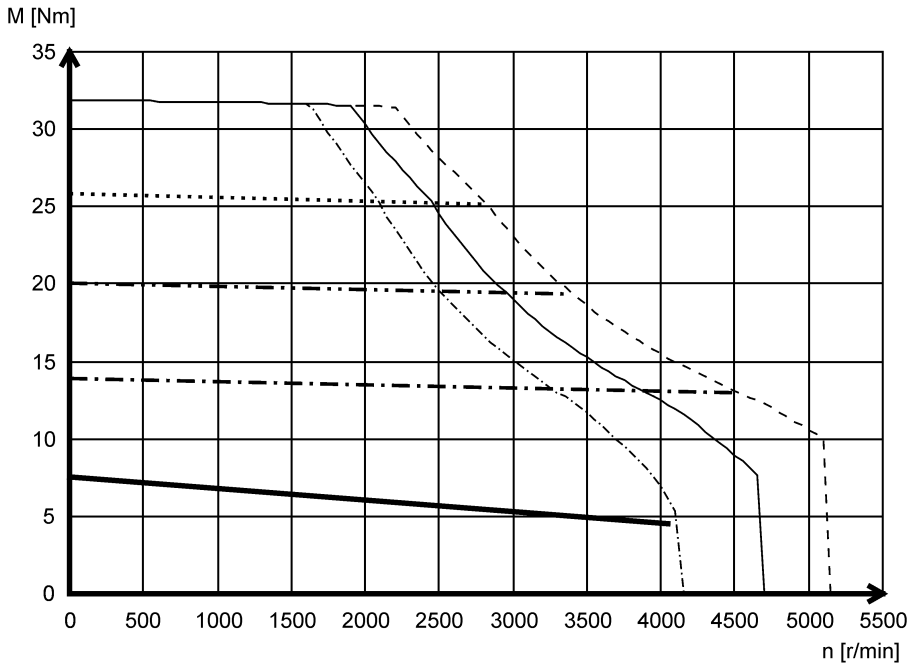

- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 4x I0
- · · - Mmax @ Imax= 3x I0
- · · · Mmax @ Imax= 2x I0
- S1

MCS12D20L (self-ventilated)

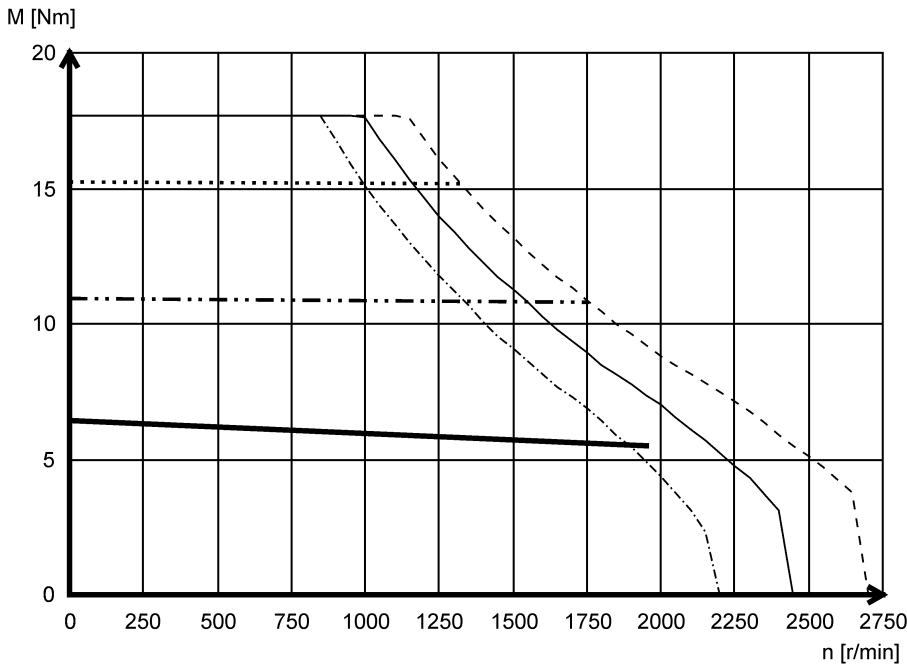


- Mmax 253 V
- Mmax 230 V
- · - Mmax 207 V
- Mmax @ Imax= 3x I0
- · · - Mmax @ Imax= 2x I0
- · · · Mmax @ Imax= 1x I0
- S1




Technical data

Torque characteristics

MCS12D41L (self-ventilated)

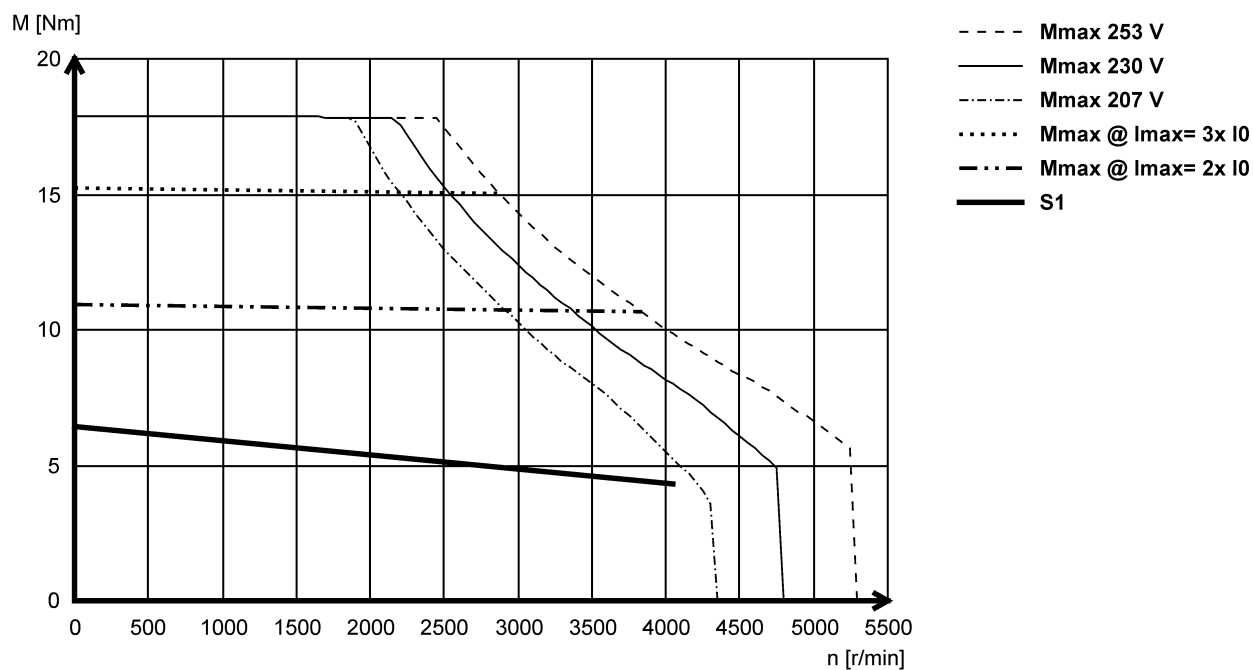


MCS12H15L (self-ventilated)

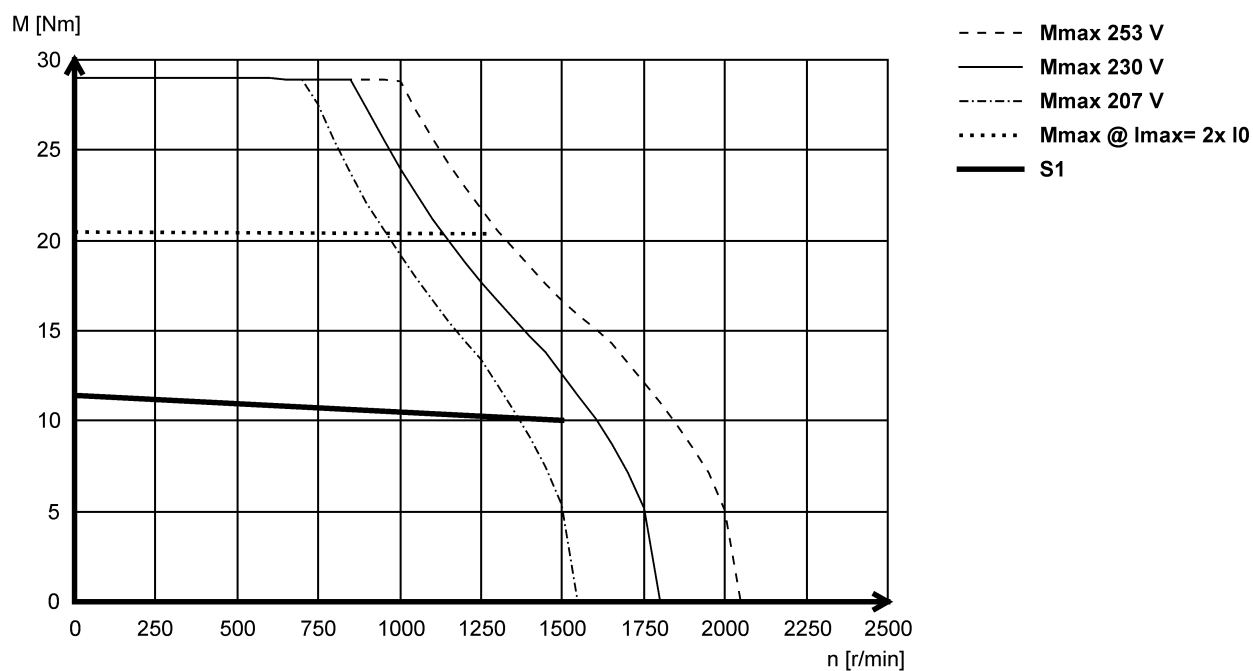




MCS12H30L- (self-ventilated)

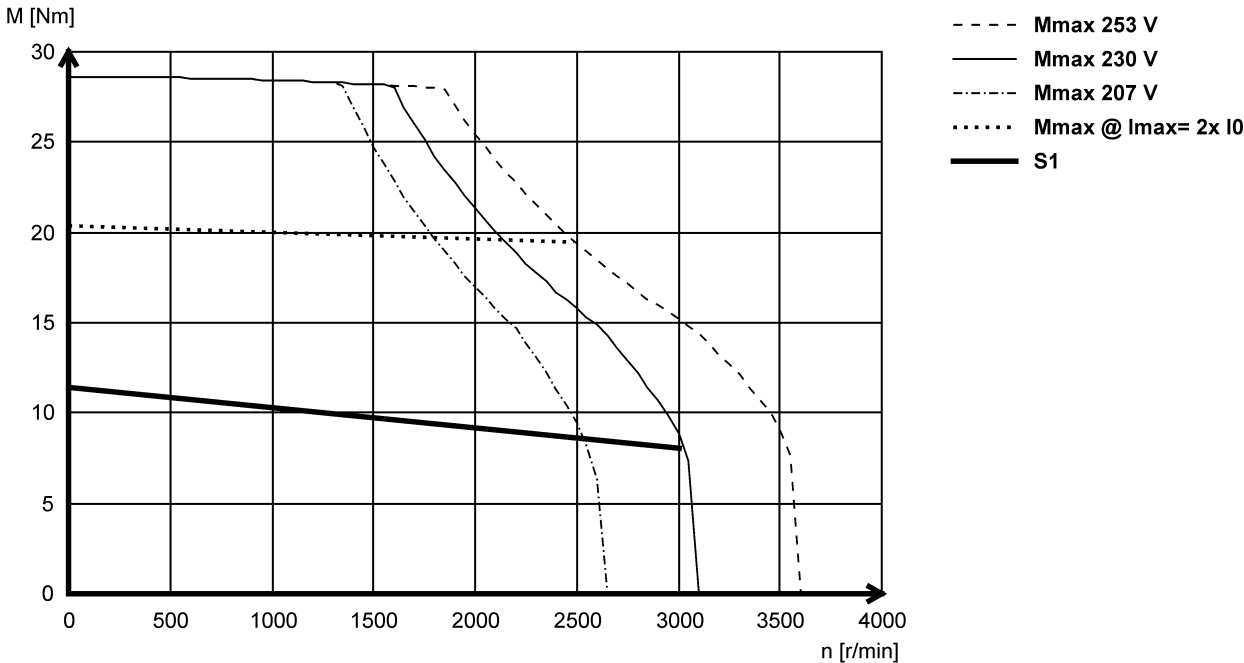

MCS12L20L (self-ventilated)

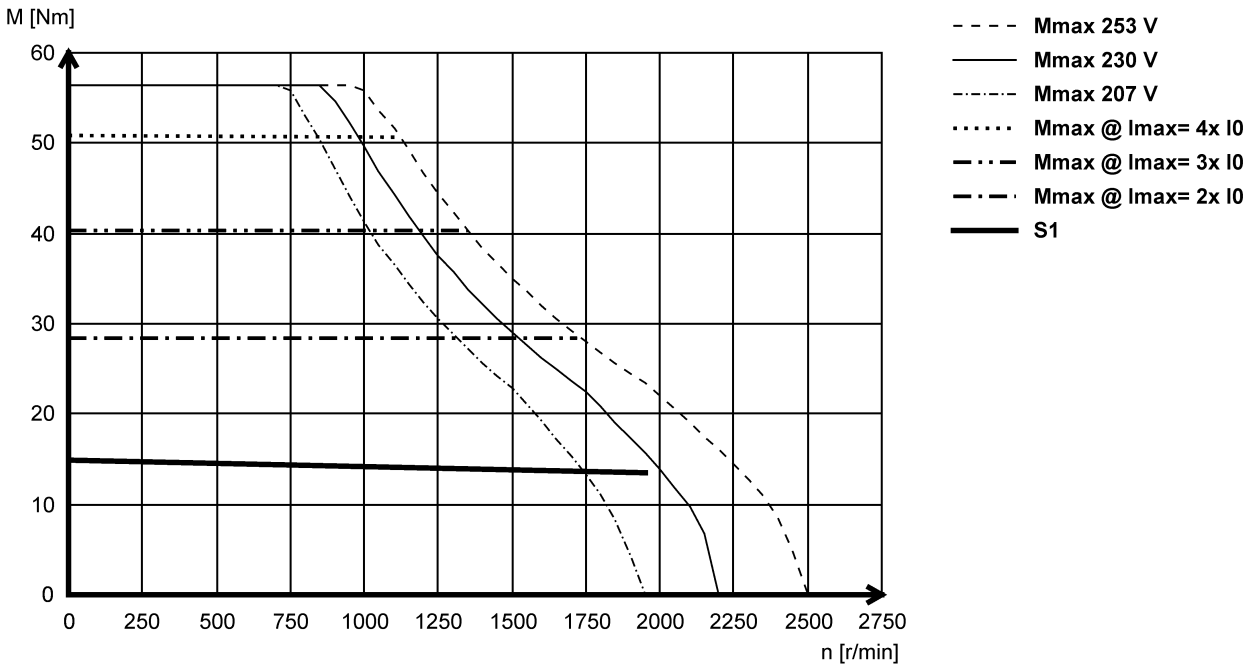



Dimensions

Notes on the basic dimensions



The dimensions also apply for motors with One Cable Technology (OCT).

Table content

Explanation

Total length without brake	L	Total length of the drive with resolver
Total length with brake	L	Total length of the drive with resolver
Motor/connection distance	AD	Distance from center of motor to end of connector/terminal box

Technical data


Dimensions
Basic dimensions



Basic dimensions

MCS06, self-ventilated

Design B5-FF75

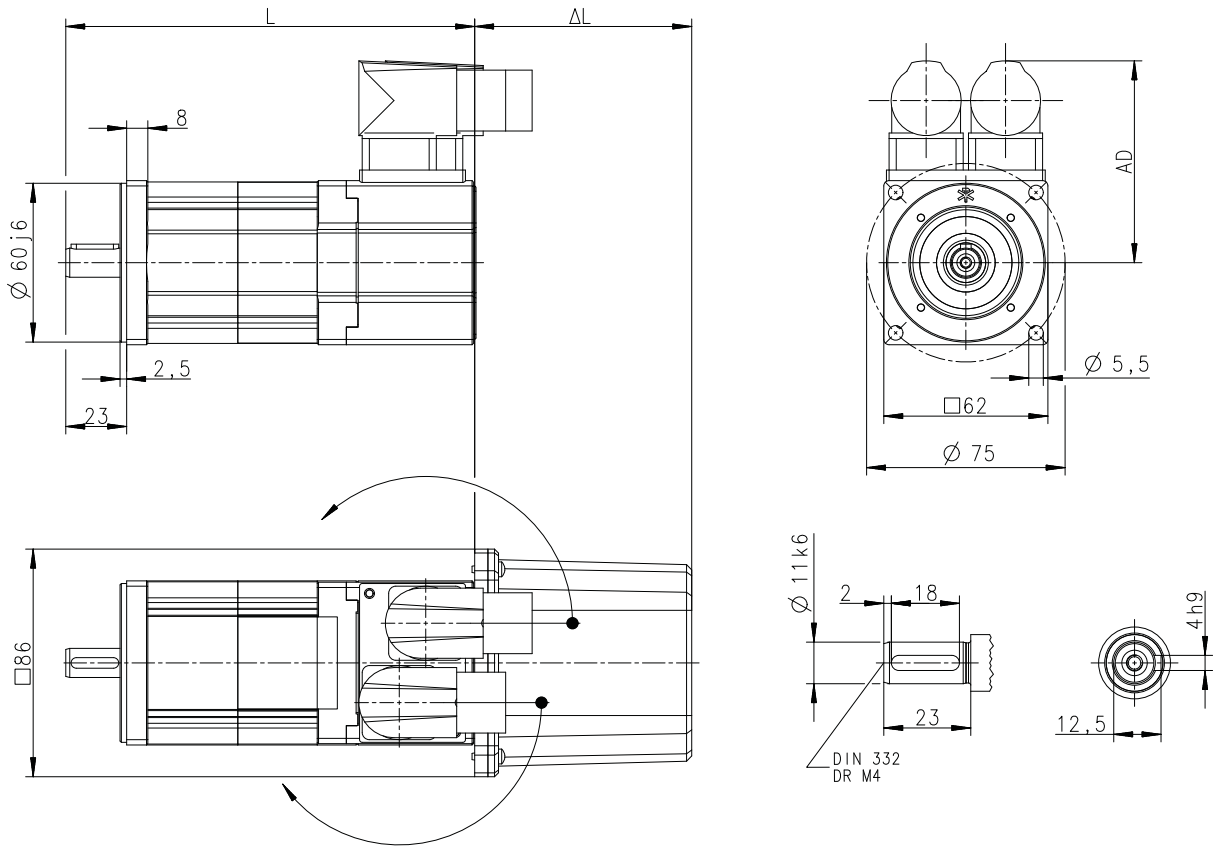

8800650-00

Motor			MCS 06C41- MCS 06C41L	MCS 06C60- MCS 06C60L	MCS 06F41- MCS 06F41L	MCS 06F60- MCS 06F60L	MCS 06I41- MCS 06I41L	MCS 06I60- MCS 06I60L
Total length without brake	L	mm	155		185		215	
Total length with brake	L	mm	174		204		234	
Motor/connection distance	AD	mm	77					

ΔL ▶ [Additional lengths](#) 106




Technical data

Dimensions
Basic dimensions

MCS09, self-ventilated

Design B5-FF100

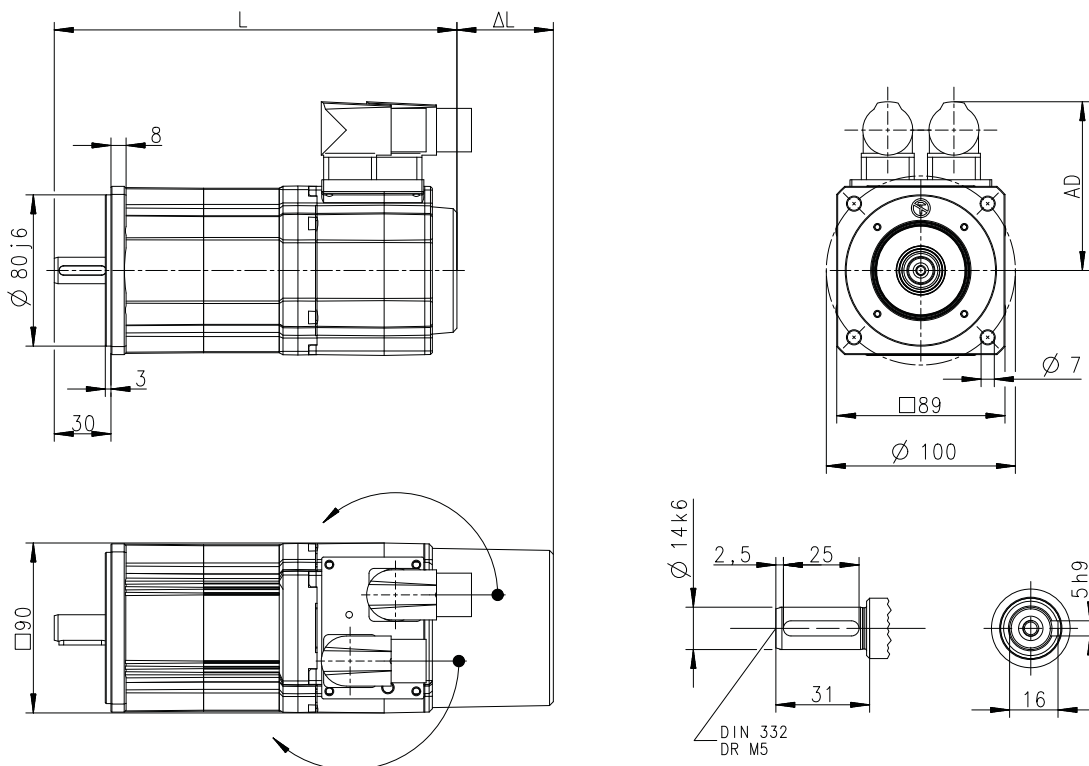

8800651-00

Motor			MCS 09D41- MCS 09D41L	MCS 09D60- MCS 09D60L	MCS 09F38- MCS 09F38L	MCS 09F60- MCS 09F60L	MCS 09H41- MCS 09H41L	MCS 09H60- MCS 09H60L
Total length without brake	L	mm	213		233		253	
Total length with brake	L	mm	233		253		273	
Motor/connection distance	AD	mm	90					

Motor			MCS 09L41- MCS 09L41L		MCS 09L51-	
Total length without brake	L	mm	293			
Total length with brake	L	mm	313			
Motor/connection distance	AD	mm	90			

ΔL ▶ Additional lengths [106](#)


Technical data

Dimensions
Basic dimensions



MCS12, self-ventilated

Design B5-FF130

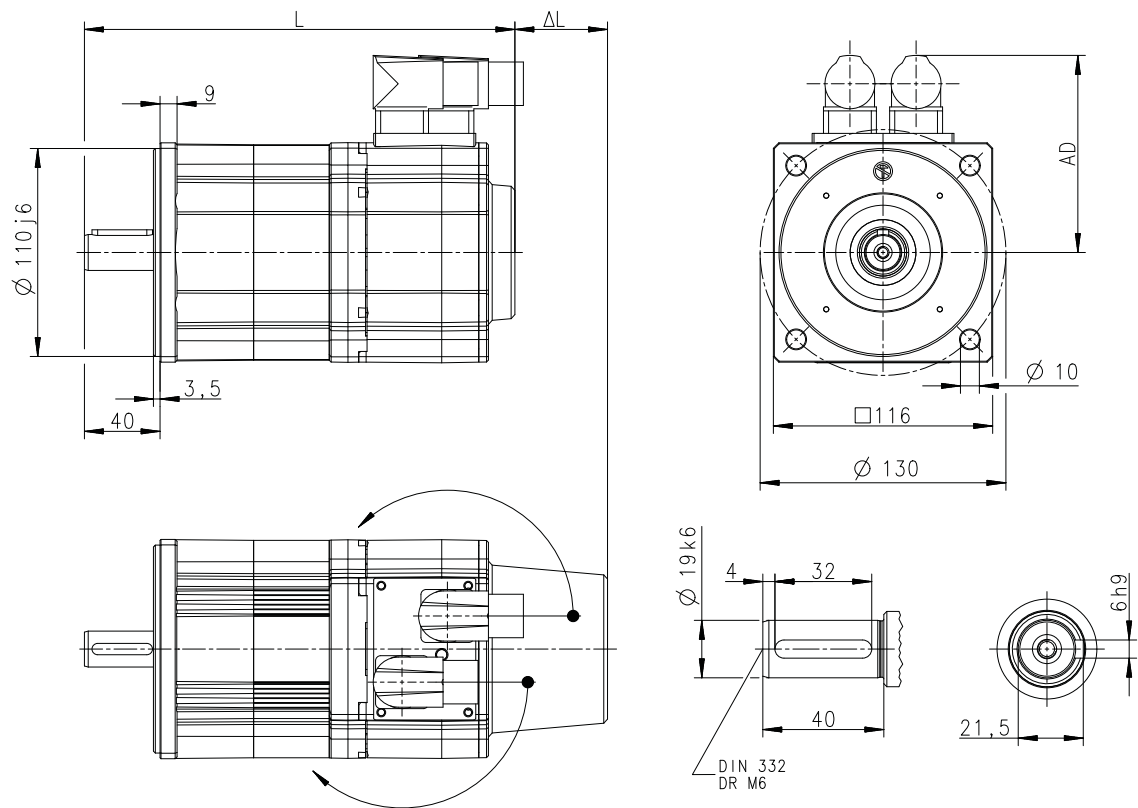

8800652-00

Motor			MCS 12D20- MCS 12D20L	MCS 12D41- MCS 12D41L	MCS 12H15- MCS 12H15L	MCS 12H30L	MCS 12H35-	MCS 12L20- MCS 12L20L
Total length without brake	L	mm	228		268			308
Total length with brake	L	mm	248		288			328
Motor/connection distance	AD	mm	105					

Motor			MCS 12L41-					
Total length without brake	L	mm	308					
Total length with brake	L	mm	328					
Motor/connection distance	AD	mm	105					

Δ L ▶ Additional lengths 106




Technical data

Dimensions
Basic dimensions

MCS12, forced ventilated

Design B5-FF130

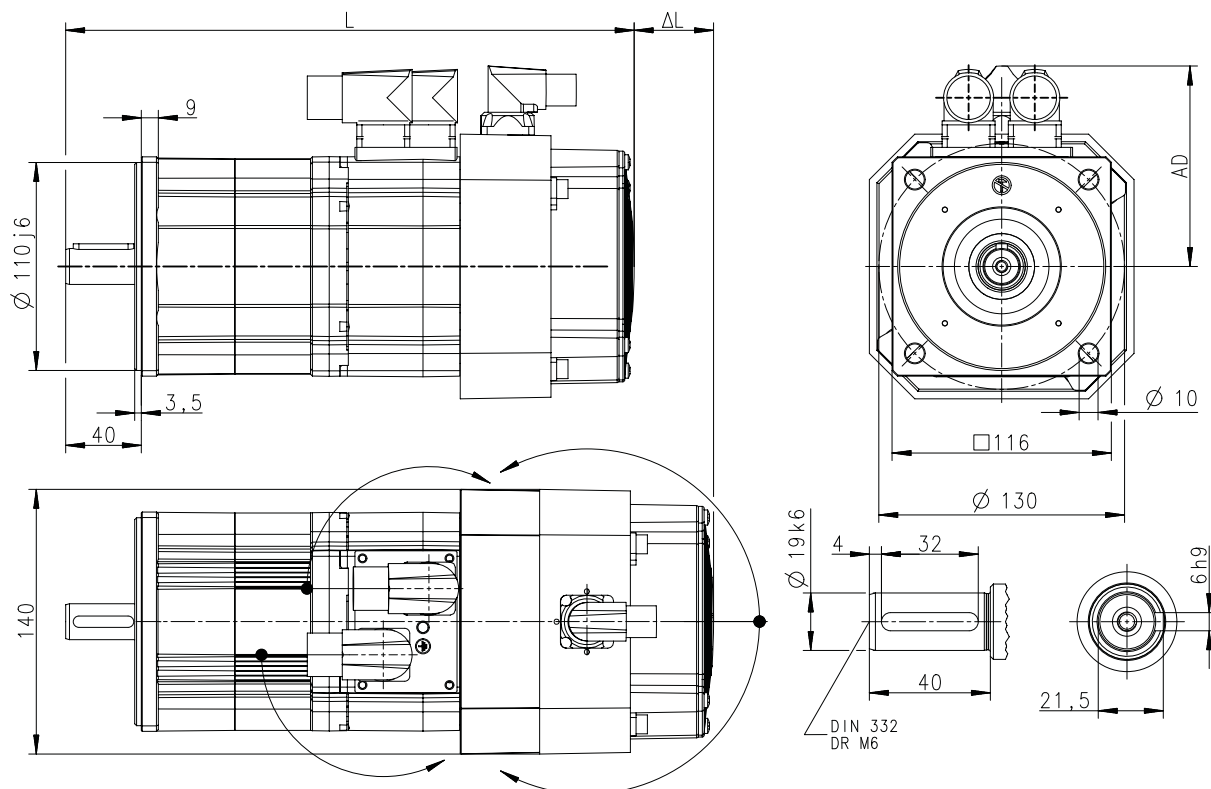

8800655-00

Motor			MCS 12D17-	MCS 12D35-	MCS 12H14-	MCS 12H34-	MCS 12L17-	MCS 12L39-
Total length without brake	L	mm	301		341		381	
Total length with brake	L	mm	321		361		401	
Motor/connection distance	AD	mm	105					

ΔL ▶ Additional lengths [106](#)


Technical data

Dimensions
Basic dimensions



MCS14, self-ventilated

Design B5-FF165

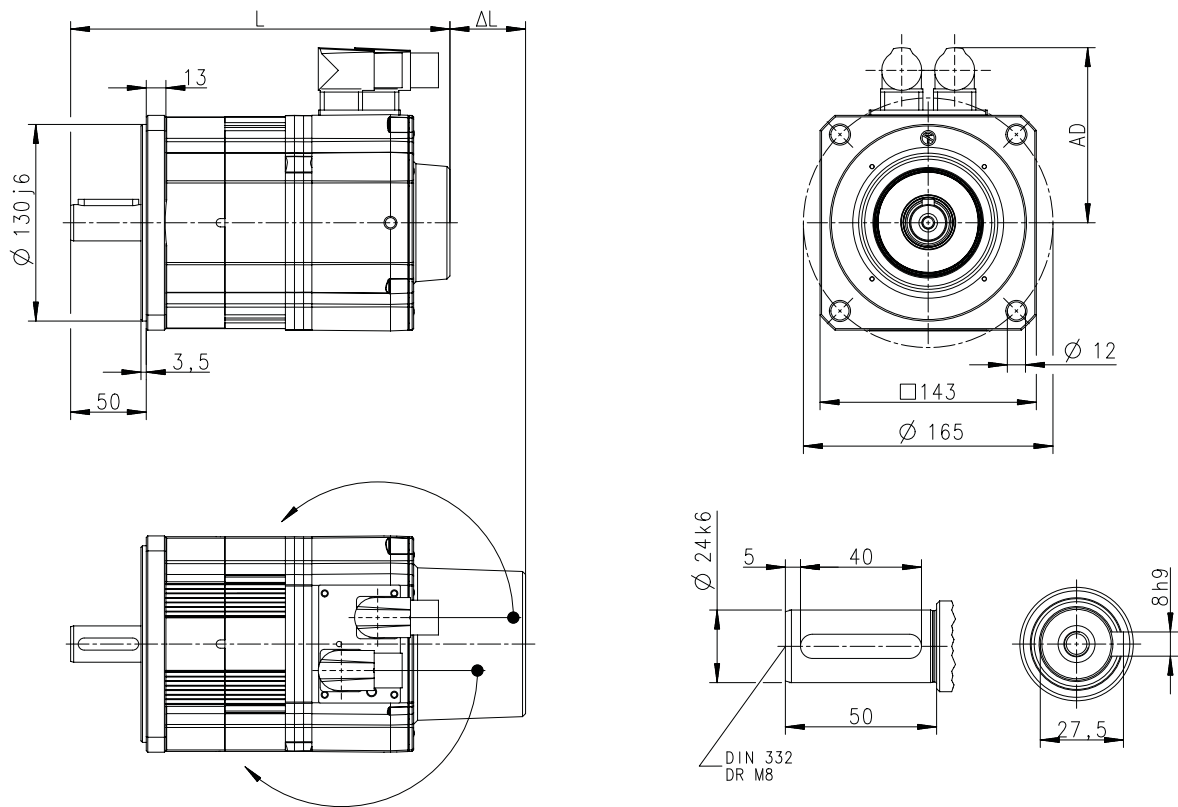

8800653-00

Motor			MCS 14D15-	MCS 14D36-	MCS 14H15-	MCS 14H32-	MCS 14L15-	MCS 14L32-
Total length without brake	L	mm	251		291		331	
Total length with brake	L	mm	279		319		359	
Motor/connection distance	AD	mm	117					146

Motor			MCS 14P14-			MCS 14P32-		
Total length without brake	L	mm	371			371		
Total length with brake	L	mm	399			399		
Motor/connection distance	AD	mm	117			146		

Δ L ▶ Additional lengths 106




Technical data

Dimensions
Basic dimensions

MCS14, forced ventilated

Design B5-FF165

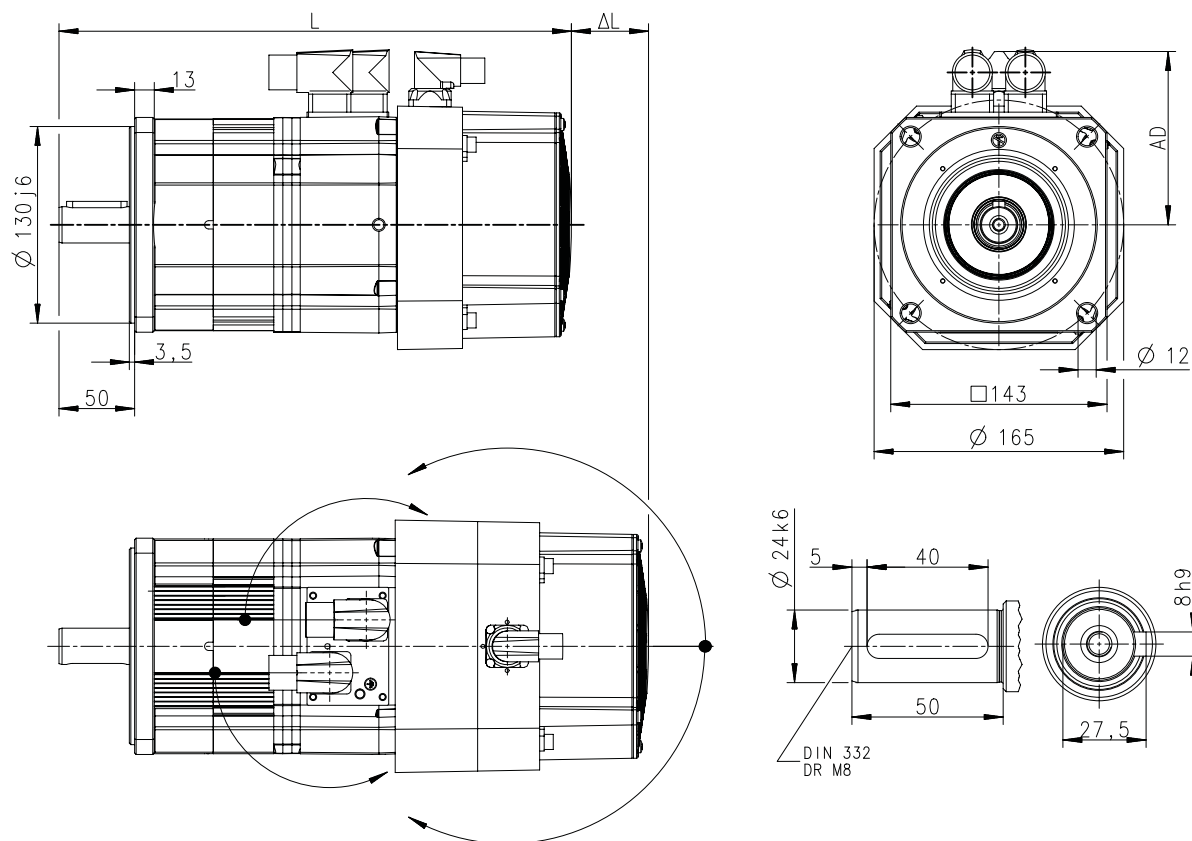

8800656-00

Motor			MCS 14D14-	MCS 14D30-	MCS 14H12-	MCS 14H28-	MCS 14L14-	MCS 14L30-
Total length without brake	L	mm	339		379		419	
Total length with brake	L	mm	367		407		447	
Motor/connection distance	AD	mm	117			146	117	146
Motor			MCS 14P11-			MCS 14P26-		
Total length without brake	L	mm	459			459		
Total length with brake	L	mm	487			487		
Motor/connection distance	AD	mm	117			146		

ΔL ▶ Additional lengths [106](#)


Technical data

Dimensions
Basic dimensions



MCS19, self-ventilated

Design B5-FF215

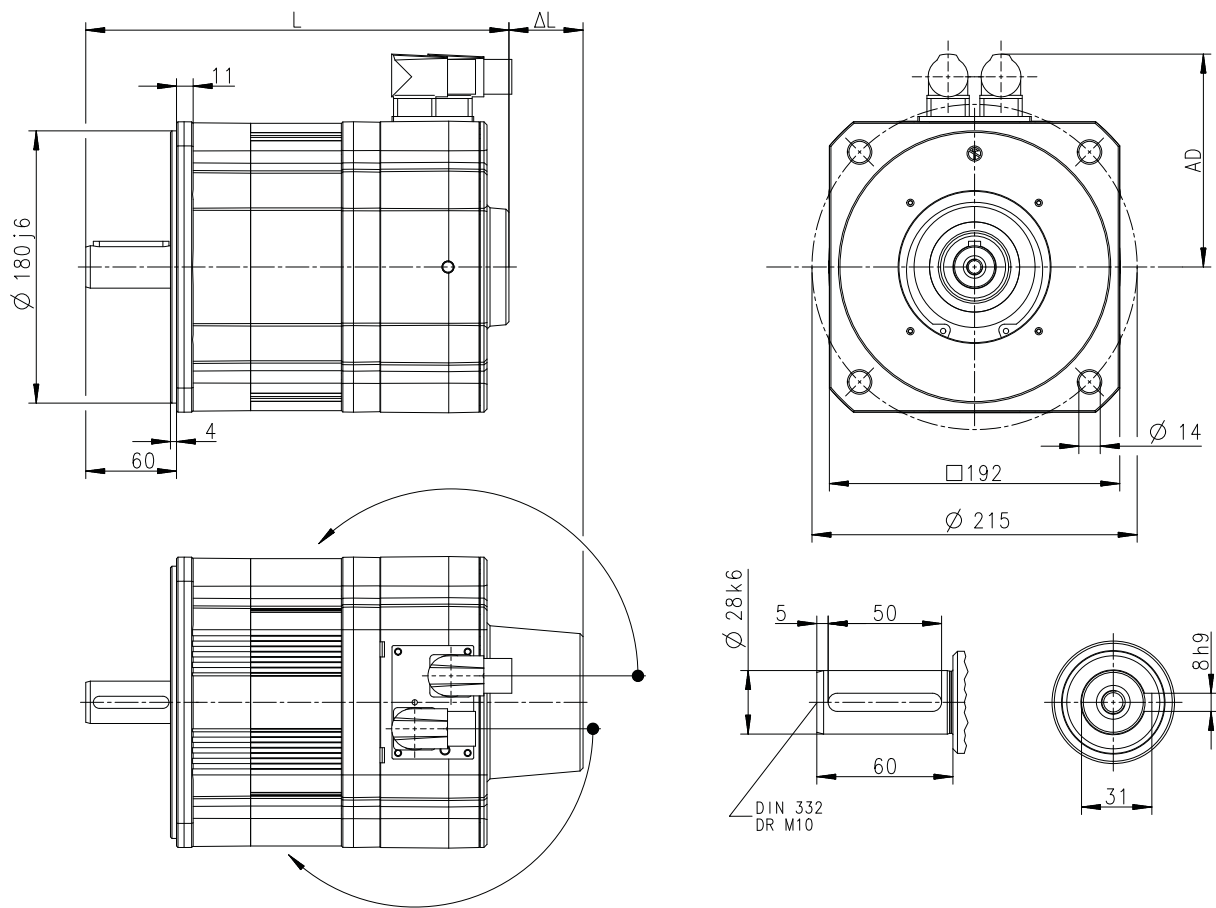

8800654-00

Motor			MCS 19F14-	MCS 19F30-	MCS 19J14-	MCS 19J30-	MCS 19P14-	MCS 19P30-
Total length without brake	L	mm	280		320		380	
Total length with brake	L	mm	324		364		424	
Motor/connection distance	AD	mm	142	171	142	171		

ΔL ▶ Additional lengths 106




Technical data

Dimensions
Basic dimensions

MCS19, forced ventilated

Design B5-FF215

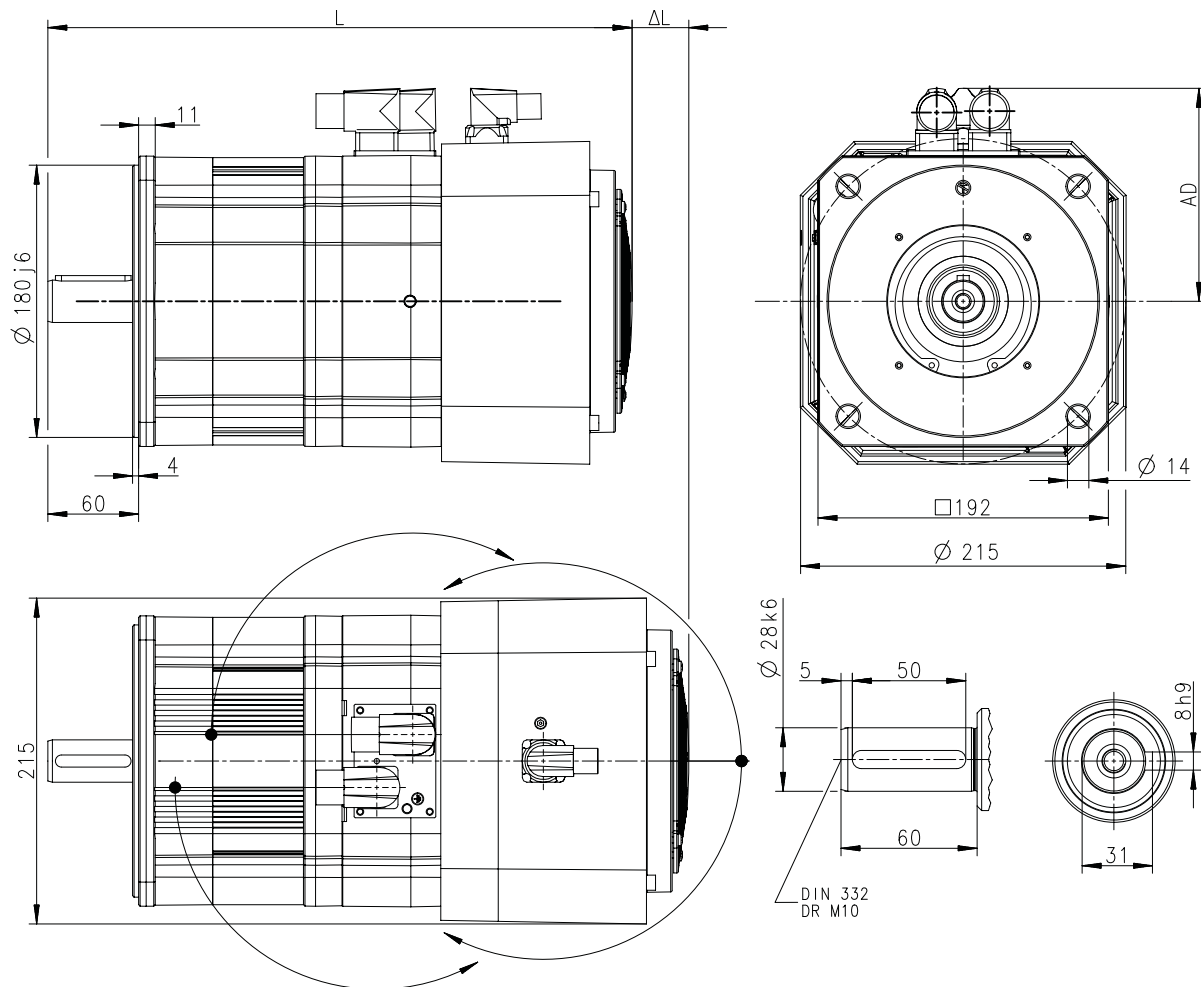

8800657-00

Motor			MCS 19F12-	MCS 19F29-	MCS 19J12-	MCS 19J29-	MCS 19P12-	MCS 19P29-
Total length without brake	L	mm	387		427		487	
Total length with brake	L	mm	431		471		531	
Motor/connection distance	AD	mm	142	171				

ΔL ▶ Additional lengths 106

Technical data

Dimensions
Additional lengths



Additional lengths



The motor code indicates the short designation of the brake and feedback.
Detailed information can be found for

► [Product codes](#) 132

► [Brakes](#) 121

► [Feedback](#) 125

MCS06

Motor			MCS06C41- MCS06C41L MCS06C60- MCS06C60L	MCS06F41- MCS06F41L MCS06F60- MCS06F60L	MCS06I41- MCS06I41L MCS06I60- MCS06I60L
Cooling type			natural	natural	natural
R□0	Δ L	mm	0		
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	82		
S□M (AM128...) / EKM	Δ L	mm	35		

MCS09

Motor			MCS09D41- MCS09D41L MCS09D60- MCS09D60L	MCS09F38- MCS09F38L MCS09F60- MCS09F60L	MCS09H41- MCS09H41L MCS09H60- MCS09H60L	MCS09L41- MCS09L41L MCS09L60-
Cooling type			natural	natural	natural	natural
R□0	Δ L	mm	0			
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	51			
S□M (AM128...) / EKM	Δ L	mm	20			

MCS12

Motor			MCS12D17-	MCS12D20- MCS12D20L	MCS12D35-	MCS12D41- MCS12D41L	MCS12H14-	MCS12H15- MCS12H15L	MCS12H30L
Cooling type			Forced	Natural	Forced	Natural	Forced	Natural	Natural
R□0	Δ L	mm	0	0	0	0	0	0	0
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	43	49	43	49	43	49	49
S□M (AM128...) / EKM	Δ L	mm	43	20	43	20	43	20	20

Motor			MCS12H34-	MCS12H35-	MCS12L17-	MCS12L20- MCS12L20L	MCS12L39-	MCS12L41- MCS12L41L
Cooling type			Forced	Natural	Forced	Natural	Forced	Natural
R□0	Δ L	mm	0	0	0	0	0	0
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	43	49	43	49	43	49
S□M (AM128...) / EKM	Δ L	mm	43	20	43	20	43	20



Technical data

Weights
Basic weights

MCS14

Motor			MCS14D14-	MCS14D15-	MCS14D30-	MCS14D36-	MCS14H12-	MCS14H15-	MCS14H28-	MCS14H32-
Cooling type			Blower	natural	Blower	natural	Blower	natural	Blower	natural
R□0	Δ L	mm	0	0	0	0	0	0	0	0
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	53	50	53	50	53	50	53	50
S□M (AM128...) / EKM	Δ L	mm	53	18	53	18	53	18	53	18

Motor			MCS14L14-	MCS14L15-	MCS14L30-	MCS14L32-	MCS14P11-	MCS14P14-	MCS14P26-	MCS14P32-
Cooling type			Blower	natural	Blower	natural	Blower	natural	Blower	natural
R□0	Δ L	mm	0	0	0	0	0	0	0	0
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	53	50	53	50	53	50	53	50
S□M (AM128...) / EKM	Δ L	mm	53	18	53	18	53	18	53	18

MCS19

Motor			MCS19F12-	MCS19F14-	MCS19F29-	MCS19F30-	MCS19J12-	MCS19J14-
Cooling type			Blower	natural	Blower	natural	Blower	natural
R□0	Δ L	mm	0	0	0	0	0	0
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	72	49	72	49	72	49
S□M (AM128...) / EKM	Δ L	mm	72	19	72	19	72	19

Motor			MCS19J29-	MCS19J30-	MCS19P12-	MCS19P14-	MCS19P29-	MCS19P30-
Cooling type			Blower	natural	Blower	natural	Blower	natural
R□0	Δ L	mm	0	0	0	0	0	0
S□M (AM1024...) / SRS / SVS / ECN / EQI / EQN	Δ L	mm	72	49	72	49	72	49
S□M (AM128...) / EKM	Δ L	mm	72	19	72	19	72	19

Weights

Basic weights



The basic weights are listed in the rated data.

► [Rated data](#) 28

Observe ► [Additional weights](#) 107!

Additional weights

Motors

Motor			MCS06C MCS06F MCS06I	MCS09D MCS09F MCS09H MCS09L	MCS12D MCS12H MCS12L	MCS14D MCS14H MCS14L MCS14P	MCS19F	MCS19J MCS19P
Permanent magnet holding brake								
Standard braking torque	m	kg	0.3	0.8	0.9	1.9	3.1	
Increased braking torque	m	kg		0.8	1.2	3.1		4.3

Product extensions

Motor connection
Connection via terminal box



Product extensions

Motor connection

Connection via terminal box


If a motor is to be connected to an existing cable or plug connectors are not to be used for other reasons, the connection can also be made via a terminal box.

The terminals are designed as tension spring terminals to ensure here the long-term vibration resistance of the cable contacts with adequate contact pressure required.

The terminal boxes have generously dimensioned space for the customer's own wiring and large surface shield connection areas to ensure a secure EMC-compliant connection. The cable outlet may be to the left or to the right, depending on requirements.



It is not possible to attach a terminal box to the MCS06 or to models with the blower.

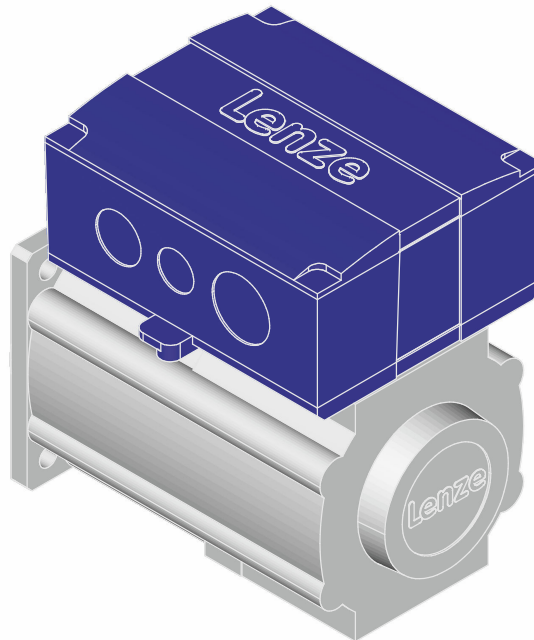




Product extensions

Motor connection
Connection via terminal box

Cable glands




The bore holes for the cable glands M25, M20 and M32 are located on both sides and closed. They can be opened according to need.

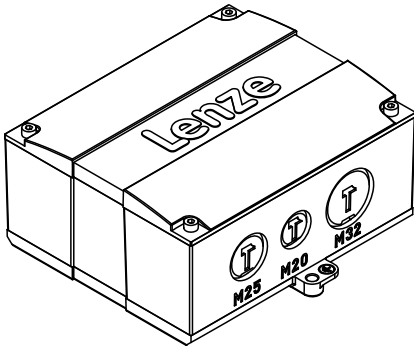

Motor		MCS09 MCS12 MCS14H	MCS14L15 MCS14P14 MCS19F15 MCS19J15	MCS14L32 MCS14P32 MCS19F13 MCS19J30 MCS19P
Screwed connections		2x M20 2x M25 2x M32		
cable cross-section	mm ²	0.08 ... 2.5 4 (without wire end ferrule)		0.2 ... 10
Stripping length	mm	10 ... 11		
Terminal design		Spring-loaded terminal		

Position of the connections

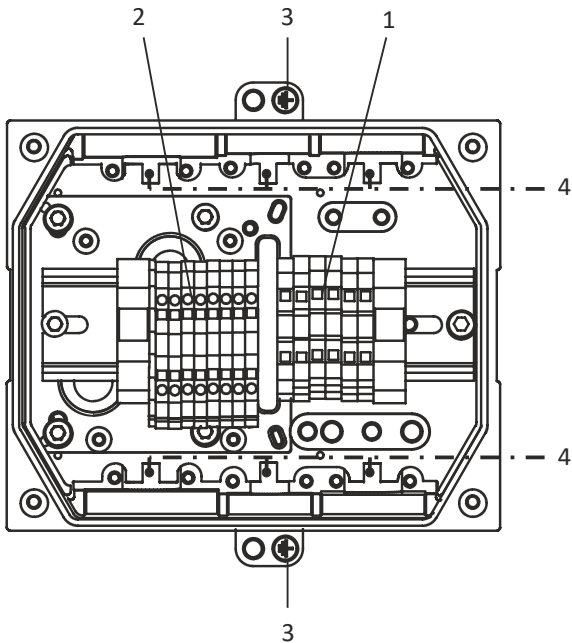

Position	Meaning
1	Power connection Brake connection
2	Feedback connection Connection of temperature monitoring
3	PE connection
4	Large area shield contact.

Product extensions

Motor connection
Connection via terminal box



Terminal box, power		
Contact	Name	Meaning
U1	L1	Motor winding phase
V1	L2	
W1	L3	
PE	PE	PE conductor

Terminal box, DC brake		
Contact	Name	Meaning
BD1	+	Brake +
BD2	-	Brake -

Terminal box, resolver		
Contact	Name	Meaning
B1	+Ref	Transformer windings (reference windings)
B2	-Ref	
B3	+VCC ETS	Supply: Electronic nameplate (only for variant with electronic nameplate ETS)
B4	+COS	Stator windings cosine
B5	-COS	
B6	+SIN	Stator windings sine
B7	-SIN	
B8		Not assigned

Terminal box, SinCos absolute value encoder with Hiperface		
Contact	Name	Meaning
B1	+ UB	Supply +
B2	GND	Mass
B3	A	Track A / + COS
B4	A ⁻	Track A inverse /-COS
B5	B	Track B / + SIN
B6	B ⁻	Track B inverse/-SIN
B7	Z	Zero track / + RS485
B8	Z ⁻	Zero track inverse /-RS485
B10		Incremental encoder shield

Terminal box, SinCos absolute value encoder with EnDat		
Contact	Name	Meaning
B1	+ UB	Supply +
B2	GND	Mass
B3	A	Track A / + COS
B4	A-	Track A inverse /-COS
B5	B	Track B / + SIN
B6	B-	Track B inverse/-SIN
B7	Daten	EnDat interface data
B8	Daten-	Data inverse EnDat interface
B20	Takt	EnDat interface cycle
B21	Takt-	Inverse EnDat interface cycle
B22	Up Sensor	Up Sensor
B23	0 V Sensor	0 V sensor
B24	Schirm	Encoder housing shield
B25		Not assigned


Terminal box, temperature monitoring		
Contact	Name	Meaning
R1	+	Temperature sensor +
R2	-	Temperature sensor -



Product extensions

Motor connection
Connection via terminal box

Terminal box dimensions

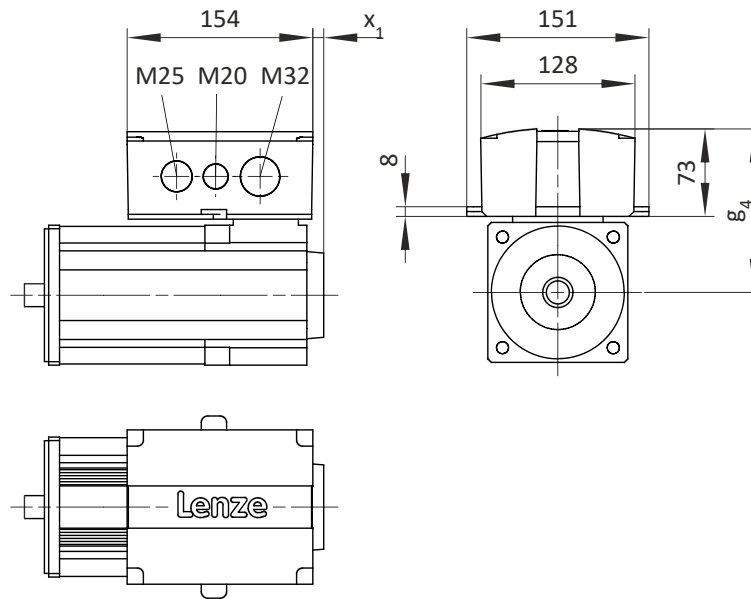

Motor			MCS								
			09D41-	09D41L	12D20-	12D20L	14D15-	14D36-	19F14	19F30	
			09F38-	09F38L	12D41-	12D41L	14H15-	14H32-	19J14	19J30	
			09H41-	09H41L	12H15-	12H15L	14L15-	14L32-	19P14	19P30	
			09L41-	09L41L	12H35-	12H30L	14P14-	14P32-			
					12L20-	12L20L					
					12L41-	12L41L					
Motor/connection distance		g ₄	mm	121		136		147		172	
Feedback											
Resolver/TTL incremental encoder		x ₁	mm	5		9		21		12	
SinCos absolute value encoder		x ₁	mm	56		58		71		61	

Product extensions

Motor connection
Connection via ICN connector



Connection via ICN connector

The electrical connection to the servo motors as a standard is established via ICN connectors.

The connection is made via two plug connectors, one for power and brake and one for feedback and temperature monitoring. Alternatively, Lenze offers One Cable Technology (OCT).

The connectors can be rotated by 270 ° and are provided with a bayonet catch. Since the catch of the connector is also compatible with conventional box nuts, existing mating connectors with a screw plug can continue to be used without any problems.




In order to provide for a quick and error-free connection of Lenze motors to Lenze inverters, we recommend using prefabricated Lenze system cables.

One Cable Technology (OCT)

With the aid of the open motor feedback protocol HIPERFACE DSL® and the digital absolute value encoder AM20-8V-D, the motor supports the future-oriented One Cable Technology (OCT).

Advantages

- All necessary wiring is done in only one connector.
- The use of hybrid cables allows for combined servo and feedback cables.
- This intelligently minimizes connecting cables, cable variants, and connection costs.
- The motor temperature is transmitted digitally together with the encoder signal. An additional connection for a motor temperature sensor is not required.

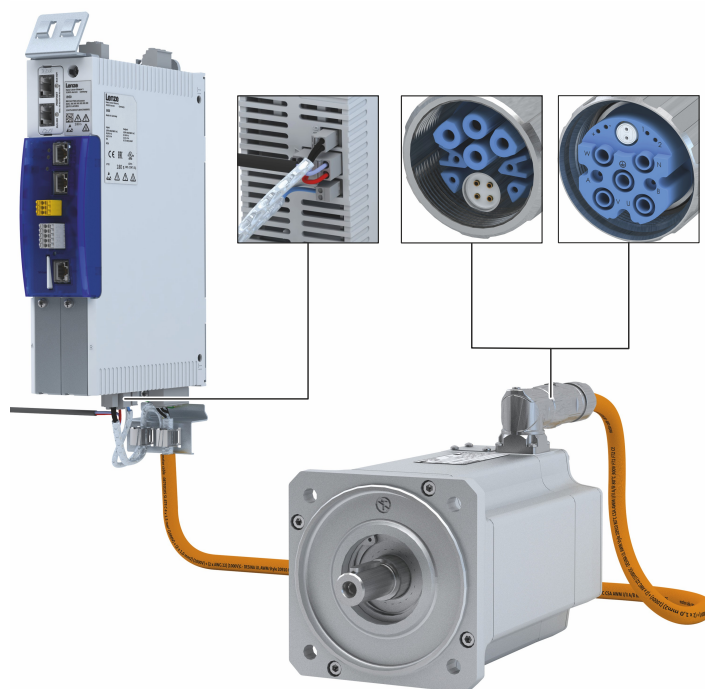




Product extensions


Motor connection
Connection via ICN connector

Position of the connections

Standard connection

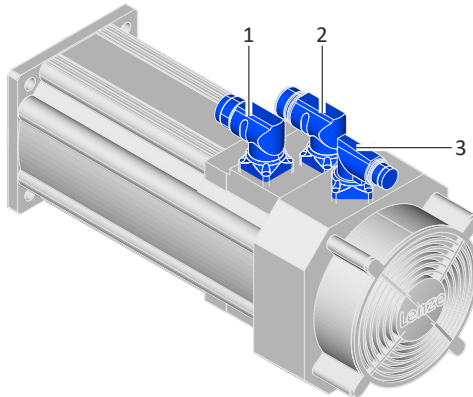

One Cable Technology (OCT)

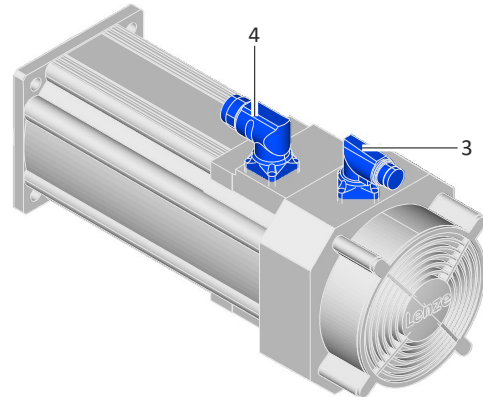

Position	Meaning	Position	Meaning
1	ICN-M23 connector, 6-pole ICN-M40 connector, 8-pole <ul style="list-style-type: none"> Power connection Brake connection PE connection 	4	For One Cable Technology (OCT) ICN-M23 connector, hybrid ICN-M40 connector, hybrid <ul style="list-style-type: none"> Power connection Brake connection PE connection Connection of digital absolute value encoder Connection of temperature monitoring
2	ICN-M23 connector <ul style="list-style-type: none"> Feedback connection Connection of temperature monitoring 		
3	ICN-M17 connector <ul style="list-style-type: none"> Blower connection 		

Motor/ICN connector assignment

Standard connection: Power and brake

One Cable Technology (OCT): Power connection, brake, feedback and temperature monitoring

Motor	Connector	Motor	Connector	Motor	Connector	Motor	Connector
MCS06...	ICN-M23	MCS14H15-	ICN-M23	MCS14P14-	ICN-M23	MCS19J14-	ICN-M23
MCS09...	ICN-M23	MCS14H28-	ICN-M40	MCS14P26-	ICN-M40	MCS19J29-	ICN-M40
MCS12...	ICN-M23	MCS14H32-	ICN-M23	MCS14P32-	ICN-M40	MCS19J30-	ICN-M40
MCS14D14-	ICN-M23	MCS14L14-	ICN-M23	MCS19F12-	ICN-M23	MCS19P12-	ICN-M40
MCS14D15-	ICN-M23	MCS14L15-	ICN-M23	MCS19F14-	ICN-M23	MCS19P14-	ICN-M40
MCS14D30-	ICN-M23	MCS14L30-	ICN-M40	MCS19F29-	ICN-M40	MCS19P29-	ICN-M40
MCS14D36-	ICN-M23	MCS14L32-	ICN-M40	MCS19F30-	ICN-M40	MCS19P30-	ICN-M40
MCS14H12-	ICN-M23	MCS14P11-	ICN-M23	MCS19J12-	ICN-M40		

Product extensions

Motor connection
Connection via ICN connector




Standard connection

Connection of power and brake

ICN-M23 connector assignment


6-pole



ICN M23 6-pole		
Contact	Name	Meaning
PE	PE	PE conductor
1	BD1	Holding brake DC +/-AC
2	BD2	Holding brake DC -/AC
4	U	Power phase U
5	V	Power phase V
6	W	Power phase W

ICN-M40 connector assignment

8-pole



ICN M40 8-pole		
Contact	Name	Meaning
U	U	Power phase U
+	BD1	Holding brake +
-	BD2	Holding brake -
W	W	Power phase W
V	V	Power phase V
PE	PE	PE conductor
1		Not assigned
2		Not assigned




Product extensions

Motor connection
Connection via ICN connector

Feedback and temperature monitoring connection

ICN-M23 connector assignment


Resolver



ICN M23 for resolvers		
Contact	Name	Meaning
1	+Ref	Transformer windings
2	-Ref	Transformer windings
3	+VCC ETS	Supply: Electronic nameplate (Only for motors and inverters that support this function)
4	+COS	Stator windings cosine
5	-COS	Stator windings cosine
6	+SIN	Stator windings sine
7	-SIN	Stator windings sine
8		Not assigned
9		Not assigned
10	Schirm	Encoder housing shield
11	+	Temperature monitoring: PT1000
12	-	Temperature monitoring: PT1000

ICN-M23 connector assignment

Incremental and SinCos absolute value encoder Hiperface©



ICN M23 for incremental and SinCos absolute value encoder Hiperface		
Contact	Name	Meaning
1	B	Track B / + SIN
2	A ⁻	Track A inverse /-COS
3	A	Track A / + COS
4	+UB	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse /-RS485
7	Z	Zero track / + RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10	Schirm	Encoder housing shield
11	+	Temperature monitoring: PT1000
12	-	Temperature monitoring: PT1000


Product extensions

Motor connection
Connection via ICN connector



ICN-M23 connector assignment


SinCos absolute value encoder with EnDat interface



ICN M23 SinCos absolute value encoder with EnDat		
Contact	Name	Meaning
1	UP Sensor	Up Sensor
2		Not assigned
3		Not assigned
4	0 V Sensor	0 V sensor
5	+	PT1000/KTY temperature sensor
6	-	PT1000/KTY temperature sensor
7	+UB	Supply +
8	Takt	EnDat interface cycle
9	Takt-	Inverse EnDat interface cycle
10	GND	Mass
11	Schirm	Encoder housing shield
12	B	Track B
13	B-	Track B inverse/-SIN
14	Daten	EnDat interface data
15	A	Track A
16	A-	Track A inverse /-COS
17	Daten-	Data inverse EnDat interface

Blower

Pin assignment ICN-M17



ICN M17 for blowers 1-ph		
Contact	Name	Meaning
PE	PE	PE conductor
1	U1	Fan
2	U2	Fan
3		Not assigned
4		Not assigned
5		Not assigned
6		Not assigned



Product extensions

Motor connection
Connection via ICN connector

Connector assignment

NOTICE

When making your selection, the motor data and permissible currents of the cables according to the system cable system manual must be observed.

Power terminal connectors

Plug		ICN-M23 6-pole	ICN-M40 8-pole
Motor cable	mm ²	1.0/1.5/2.5	2.5/4.0
Screw plug			
Order code		EWS0001	EWS0012
Coding in the system cable type code		M01	M02
Bayonet lock			
Order code		EWS1001	EWS1012
Coding in the system cable type code		M04	M05

Feedback connectors

Feedback	Resolver	Incremental and SinCos absolute value encoder Hiperface	SinCos absolute value encoder with EnDat interface
Plug	ICN-M23	ICN-M23	ICN-M23
Screw plug			
Order code	EWS0006	EWS0010	EWS0017
Coding in the system cable type code	F01	F02	F03
Bayonet catch			
Order code	EWS1006	EWS1010	EWS1017
Coding in the system cable type code	F05	F06	F07

Connector for blower

Blower	1-phase
Plug	ICN-M17
Screw plug	
Order code	EWS0021
Coding in the system cable type code	L02
Bayonet catch	
Order code	EWS1021
Coding in the system cable type code	L04

Product extensions

Motor connection
Connection via ICN connector




One Cable Technology (OCT)

Connection of power, brake, feedback and temperature monitoring

ICN-M23 connector assignment, hybrid

For One Cable Technology (OCT) with digital absolute value encoder

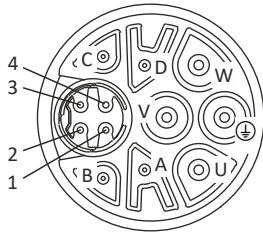

ICN M23 Hybrid for One Cable Technology (OCT) with digital absolute value encoder		
Contact	Name	Meaning
U	U	Power phase U
V	V	Power phase V
W	W	Power phase W
PE	PE	PE
A	BD1	Holding brake +
B	BD2	Holding brake -
C	+	Optional temperature monitoring: PTC +
D	-	Optional temperature monitoring: PTC -
1		Not assigned
2	+	VCC/data +
3	-	GND/data -
4		Not assigned




Product extensions

Motor connection
Connection via ICN connector

ICN-M40 connector assignment, hybrid

For One Cable Technology (OCT) with digital absolute value encoder



ICN M40 Hybrid for One Cable Technology (OCT) with digital absolute value encoder		
Contact	Name	Meaning
U	U	Power phase U
V	V	Power phase V
W	W	Power phase W
A	BD1	Holding brake +
B	BD2	Holding brake -
PE	PE	PE
N		Not assigned
DSL1	+	VCC/data +
DSL2	-	GND/data -
+		Not assigned
-		Not assigned
1	+	Optional temperature monitoring: PTC +
2	-	Optional temperature monitoring: PTC -

Product extensions

Motor connection
Connection via ICN connector



Hybrid cables for One Cable Technology (OCT)

Connector with bayonet lock	ICN-M23 Hybrid
Order code for hybrid cable 1.5 mm ²	
Cable length 2.0 m	EYP0080A0020M11A00
Cable length 3.5 m	EYP0080A0035M11A00
Cable length 5.0 m	EYP0080A0050M11A00
Cable length 7.5 m	EYP0080A0075M11A00
Cable length 10 m	EYP0080A0100M11A00
Cable length 15 m	EYP0080A0150M11A00
Cable length 20 m	EYP0080A0200M11A00
Cable length 50 m	EYP0080A0500M11A00
Cable length 100 m	EYP0080A1000M11A00
Order code for hybrid cable 2.5 mm ²	
Cable length 2.0 m	EYP0081A0020M11A00
Cable length 3.5 m	EYP0081A0035M11A00
Cable length 5.0 m	EYP0081A0050M11A00
Cable length 7.5 m	EYP0081A0075M11A00
Cable length 10 m	EYP0081A0100M11A00
Cable length 15 m	EYP0081A0150M11A00
Cable length 20 m	EYP0081A0200M11A00
Connector with bayonet lock	ICN-M40 Hybrid
Order code for hybrid cable 4.0 mm ²	
Cable length 2.0 m	EYP0085A0020M12A00
Cable length 3.5 m	EYP0085A0035M12A00
Cable length 5.0 m	EYP0085A0050M12A00
Cable length 7.5 m	EYP0085A0075M12A00
Cable length 10 m	EYP0085A0100M12A00
Cable length 15 m	EYP0085A0150M12A00
Cable length 20 m	EYP0085A0200M12A00
Cable length 50 m	EYP0085A0500M12A00
Cable length 100 m	EYP0085A1000M12A00
Order code for hybrid cable 6.0 mm ²	
Cable length 2.0 m	EYP0086A0020M12A00
Cable length 3.5 m	EYP0086A0035M12A00
Cable length 5.0 m	EYP0086A0050M12A00
Cable length 7.5 m	EYP0086A0075M12A00
Cable length 10 m	EYP0086A0100M12A00
Cable length 15 m	EYP0086A0150M12A00
Cable length 20 m	EYP0086A0200M12A00
Cable length 50 m	EYP0086A0500M12A00
Cable length 100 m	EYP0086A1000M12A00



Brakes

Optionally, the motors can be ordered with a permanent magnet brake as holding brake.

⚠ CAUTION!

They may not be used as safety elements (particularly with hoist axes) without additional measures being implemented.

The brakes used are not fail-safe brakes in the sense that prospective disruptive factors, e.g. oil ingress, can lead to a reduction in torque!

- ▶ The brakes must only be used as holding brakes for holding the axes at a standstill or in the deenergised state.
- ▶ The brake must not be used as a service brake.

⚠ CAUTION!

If no suitable voltage (incorrect value, incorrect polarity) is applied to the brake, the brake will be applied and can be overheated and destroyed by the motor continuing to rotate.

Motor supply cables

If long motor supply cables are used, pay attention to the ohmic voltage drop along the cable and compensate for it with a higher voltage at the input end of the cable.

The following applies to Lenze system cables:

$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \times [m]} \times I_{Lg}[m] \times I_B[A]$	U	V	Resulting supply voltage
	U _B	V	Rated voltage of the brake
	I _{Lg}	m	Cable length
	I _B	A	Rated current of the brake

NOTICE

- ▶ The brakes become active when the supply voltage has been switched off (closed-circuit principle).
- ▶ When using the brakes purely as holding brakes, virtually no wear occurs on the friction surfaces.
- ▶ The friction surfaces must always be free from oil and grease because even small amounts of grease or oil will considerably reduce the braking torque.

NOTICE

In case of these permanent magnet brakes, the rated torque applies solely as holding torque at standstill.

- ▶ Emergency stops at higher speeds are possible but high switching energy increases wear on the friction surfaces and the hub.
- ▶ During braking from full motor speed, e.g. in the event of emergency stops, the braking torque is significantly reduced.



NOTICE

In case of travel axes, the compliance of the permissible ratio of mass inertia load/brake motor (J_L/J_{MB}) ensures that the permissible maximum switching energy of the brake will not be exceeded and at least the values given for the emergency stop functions from the given speed (see rated data) are applied.

For hoist axes, the load torque resulting from the weight acts additionally. In this case, the specifications for (J_L/J_{MB}) do not apply.

To simplify matters, the friction energy per switching cycle can be calculated using the formula below and must not exceed the limit value for emergency stops, which depends on the switching rate:

$Q = \frac{1}{2} \times J_{ges} \times \left(2\pi \times \frac{\Delta n}{60} \right)^2 \times \frac{M_N}{M_N - M_L}$	Q	J	Friction energy
	J_{total}	kgm ²	Total mass inertia (motor + load)
	Δn	rpm	Differential speed
	M_N	Nm	Rated torque of the brake
	M_L	nM	Load torque



The shortest operating times of the brakes are achieved by DC switching of the voltage and an external suppressor circuit (varistor or spark suppressor).

Without suppressor circuit, the operating times may increase. A varistor/ spark suppressor limits the breaking voltage peaks. It must be ensured that the power limit of the suppressor circuit is not exceeded. This limit depends on the brake current, brake voltage, disengagement time and the switching operations per time unit.

Furthermore the suppressor circuit is necessary for interference suppression and for increasing the service life of the relay contacts (external, is not integrated into the motor).



It is not possible to readjust the brake.



Product extensions

Brakes
Permanent magnet brakes

Permanent magnet brakes

Rated data

NOTICE

Engagement and disengagement times apply to rated voltage ($\pm 0\%$) and suppressor circuit of the brakes with a varistor with DC switching. Without a suppressor circuit, the times may be longer.

The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

Requirements with regard to the DC 24 V brake: smoothed DC voltage, ripple $\leq 1\%$.

Maximum switching energy per emergency stop with $n = 3000$ rpm for at least 2000 emergency stops.

Standard braking torque

Supply voltage DC 24 V

Motor			MCS06C	MCS06F	MCS06I	MCS09D	MCS09F	MCS09H	MCS09L	MCS12D	MCS12H
Supply voltage range	V _{in}	V	21.84 ... 25.2								
Supply voltage	V _{rated}	V	24								
Bemessungsdrehmoment											
At 20 °C	M _{rated}	Nm	2.2			8			12		
At 120 °C	M _{rated}	Nm	2			6			10		
Rated current	I _{rated}	A	0.34			0.67					
Engagement time t1	t ₁	ms	15			20			13		
Disengagement time t2	t ₂	ms	30			40			43		
Friction energy	Q _E	kJ	0.030			0.400					
Weight	m	kg	0.30			0.80			0.9		
Massenträgheitsmoment											
Brake	J	kgcm ²	0.12			1.07					
Brake motor	J _{MB}	kgcm ²	0.26	0.34	0.42	2.17	2.57	2.97	3.87	5.07	8.4
Load/brake motor ratio	J _L /J _{MB}		22.1	16.6	13.3	36.4	30.5	26.3	19.9	15	8.7

Motor			MCS12L	MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
Supply voltage range	V _{in}	V	21.84 ... 25.2							
Supply voltage	V _{rated}	V	24							
Bemessungsdrehmoment										
At 20 °C	M _{rated}	Nm	12	22				37	95	
At 120 °C	M _{rated}	Nm	10	18				32	80	
Rated current	I _{rated}	A	0.67	0.75				0.81	1.46	
Engagement time t1	t ₁	ms	13	15				96	23	
Disengagement time t2	t ₂	ms	43	150				113	140	
Friction energy	Q _E	kJ	0.400	0.640				2.350	2.80	
Weight	m	kg	0.9	1.9				3.1	3.9	
Massenträgheitsmoment										
Brake	J	kgcm ²	1.07	3.2				12.4	31.8	
Brake motor	J _{MB}	kgcm ²	11.7	11.3	17.4	26.6	37.9	77	135	190
Load/brake motor ratio	J _L /J _{MB}		5.9	10.5	6.5	3.9	2.4	5.2	2.2	1.2

Motor code			P1								
------------	--	--	----	--	--	--	--	--	--	--	--

Product extensions

Brakes
Permanent magnet brakes



Increased braking torque

Supply voltage DC 24 V

Motor			MCS09D	MCS09F	MCS09H	MCS09L	MCS12D	MCS12H	MCS12L	MCS14D	MCS14H
Supply voltage range	V _{in}	V	21.84 ... 25.2								
Supply voltage	V _{rated}	V	24								
Bemessungsdrehmoment											
At 20 °C	M _{rated}	Nm	12				24			37	
At 120 °C	M _{rated}	Nm	10				19			32	
Rated current	I _{rated}	A	0.67				0.75			0.81	
Engagement time t1	t ₁	ms	13				16			96	
Disengagement time t2	t ₂	ms	43				90			113	
Friction energy	Q _E	kJ	0.400				0.890			2.350	
Weight	m	kg	0.9				1.20			3.1	
Massenträgheitsmoment											
Brake	J	kgcm ²	1.07				3.13			12.4	
Brake motor	J _{MB}	kgcm ²	2.17	2.57	2.97	3.87	7.1	10.4	13.7	20.5	26.6
Load/brake motor ratio	J _L /J _{MB}		36.4	30.5	26.3	19.9	24.3	16.3	12.1	22.2	16.9

Motor			MCS14L				MCS14P				
Supply voltage range	V _{in}	V	21.84 ... 25.2								
Supply voltage	V _{rated}	V	24								
Bemessungsdrehmoment											
At 20 °C	M _{rated}	Nm	37								
At 120 °C	M _{rated}	Nm	32								
Rated current	I _{rated}	A	0.81								
Engagement time t1	t ₁	ms	96								
Disengagement time t2	t ₂	ms	113								
Friction energy	Q _E	kJ	2.350								
Weight	m	kg	3.1								
Massenträgheitsmoment											
Brake	J	kgcm ²	12.4								
Brake motor	J _{MB}	kgcm ²	35.8				47.1				
Load/brake motor ratio	J _L /J _{MB}		12.3				9.1				

Motor code			P2								
------------	--	--	----	--	--	--	--	--	--	--	--



Feedback

For speed control with a servo inverter, the servo motor can be equipped with the following feedback systems:

Inverter	Feedback without functional safety		
	Resolver	Absolute value encoder	Digital absolute value encoder for OCT
i950 servo inverter	RS0	AM128-8V-H AM1024-8V-H AS1024-8V-H	AM20-8V-D
i700 servo inverter	RS0	AM128-8V-H AM1024-8V-H AS1024-8V-H	-
8400 TopLine inverter drives	RS0	AM128-8V-H AM1024-8V-H AS1024-8V-H	-
9400 HighLine servo drives	RS0	AM32-5V-E AM128-8V-H AM1024-8V-H AM2048-5V-E AS1024-8V-H AS2048-5V-E	-

Inverter	Feedback with functional safety		
	Resolver	Absolute value encoder	Digital absolute value encoder for OCT
i950 servo inverter	RV03	AM128-8V-K2 AM1024-8V-K2 AS1024-8V-K2	AM20-8V-D2
9400 HighLine servo drives	RV03	AM128-8V-K2 AM1024-8V-K2 AS1024-8V-K2	-

Feedbacks in the environment of functional safety

Motors can perform speed-dependent safety functions for safe speed and/or safe relative position monitoring in a drive system by Lenze inverters or Controllers. In case of inverters, these functions are implemented by integrable safety modules and in case of Controllers by the additionally required Safety Controller.

When planning systems/installations of this kind, always observe the following:

- When using just one single feedback system in the environment of these safety applications, the applicable safety engineering standard IEC 61800-5-2 (adjustable speed electrical power drive systems - Part: 5-2: Safety requirements - Functional) stipulates special requirements for the connection between feedback system and motor shaft.
- This is due to the fact that two-channel safety systems at this point in the mechanical system are actually designed as single-channel systems. If this mechanical connection is designed with considerable overdimensioning, the standard permits exclusion of the fault "encoder-shaft breakage" or "encoder-shaft slip". As such, the permissible angular acceleration limit values must not be exceeded for the individual drive solutions.

You can find the limit values in the corresponding feedback data of the individual motor ranges.

Product extensions

Feedback
Resolver



Speed-dependent safety functions

Examples of speed-dependent safety functions:

- Safe stop 1 (SS1)
- Safe operational stop (SOS)
- Safely limited speed (SLS)
- Safe maximum speed (SMS)
- Safe direction (SDI)
- Operation mode selector (OMS) with confirmation (ES)
- Safe speed monitor (SSM)
- Safely limited increment (SLI)

Resolver

The stator-supplied, 2-pole resolver with two stator windings shifted by 90 degrees and a rotor winding with a transformer winding can record both the speed and the rotor position, just like a single-turn absolute value encoder. The rotor position can be determined within one mechanical motor revolution after a voltage failure.

Feedback type			Resolver	
Feedback			RS0	RV03
Speed-dependent safety functions			No	Yes
Design			Mounting	
Resolution - angle		'	0.8	0.8
Min. accuracy		'	-10	-10
Max. accuracy		'	10	10
Absolute positioning			1 revolution	1 revolution
Max. speed	n_{\max}	rpm	8000	8000
Max. DC input voltage	$V_{\text{in,max}}$	V	10	10
Max. input frequency	$f_{\text{in,max}}$	kHz	4	4
Ratio stator/rotor			0.3	0.3
Min ratio tolerance		%	-5	-5
Max ratio tolerance		%	5	5
Rotor impedance	Z_{ro}	Ω	51+j90	51+j90
Stator impedance	Z_{so}	Ω	102+j150	102+j150
Impedance	Z_{rs}	Ω	44+j76	44+j76
Min. insulation resistance at DC 500 V	R_{min}	M Ω	10	10
Number of pole pairs			1	1
Max. angle error Min		'	-10	-10
Max. angle error Max		'	10	10

Speed-dependent safety functions

Feedback			RV03
Motor code			RV03
Max. permissible angular acceleration			
MCS06	α	rad/s ²	56000
MCS09 ... MCS19	α	rad/s ²	19000
Functional safety			
IEC 61508			SIL3
EN 13849-1			Up to Performance Level e



Product extensions

Feedback
Absolute value encoder

Absolute value encoder

Absolute value encoders can detect the speed, the rotor position, and the machine position with a very high resolution. They are used for the positioning of dynamic applications and do not require homing.



With the aid of the open feedback protocol HIPERFACE DSL[®] and in connection with the digital absolute value encoder AM20-8V-D, the motor supports the future-oriented One Cable Technology (OCT).

Product extensions

Feedback
Absolute value encoder



Feedback type			Digital absolute value encoder		SinCos absolute value encoder			
Feedback			AM20-8V-D	AM20-8V-D2	AM32-5V-E	AM128-8V-H	AM128-8V-K2	AM1024-8V-H
Speed-dependent safety functions			No	Yes	No	No	Yes	No
Design			Mounting	Mounting	Mounting	Mounting	Mounting	Mounting
Encoder type			Multi-turn	Multi-turn	Multi-turn	Multi-turn	Multi-turn	Multi-turn
Resolution		bit	20	20	-	-	-	-
Pulses			-	-	32	128	128	1024
Output signals			Digital	Digital	SinCos 1 Vss	SinCos 1 Vss	SinCos 1 Vss	SinCos 1 Vss
Interfaces			Hiperface	Hiperface	EnDat	Hiperface	Hiperface	Hiperface
Absolute revolution			4096	4096	4096	4096	4096	4096
Resolution - angle			0.02	0.02	0.4	0.4	0.4	0.4
Min. accuracy		'	-	-	-5	-1.3	-1.3	-0.8
Max. accuracy		'	-	-	5	1.3	1.3	0.8
Fehlergrenze Positionswert								
System accuracy			1.7	1.7	-	-	-	-
Integral nonlinearity			1	1	-	-	-	-
Min. DC input voltage	$V_{in,min}$	V	-	-	4.75	7	7	7
Max. DC input voltage	$V_{in,max}$	V	-	-	5.25	12	12	12
Max. current consumption	I_{max}	A	0.15	0.15	0.17	0.06	0.06	0.08
Limit frequency	f_{max}	kHz	-	-	600	200	200	200

Feedback type			SinCos absolute value encoder				
Feedback			AM1024-8V-K2	AM2048-5V-E	AS1024-8V-H	AS1024-8V-K2	AS2048-5V-E
Speed-dependent safety functions			Yes	No	No	Yes	No
Design			Mounting	Mounting	Mounting	Mounting	Mounting
Encoder type			Multi-turn	Multi-turn	Single-turn	Single-turn	Single-turn
Resolution		bit	-	-	-	-	-
Pulses			1024	2048	1024	1024	2048
Output signals			SinCos 1 Vss	SinCos 1 Vss	SinCos 1 Vss	SinCos 1 Vss	SinCos 1 Vss
Interfaces			Hiperface	EnDat	Hiperface	Hiperface	EnDat
Absolute revolution			4096	4096	1	1	1
Resolution - angle			0.4	0.4	0.4	0.4	0.4
Min. accuracy		'	-0.8	-0.6	-0.8	-0.8	-0.6
Max. accuracy		'	0.8	0.6	0.8	0.8	0.6
Fehlergrenze Positionswert							
System accuracy			-	-	-	-	-
Integral nonlinearity			-	-	-	-	-
Min. DC input voltage	$V_{in,min}$	V	7	4.75	7	7	4.75
Max. DC input voltage	$V_{in,max}$	V	12	5.25	12	12	5.25
Max. current consumption	I_{max}	A	0.08	0.25	0.08	0.08	0.15
Limit frequency	f_{max}	kHz	200	200	200	200	200



Product extensions

Blower
Absolute value encoder

Speed-dependent safety functions

Feedback			AM20-8V-D2	AM128-8V-K2	AM1024-8V-K2	AS1024-8V-K2
Motor code			EVM	SVM	SVM	SVS
Max. permissible angular acceleration						
MCS06	α	rad/s ²	240000	970000		
MCS09 ... MCS19	α	rad/s ²	240000	240000		
Functional safety						
IEC 61508			SIL2			
EN 13849-1			Up to Performance Level d			

Blower

The forced ventilation motors are cooled as a standard by means of a separate axial fan.

Rated data 50 Hz

Motor series			MCS					
Size			12		14		19	
Degree of protection			IP54					
Number of phases			1	1	1	1	1	1
Rated voltage	V _{rated}	V	115	230	115	230	115	230
Rated power	P _{rated}	kW	0.018	0.019	0.042	0.05	0.055	0.055
Rated current	I _{rated}	A	0.22	0.12	0.56	0.3	0.5	0.25

Rated data 60 Hz

Motor series			MCS					
Size			12		14		19	
Degree of protection			IP54					
Number of phases			1	1	1	1	1	1
Rated voltage	V _{rated}	V	115	230	115	230	115	230
Rated power	P _{rated}	kW	0.018	0.019	0.044	0.044	0.07	0.065
Rated current	I _{rated}	A	0.22	0.12	0.56	0.25	0.61	0.29

Product extensions

Temperature monitoring
Thermal detectors PT1000



Temperature monitoring

Thermal detectors PT1000

The thermal detector used continuously monitors the motor temperature. The temperature information is transferred to the inverter using the system cable of the feedback system. **This is not a full motor protection!**


This makes it possible to determine the motor temperature in the permissible operating range with great accuracy.

MCS06

In case of this motor, the winding temperature of a winding phase is monitored with a thermal sensor PT1000.



When supplying the thermal sensors with a measurement current of 1 mA, the connection between the temperature and the resistance measured applies.

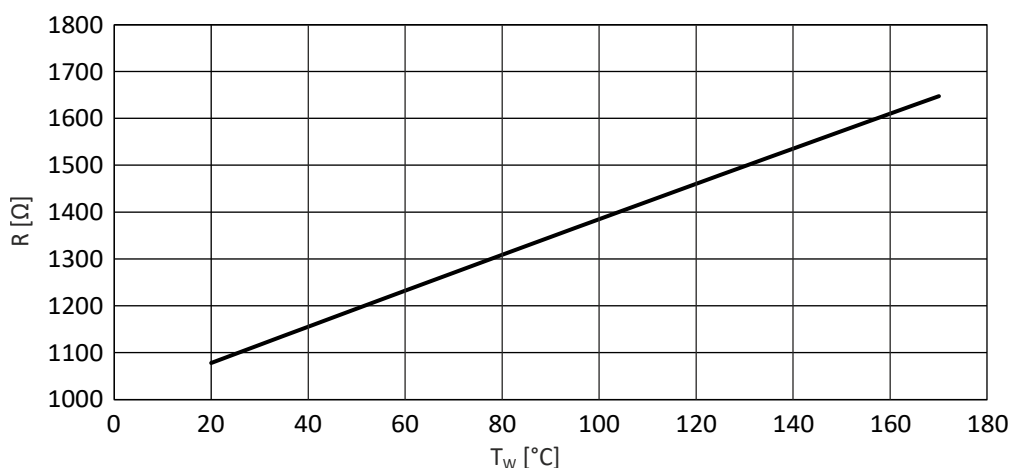

R Resistance
 T_w Winding temperature

MCS09 ... 19

These motors are monitored via three thermal sensors connected in series (1x PT1000 + 2x PTC 150 °C). This makes it possible to determine the motor temperature in the permissible operating range and at the same time execute the overtemperature response configured in the controller in one of the winding strands.



The three thermal sensors connected in series are identified on the nameplate by the short designation "PT1k+2PTC".




Product extensions

Temperature monitoring
Thermal detectors PT1000



When supplying the thermal sensors with a measurement current of 1 mA, the connection between the temperature and the resistance measured applies.

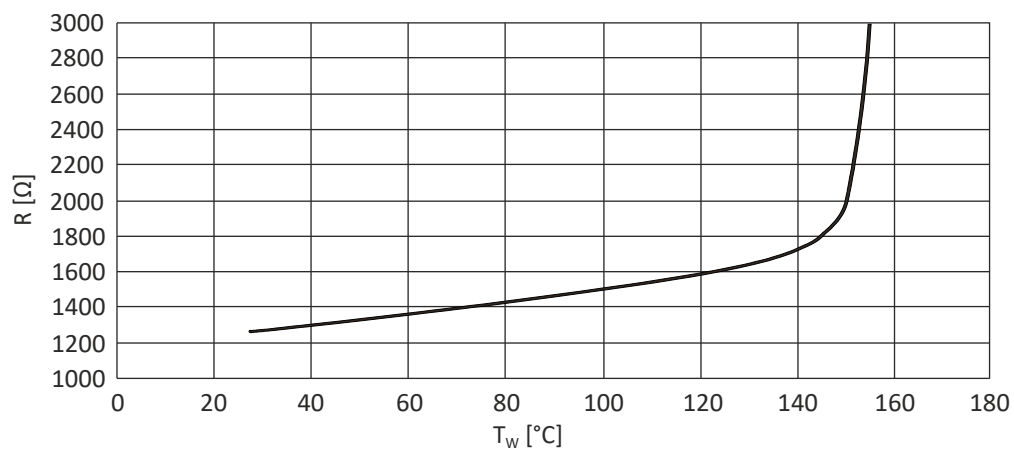

R Resistance
 T_w Winding temperature



Product codes

Product code of MCS synchronous servo motor

Example		M	C	S	06	C	41	-	RS0	B0
Meaning	Variant	Product code								
Product family	Motor	M								
Type	Compact servo motors		C							
Version	Synchronous			S						
Motor frame size	Square dimension 62 mm				06					
	Square dimension 89 mm				09					
	Square dimension 116 mm				12					
	Square dimension 142 mm				14					
	Square dimension 192 mm				19					
Overall length						C ... P				
Rated speed	rpm x 100						11 ... 60			
Inverter mains connection	3 x 230 V							L		
	3 x 400 V							-		
Feedback	SinCos absolute value encoder, single-turn, EnDat AS2048-5V-E									ECN
	Digital absolute value encoder, multi-turn, Hiperface DSL® AM20-8V-D									EKM
	SinCos absolute value encoder, multi-turn, EnDat AM32-5V-E									EQI
	SinCos absolute value encoder, multi-turn, EnDat AM2048-5V-E									EQN
	Digital safety absolute value encoder, multi-turn, Hiperface DSL® AM20-8V-D2									EVM
	Resolver p=1									RS0
	Safety resolver, p=1 RV03									RVO
	SinCos absolute value encoder, multi-turn, HiperfaceDSL® AM128-8V-H									SKM
	SinCos absolute value encoder, multi-turn, Hiperface® AM1024-8V-H									SRM
	SinCos absolute value encoder, single-turn, Hiperface® AS1024-8V-H									SRS
	SinCos safety absolute value encoder, multi-turn, Hiperface® AM128-8V-K2									SVM
	SinCos safety absolute value encoder, multi-turn, Hiperface® AM1024-8V-K2									SVM
	SinCos safety absolute value encoder, single-turn, Hiperface® AS1024-8V-K2									SVS
Brake	Without brake									B0
	Permanent magnet brake DC 24V									P1
	Permanent magnet brake DC 24V, reinforced									P2



Environmental notes and recycling

Lenze has been certified to the worldwide DIN EN ISO 14001 environmental management standard for many years. As part of our environmental policy and the associated climate responsibility, please note the following information on hazardous ingredients and the recycling of Lenze products and their packaging:



Lenze products are partly subject to the EU Directive 2011/65/EU on the restriction of certain hazardous substances in electrical and electronic equipment (RoHS). This is documented accordingly in the EU declaration of conformity and with the CE mark.



Lenze products are not subject to EU Directive 2012/19/EU on waste electrical and electronic equipment (WEEE), but some contain batteries/rechargeable batteries in accordance with EU Directive 2006/66/EC (Battery Directive). The disposal route, which is separate from household waste, is indicated by corresponding labels with the "crossed-out trash can".

Any batteries/rechargeable batteries included are designed to last the life of the product and do not need to be replaced or otherwise removed by the end user.



Lenze products are usually sold with cardboard or plastic packaging. This packaging complies with EU Directive 94/62/EC on packaging and packaging waste (Packaging Directive). The required disposal route is indicated by material-specific labels with the "recycling triangle".

Example: "21 - other cardboard"



Lenze products are subject to the European Regulation EC No. 1907/2006 (REACH Chemicals Regulation). When used as intended, exposure of substances to humans, animals and the environment is excluded.

Lenze products are industrial electrical and electronic products and are disposed of professionally. Both the mechanical and electrical components such as electric motors, gearboxes or inverters contain valuable raw materials that can be recycled and reused. Proper recycling and thus maintaining the highest possible level of recyclability is therefore important and sensible from an economic and ecological point of view.

- Coordinate professional disposal with your waste disposal company.
- Separate mechanical and electrical components, packaging, hazardous waste (e.g. gear oils) and batteries/rechargeable batteries wherever possible.
- Dispose of the separated waste in an environmentally sound and proper manner (no household waste or municipal bulky waste).

What?	Material	Disposal instructions
Pallets	Wood	Return to manufacturers, freight forwarders or reusable materials collection system
Packaging material	Paper, cardboard, pasteboard, plastics	Collect and dispose of separately
Products		
Electronic devices	Metal, plastics, circuit boards, heatsinks	As electronic waste give to professional disposer for recycling
Gearbox	Oil	Drain oil and dispose of separately
	Casting, steel, aluminium	Dispose as metal scrap
Motors	Casting, copper, rotors, magnets, potting compound	As engine scrap give to professional disposer for recycling
Dry-cell batteries/rechargeable batteries		As used batteries give to professional disposer for recycling



Further information on Lenze's environmental and climate responsibility and on the topic of energy efficiency can be found on the Internet:

www.Lenze.com → search word: "Sustainability"



Appendix

Good to know

Approvals and directives

CCC	China Compulsory Certification documents the compliance with the legal product safety requirements of the PR of China - in accordance with Guobiao standards.
cCSA _{US}	CSA certificate, tested according to US and Canada standards
UE	Union Européenne documents the declaration of the manufacturer that EU Directives are complied with.
CEL	China Energy Label documents the compliance with the legal energy efficiency requirements for motors, tested according to the PR of China and Guobiao standards
CSA	CSA Group (Canadian Standards Association) CSA certificate, tested according to Canada standards
UL ^{Energy} _{US CA}	Energy Verified Certificate Determining the energy efficiency according to CSA C390 for products within the scope of energy efficiency requirements in the USA and Canada
cUL _{US}	UL certificate for products, tested according to US and Canada standards
cUR _{US}	UL certificate for components, tested according to US and Canada standards
EAC	Customs union Russia / Belarus / Kazakhstan certificate documents the declaration of the manufacturer that the specifications for the Eurasian conformity (EAC) required for placing electronic and electromechanical products on the market of the entire territory of the Customs Union (Russia, Belarus, Kazakhstan, Armenia and Kyrgyzstan) are complied with.
UL	Underwriters Laboratory Listed Product
UL _{LISTED}	UL Listing approval mark as proof that the product has been tested and the applicable safety requirements have been confirmed by UL (Underwriters Laboratory).
UR	UL Recognized Component approval mark as proof that the UL approved component can be used in a product or system bearing the UL Listing approval mark.



Operating modes of the motor

Operating modes S1 ... S10 as specified by EN 60034-1 describe the basic stress of an electrical machine.

In continuous operation a motor reaches its permissible temperature limit if it outputs the rated power dimensioned for continuous operation. However, if the motor is only subjected to load for a short time, the power output by the motor may be greater without the motor reaching its permissible temperature limit. This behaviour is referred to as overload capacity.

Depending on the duration of the load and the resulting temperature rise, the required motor can be selected reduced by the overload capacity.

The most important operating modes

Continuous operation S1	Short-time operation S2
<p>Operation with a constant load until the motor reaches the thermal steady state. The motor may be actuated continuously with its rated power.</p>	<p>Operation with constant load; however, the motor does not reach the thermal steady state. During the following standstill, the motor winding cools down to the ambient temperature again. The increase in power depends on the load duration.</p>
Intermittent operation S3	Non-intermittent periodic operation S6
<p>Sequence of identical duty cycles comprising operation with a constant load and subsequent standstill. Start-up and braking processes do not have an impact on the winding temperature. The steady-state is not reached. The guide values apply to a cycle duration of 10 minutes. The power increase depends on the cycle duration and on the load period/downtime ratio.</p>	<p>Sequence of identical duty cycles comprising operation with a constant load and subsequent no-load operation. The motor cools down during the no-load phase. Start-up and braking processes do not have an impact on the winding temperature. The steady-state is not reached. The guide values apply to a cycle duration of 10 minutes. The power increase depends on the cycle duration and on the load period/idle time ratio.</p>

P Power
t Time
 t_L Idle time
 θ Temperature

P_V Power loss
 t_B Load period
 t_S Cycle duration

Appendix

Good to know
Enclosures



Enclosures

The degree of protection indicates the suitability of a motor for specific ambient conditions with regard to humidity as well as the protection against contact and the ingress of foreign particles. The degrees of protection are classified by EN 60529.

The first code number after the code letters IP indicates the protection against the ingress of foreign particles and dust. The second code number refers to the protection against the ingress of humidity.

Code number 1	Degree of protection	Code number 2	Degree of protection
0	No protection	0	No protection
1	Protection against the ingress of foreign particles $d > 50$ mm. No protection in case of deliberate access.	1	Protection against vertically dripping water (dripping water).
2	Protection against medium-sized foreign particles, $d > 12$ mm, keeping away fingers or the like.	2	Protection against diagonally falling water (dripping water), 15° compared to normal service position.
3	Protection against small foreign particles $d > 2.5$ mm. Keeping away tools, wires or the like.	3	Protection against spraying water, up to 60° from vertical.
4	Protection against granular foreign particles, $d > 1$ mm, keeping away tools, wire or the like.	4	Protection against spraying water from all directions.
5	Protection against dust deposits (dust-protected), complete protection against contact.	5	Protection against water jets from all directions.
6	Protection against the ingress of dust (dust-proof), complete protection against contact.	6	Protection against choppy seas or heavy water jets (flood protection).

