

KENDRION

INTORQ

POWERED BY KENDRION



Spring-applied brake BFK457

Compact and easily fitted

0.12 - 125 Nm

www.intorq.com

PRECISION. SAFETY. MOTION.

INTORQ has been part of the Industrial Brakes business unit at KENDRION since the beginning of 2020. Our product portfolio includes PERMANENT MAGNET BRAKES and SPRING-APPLIED BRAKES, CLUTCHES and ELECTRONIC ACCESSORIES for a wide range of applications.

We are the brake experts: both, off-the-shelf products and customer-specific solutions are part of our expertise. With over one century of experience, our strong technical team develops the optimal solution for you. What is important to us? We do not only want to meet the requirements of our customers, we want to exceed them. With our products, which stand for QUALITY, EFFICIENCY and INNOVATION, we make the world a little bit safer!



INTORQ quality worldwide

We manufacture our products with the same processes and the same quality at all INTORQ sites. The basis for this is provided by our international production network. We can react flexibly in production thanks to our versatile assembly structure.

INTORQ test laboratory

The main focus in our development work is on the quality and safety of our brakes. Our products are thoroughly tested, and function-relevant values are continuously documented. In Germany, we have the honour of being one of only three firms worldwide that are allowed to carry out online tests on behalf of the TÜV-SÜD/Deutschland inspection agency.

INTORQ logistics certified

Our approval as a “Known Consignor” carries the number DE/KC/0898-01. Our freight consignments now do not have to be checked at airports, so they can be delivered more quickly and more cost-effectively.

INTORQ is an AEO

An AEO is an authorised economic operator in the European Union who has been checked by the Customs Office and consequently enjoys certain privileges (simplified customs procedures, preferential treatment etc.). The AEO programme is recognised by numerous other countries (for example, the USA and China).

BFK457 – compact and easily fitted

Often, the brake is only required to perform its basic function. The BFK457 is ideal for these situations. The speed of fitting with integral fixing screws and fixed air gap make this spring-applied brake even more attractive.

Thanks to the quality standards which we apply to research and development, production and assembly, the INTORQ BFK457 spring-applied brakes meet the highest demands. These electromagnetically released spring-applied brakes can be used wherever rapid deceleration of moving masses or controlled holding of masses is required.

Since the braking force comes from pressure springs, the braking torque, which is generated by friction, is available when no current is applied – even in the event of a mains failure. The brake is released electromagnetically.

Applications

- General engineering
- Engine construction
- Vehicles for the disabled
- Automation technology
- Sport and recreation
- Rotary indexing technology
- Industrial trucks
- Hoists
- Materials handling technology
- Wood working machines



Materials handling technology



Industrial trucks



Hoists

Sizes and properties

Sizes 01/02/03/04/05

- Braking torques: 0.12–4 Nm
- Compact: Fully assembled with rotor and flange
- Can be mounted on both sides
- Hand release available as an option

Sizes 06/08/10/12/14/16


- Braking torques: 4–125 Nm
- Emergency Hand release
- Designs:
 - Compact: Fully assembled with rotor and flange
 - Basic: Stator complete with rotor
- Hand release available as an option

Properties for all sizes

- Standard voltages 24 V DC and 205 V DC (other voltages on request)
- Temperature class F (155 °C)
- Compact design with flange – for small overall dimensions
- Easy assembly by means of integrated fixing screws
- No fixed bearing is required on the brake

INTORQ 155-1

 E318895

 Only for sizes 06 – 16
 C US



Compact, sizes 01 and 02



Compact, sizes 03, 04, 05



Compact, sizes 06 – 16



Basic, sizes 06 – 16



Hand release available as an option



Noise-reduced as a double spring-applied brake <50dB(A)

Contents

Product information	4
List of abbreviations	5
Technical data	
Sizes 01 and 02	6
Sizes 03 – 05	7
Sizes 06 – 16 Compact	8
Sizes 06 – 16 Basic	10
Sizes 06 – 16 low-noise design.....	12
Overview	14


List of abbreviations

P_N	[W]	Rated coil power at rated voltage and 20°C	S_{hue}	[1/h]	transitional operating frequency, thermal rating of the brake/clutch
U_N	[V DC]	Rated coil voltage	S_{hmax}	[1/h]	Maximum permissible operating frequency, depending on the friction work per operation
M_K	[Nm]	Rated torque of the brake at a relative speed of 100 r/min	SLN	[mm]	Rated air gap
M_{dyn}	[Nm]	dynamic brake torque, measured at constant speed of rotation	SHL	[mm]	Hand-release air gap, setting dimension of hand-release
M_L	[Nm]	Load torque, torque that the static load produces at the motor shaft	t₁	[s]	Engagement time, the total of the reaction delay and torque rise time $t_1 = t_{11} + t_{12}$
Δn₀	[r/min]	Initial relative speed of the brake	t₂	[s]	Disengagement time, time from switching the stator until the torque has reduced to 0.1 M _K
J_L	[kgm ²]	moment of inertia of the load, referred to referred to the output shaft (load shaft)	t₃	[s]	Slipping time to standstill (after t ₁₁)
Q	[J]	Heat/energy	t₁₁	[s]	Delay time when connecting, time from disconnecting the voltage until the torque begins to rise
Q_E	[J]	Maximum permissible friction work per switching cycle, thermal rating of the brake	t₁₂	[s]	Rise time of braking torque, time from beginning of rise of torque until braking torque is reached
Q_{smax}	[J]	maximum permissible friction work during cyclic switching, depending on the operating frequency			
S_h	[1/h]	Operating frequency, the number of repeated operations per unit time			


Spring-applied brake BFK457-01...05

Sizes 01 and 02


(Size 02 also available with hand release)

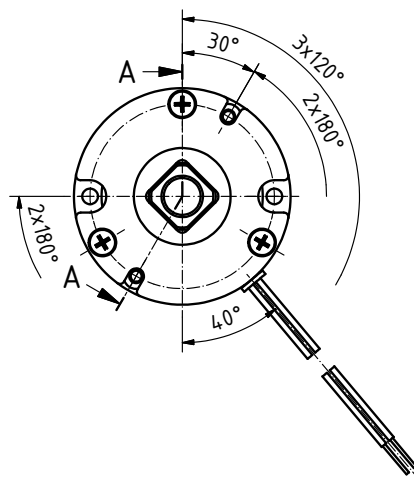

Mounted on flange

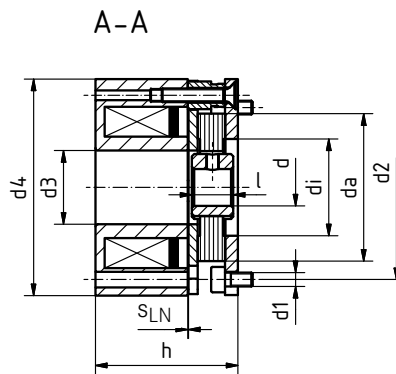

Mounted on stator



Size	M_K [Nm]	M_{Kmax} [Nm]	$P_N^{(1)}$ [W]	$dH7^{(3)}$	d1	d2	d3	d4	da	di	h	l	$sLN^{(5)}$	$sL_{max} \text{ at } M_K$	$sL_{max} \text{ at } M_{Kmax}$	m [kg]
01	0,12	0,24	5	5 ⁽²⁾ / 6 ⁽²⁾	2xM2,5	32	13,5	37	25	18	31,3	9	0,1+0,08/-0,05	0,35	0,23	0,2
02	0,25	0,5	6,6	6 ⁽²⁾ / 7 ⁽²⁾ / 8 ⁽²⁾	2xM3	40	16	47	32	21	31	12	0,1+0,08/-0,05	0,35	0,23	0,25
03	0,5	1,0	9	6/7/8/9/10	3xM3	48	19	56	38,5	30	31,8	15	0,15 ±0,1	0,4	0,3	0,4
04	1	2,0	11,5	6/7/8/9/10	3xM3	58	24	65	47,5	35	33,8	15	0,15 ±0,1	0,4	0,3	0,55
05	2	4,0	13	8/10/11/12/15 ⁽⁴⁾	3xM4	66	28	75	55	40	35,9	15	0,15 ±0,1	0,4	0,3	0,8

⁽¹⁾ Power of coil at 20°C in watt, aberration up to +10% according to the chosen connection voltage possible

⁽²⁾ Without keyway

⁽³⁾ Standard keyway in accordance with DIN 6885/1-P9

⁽⁴⁾ $\varnothing 15\text{mm}$, keyway in accordance with DIN 6885/3-P9

⁽⁵⁾ Minimum air gap, the actual value is determined by the sum tolerances of the individual components

M_K : Rated torque of the brake in Nm, based on $\Delta n = 100 \text{ r/min}$

Caution! The braking torque depends on the speed

M_{Kmax} : Holding brake with emergency stop

Standard voltages: 24 V DC and 205 V DC, other voltages on request

Standard keyway according to DIN 6885/1-P9

Length of connecting cable: 400 mm




All dimensions in mm

Sizes 03 to 05

(also available with hand release)

Mounted on flange


Mounted on stator

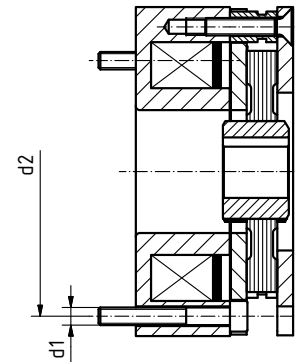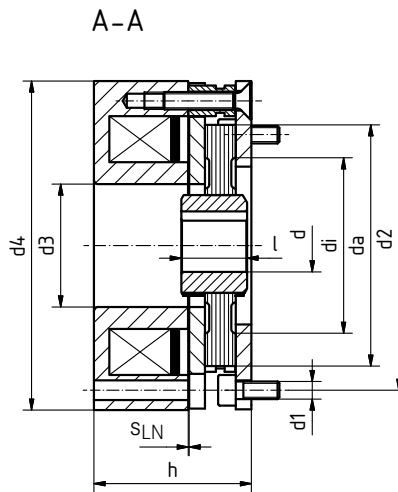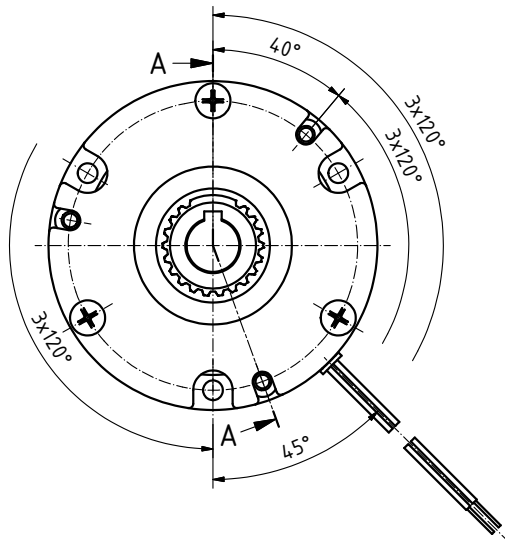

Size	M_K [Nm]	Max. speed n_{max} [r/min]	Max. permissible friction work per switching cycle Q_E [J]	Transition operating frequency S_{hue} [1/h]	Operating times [ms] with standard rated torque and s_{LN} DC switching				Moment of inertia of rotor [kgcm ²]
					t_{11}	t_{12}	t_1	Release t_2	
01	0.12	5000	200	160	2	9	11	17	0.00254
02	0.25	5000	400	125	3	5	8	17	0.01
03	0.5	5000	800	100	5	7.5	12.5	18	0.021
04	1	5000	1200	90	9	9	18	23	0.058
05	2	5000	1800	80	10	16	26	35	0.105

Spring-applied brake BFK457-06... 16


Compact design, fully assembled with rotor and flange

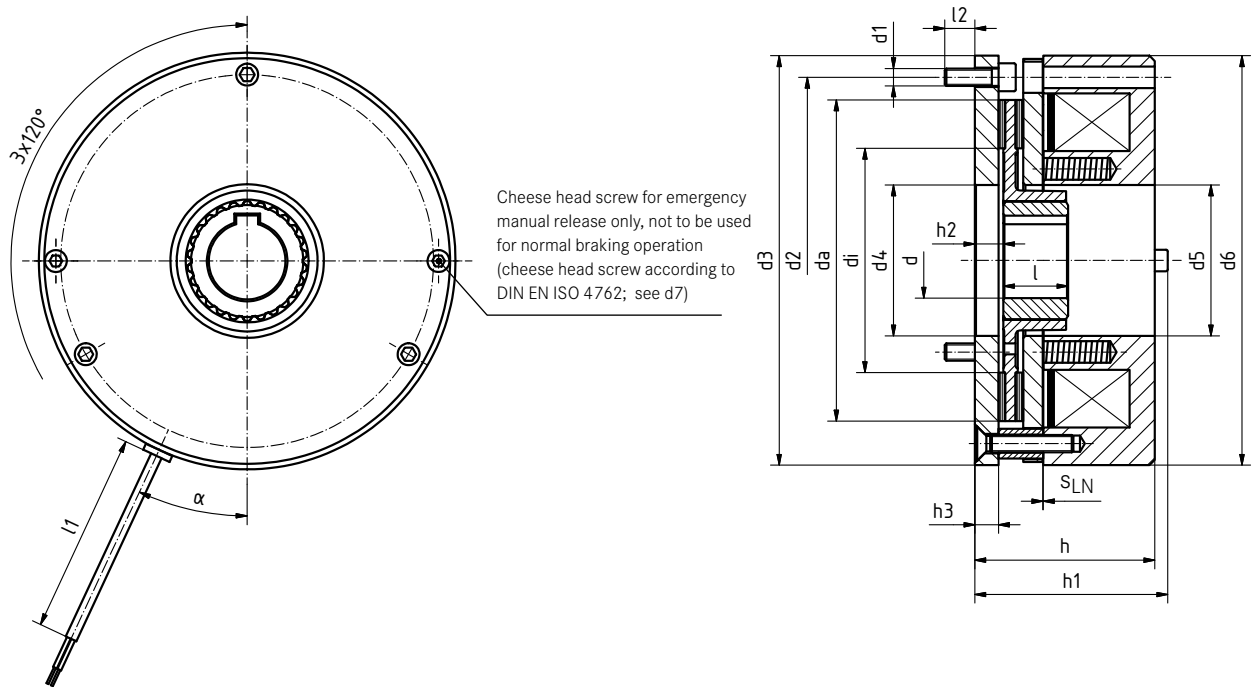

Size	M_K [Nm]	M_{Kmax} [Nm]	$P_N^{(1)}$ [W]	b	dI7 spec. (2)	dH7 standard (3)	d1	d2	d3	d4	d5	d6	d7	d11	da	di
06	4	6	20	90	10	11/12/14/15	3xM4	72	84	31	31	84	M4x30	8	60	40
08	8	12	25	108	10	11/12/14/15/20	3xM5	90	102	42	41.5	102	M5x35	8	77	56
10	16	23	30	137	10	15/20	3xM6	112	130	44	44	130	M5x40	10	95	66
12	32	46	40	157	14	20/25	3XM6	132	150	52	52	150	M5x45	10	115	70
14	60	95	50	174	14	20/25/30	3XM8	145	165	55	60	165	M6x55	12	124	80
16	80	125	55	203	15	25/30/35/38 ⁽⁴⁾	3xM8	170	190	70	70	190	M6x60	12	149	104

Size	M_K	Max. speed n_{max}	Max. permissible friction work per switching cycle Q_E	Transition operating frequency S_{hue}	Operating times [ms] with standard rated torque and s_{LN} Nenn DC switching				Moment of inertia of rotor
	[Nm]	[r/min]	[J]	[h ⁻¹]	t_{11}	t_{12}	t_1	Release t_2	[kgcm ²]
06	4	6000	3000	79	29	19	48	37	0.13
08	8	5000	7500	50	60	35	95	42	0.45
10	16	4000	12000	40	35	60	95	100	2.00
12	32	3600	24000	30	45	53	98	135	4.50
14	60	3600	30000	28	50	57	107	240	6.30
16	80	3600	36000	27	71	50	121	275	15.00

Compact design, with hand release

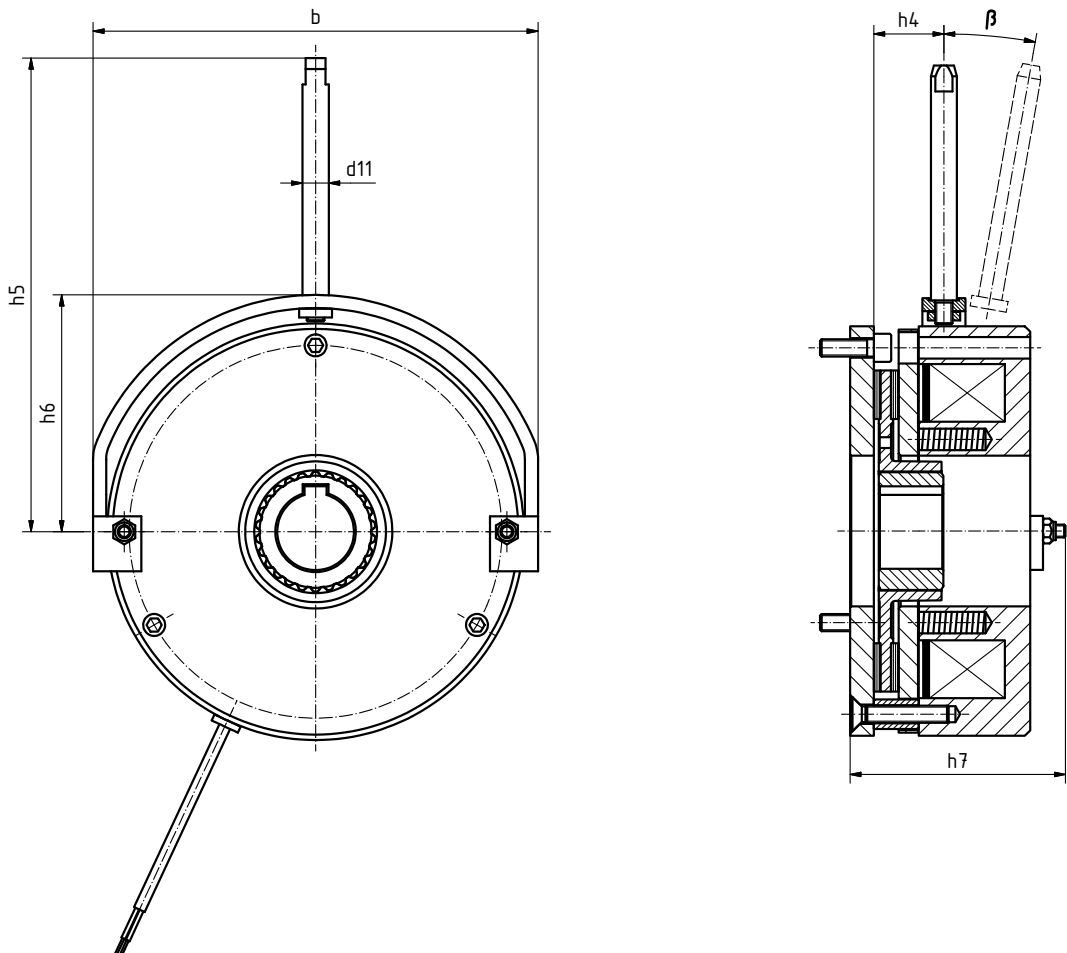

Size	h	h1	h2	h3	h4	h5	h6	h7	l	l1	l2 ⁽⁵⁾	s _{LN} ± 0.1	s _{Lmax} at M _K	s _{Lmax} at M _{Kmax}	α	β	m [kg]
06	41.3	45.3	7	6	15.8	107	49	49.7	18	400	6	0.2	0.6	0.4	25°	10°	1.1
08	49.8	54.8	8.5	7	16.3	118	59	57.1	20	400	9	0.2	0.6	0.45	25°	10°	1.9
10	56.4	61.5	10	8	27.4	142	74	65.2	20	400	12	0.3	0.7	0.5	25°	10°	3.8
12	62.4	67.4	10	8	29.4	162	84	71.2	25	400	12	0.3	0.8	0.5	25°	10°	5.7
14	77.3	83.3	13	11	33	201	94	89	30	400	14	0.3	0.8	0.5	25°	10°	8.6
16	83.5	89.5	13.3	11	37.5	250	108	99.9	30	600	14	0.3	0.9	0.6	25°	10°	12

(1) Power of coil at 20°C in watt, aberration up to +10% according to the chosen connection voltage possible

(2) Pilot bored without keyway

(3) Standard keyway in accordance with DIN 6885/1-P9

(4) Ø 38mm, keyway in accordance with DIN 6885/3-P9

(5) Please contact the manufacturer if a different mounting surface made from steel is used

Standard voltages: 24 V DC and 205 V DC, other voltages on request

M_K: Rated torque of the brake in Nm, based on Δn = 100 rpm


Caution! The braking torque depends on the speed

M_{Kmax}: Holding brake with emergency stop

Dimensions in mm

Spring-applied brake BFK457-06... 16


Basic design: Stator complete with rotor

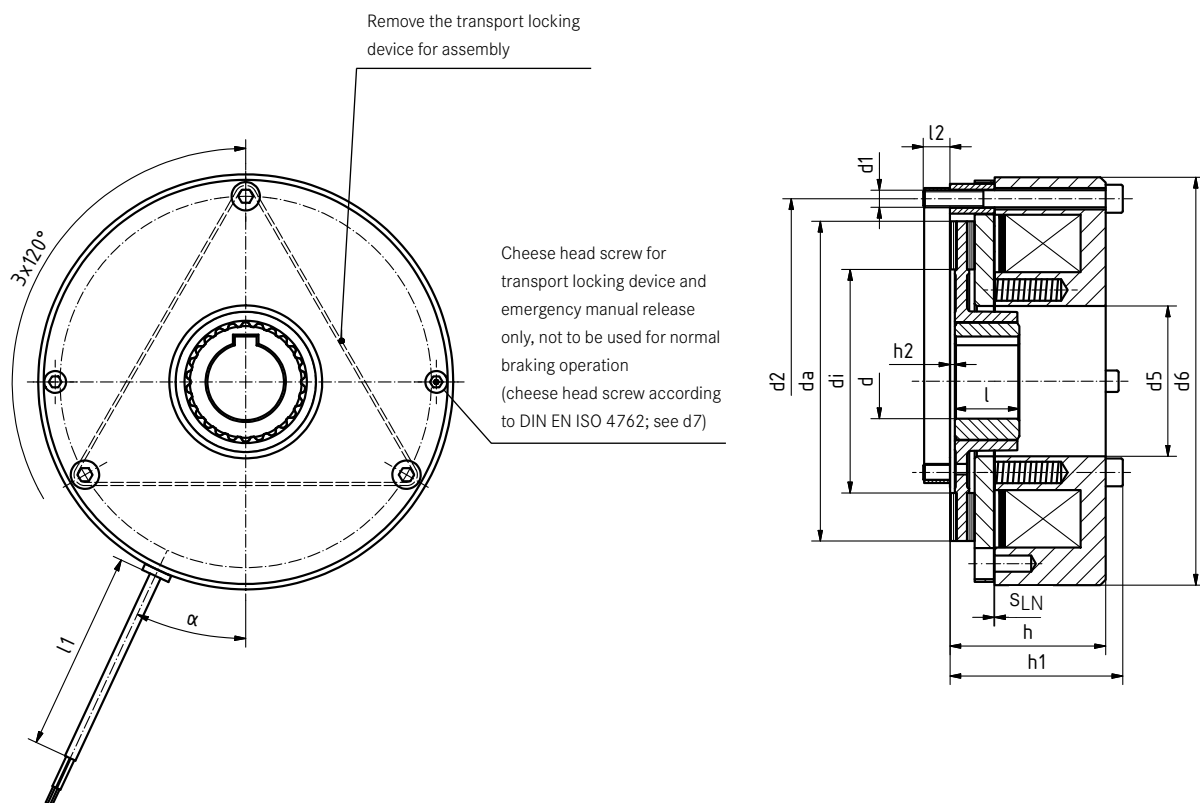

Size	M_K [Nm]	M_{Kmax} [Nm]	$P_N^{(1)}$ [W]	b	dI7 spec. (2)	dH7 standard (3)	d1	d2	d5	d6	d7	d11	da	di
06	4	6	20	90	10	11/12/14/15	3xM4	72	31	84	M4x30	8	60	40
08	8	12	25	108	10	11/12/14/15/20	3xM5	90	41.5	102	M5x35	8	77	57
10	16	23	30	137	10	15/20	3xM6	112	44	130	M5x40	10	95	66
12	32	46	40	157	14	20/25	3XM6	132	52	150	M5x45	10	115	70
14	60	95	50	174	14	20/25/30	3XM8	145	60	165	M6x55	12	124	80
16	80	125	55	203	15	25/30/35/38 (4)	3xM8	170	70	190	M6x60	12	149	104

Size	M_K	Max. speed n_{max}	Max. permissible friction work per switching cycle Q_E	Transition operating frequency S_{shue}	Operating times [ms] with standard rated torque and S_{LN} Nenn DC switching				Moment of inertia of rotor
	[Nm]	[r/min]	[J]	[h ⁻¹]	t_{11}	t_{12}	t_1	Release t_2	[kgcm ²]
06	4	6000	3000	79	29	19	48	37	0.13
08	8	5000	7500	50	60	35	95	42	0.45
10	16	4000	12000	40	35	60	95	100	2.00
12	32	3600	24000	30	45	53	98	135	4.50
14	60	3600	30000	28	50	57	107	240	6.30
16	80	3600	36000	27	71	50	121	275	15.00

Basic design with hand release

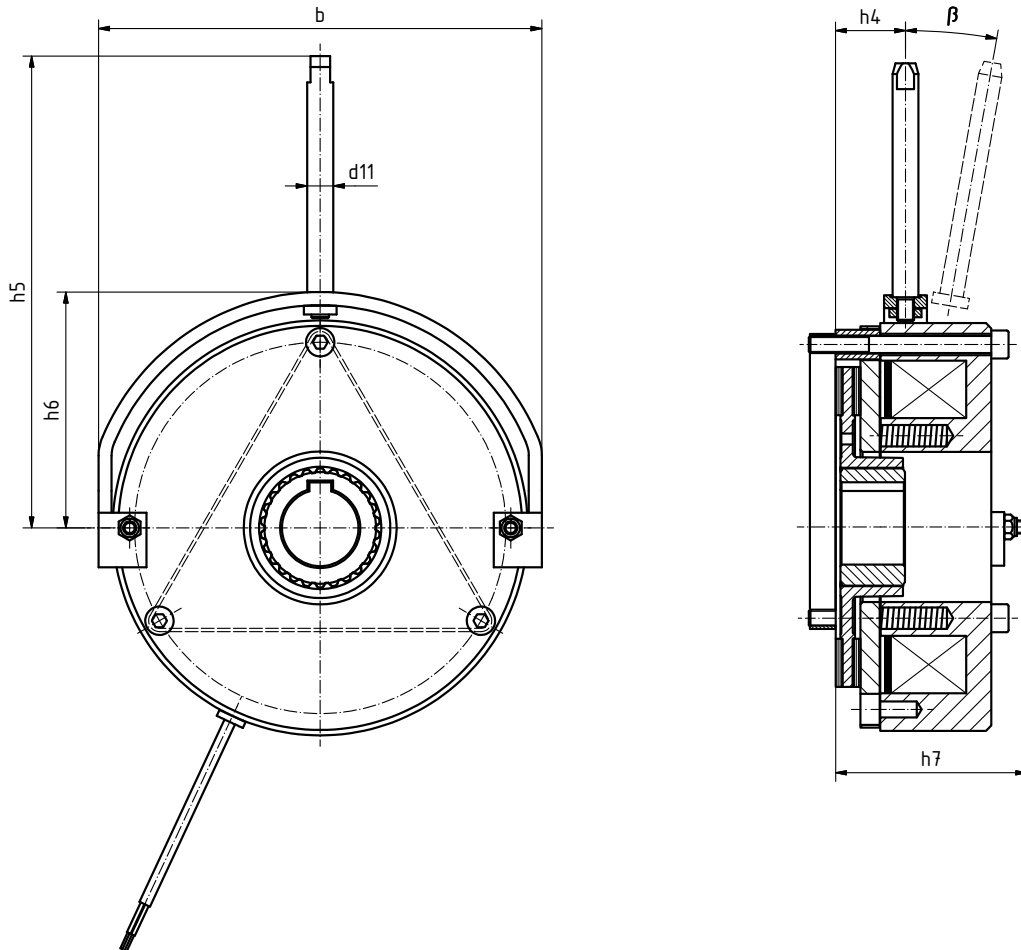

Size	h	h1	h2	h4	h5	h6	h7	l	l1	I2 ⁽⁵⁾ ± 0.1	sLN at M _K	sLmax at M _{Kmax}	sLmax	α	β [kg]	m
06	35.3	39.3	1	15.8	107	49	43.7	18	400	9.7	0.2	0.6	0.4	25°	10°	0.9
08	42.8	47.8	1.5	16.3	118	59	50.1	20	400	12.2	0.2	0.6	0.45	25°	10°	1.5
10	48.4	54.5	2	27.4	142	74	57.2	20	400	11.5	0.3	0.7	0.5	25°	10°	3
12	54.4	60.4	2	29.4	162	84	63.2	25	400	11	0.3	0.8	0.5	25°	10°	4.7
14	66.3	74.3	2	33	201	94	78	30	400	14	0.3	0.8	0.5	25°	10°	7.1
16	72.5	80.5	2.25	37.5	250	108	88.9	30	600	12.5	0.3	0.9	0.6	25°	10°	10

■ (1) Power of coil at 20°C in watt, aberration up to +10% according to the chosen connection voltage possible

■ (2) Pilot bored without keyway

■ (3) Standard keyway in accordance with DIN 6885/1-P9

■ (4) Ø38mm, keyway in accordance with DIN 6885/3-P9

■ (5) Please contact the manufacturer if a different mounting surface made from steel is used

■ Standard voltages: 24 V DC and 205 V DC, other voltages on request

■ M_K: Rated torque of the brake in Nm, based on Δn = 100 rpm


Caution! The braking torque depends on the speed

■ M_{Kmax}: Holding brake with emergency stop

■ Dimensions in mm

Double spring-applied brake BFK457-06... 16

Low-noise design < 50 dbA

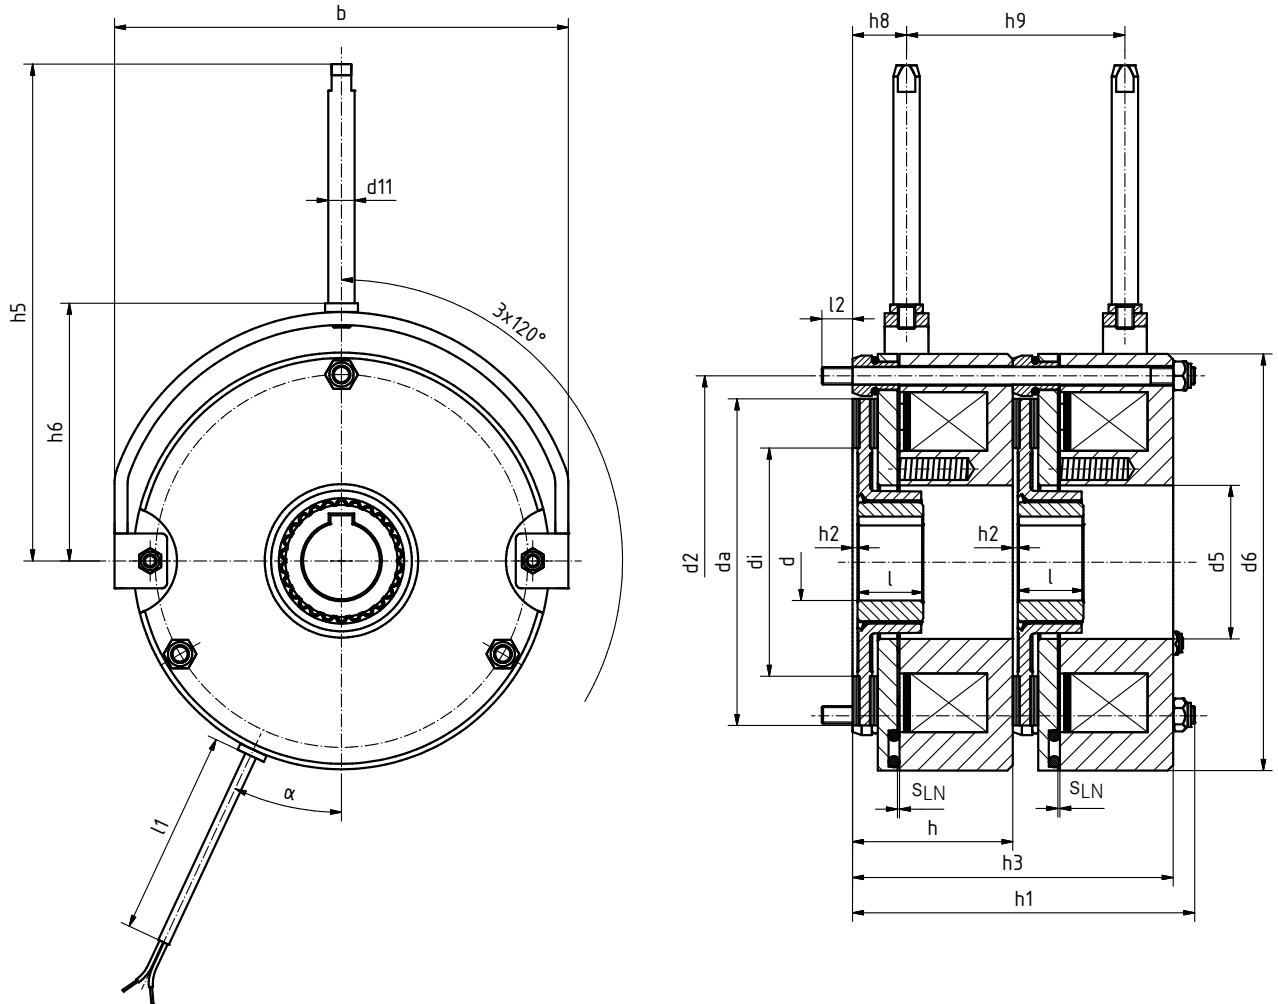

Features double spring-applied brake

- Basic design without flange
- Noise-reduced aluminium rotor
- Noise-reduced armature plate
- The brake is delivered in parts

Size	M_K [Nm]	$P_N^{(1)}$ [W]	b	dJ7 spec. (2)	dH7 standard (3)	d1	d2	d5	d6	d11	da	di	h	h1
06	2x4	20	90	10	11/12/14/15	3xM4	72	31	84	8	60	40	35.3	75.5
08	2x8	25	108	10	11/12/14/15/20	3xM5	90	41.5	102	8	77	57	42.8	90.5
10	2x16	30	137	10	15/20	3xM6	112	44	130	10	95	66	48.4	102.9
12	2x32	40	157	14	20/25	3xM6	132	52	150	10	115	70	54.4	114,7
14	2x60	50	174	14	20/25/30	3xM8	145	60	165	12	124	80	66.3	140,5
16	2x80	55	203	15	25/30/35/38 (4)	3xM8	170	70	190	12	149	104	72.5	153,1

(1) Power of coil at 20°C in watt, aberration up to +10% according to the chosen connection voltage possible

(2) Pilot bored without keyway

(3) Standard keyway in accordance with DIN 6885/1-P9

(4) Ø38mm, keyway in accordance with DIN 6885/3-P9

(5) Please contact the manufacturer if a different mounting surface made from steel is used

Standard voltages: 24 V DC and 205 V DC, other voltages on request

M_K : Rated torque of the brake in Nm, based on $\Delta n = 100$ rpm

Caution! The braking torque depends on the speed

Dimensions in mm

General Information

INTORQ brakes are designed so that the stated rated torques are reliably attained after a short run-in operation.

Given the fluctuating properties of the organic friction linings used and changing environmental conditions, there may however be deviations from the stated braking torques. Appropriate safety factors in the design must take this into account.

An increased breakaway torque may in particular be experienced in damp conditions and with changing temperatures after long downtimes.

The braking torque should be checked when using the brake on the customer's friction surfaces. If the brake is being used solely as a holding brake without any dynamic load, the friction lining must be reactivated regularly.

Size	h2	h3	h5	h6	h8	h9	l	l1	l2 ⁽⁵⁾	s _{LN} ± 0.1	s _{Lmax at} M _K	α	m [kg]
06	1	70.6	109	54	13	44	18	400	6	0.2	0.5	25°	1.9
08	1.5	85.6	121.7	62	12.7	63.3	20	400	9	0.2	0.5	25°	3.2
10	2	96.8	147	84	16	70	20	400	11	0.3	0.5	25°	6.4
12	2	108.8	166	93	18.3	78.4	25	400	11	0.3	0.75	25°	9.8
14	2	132.6	186	106	22	91.5	30	400	14	0.3	0.75	25°	14.8
16	2.25	145	230	120.5	24.5	100	30	600	14	0.3	0.75	25°	21.0

Model overview

Spring-applied brake BFK457

Size 01 02 03 04 05

Compact: Fully assembled with rotor and flange

06 08 10 12 14 16

Basic: Stator with rotor

Compact: Fully assembled with rotor and flange

Noise-reduced: Double spring-applied brake in low-noise design <50 dba

Spannung 24 V DC 205 V DC (other voltages on request)

Braking torque

	01	02	03	04	05	06	08	10	12	14	16
	0,12	0,25	0,5	1	2	4	8	16	32	60	80
	0,24	0,5	1,0	2,0	4,0	6	12	23	46	95	125

Hand release Assembled (except size 01)

Hub Bore diameter in mm (see technical data, tables)



Compact, sizes 01 and 02



Hand release available as an option



Noise-reduced as a double spring-applied brake <50dB(A)

PRECISION. SAFETY. MOTION.

› You can find more information on our products, as well as catalogues and operating instructions available for download, on our website at www.intorq.com



INTORQ GmbH & Co. KG

Germany

Postfach 1103, D-31849 Aerzen, Germany
Wülmser Weg 5, D-31855 Aerzen, Germany

Tel, Head office: +49 5154 70534-0
Tel, Sales department: +49 5154 70534-222
Fax: +49 5154 70534-200
E-mail info@intorq.de

INTORQ US INC.

USA

300 Lake Ridge Drive SE
Smyrna, GA 30082, USA

Tel: +1 678 236-0555
Fax: +1 678 309-1157
E-mail info@us.intorq.com

INTORQ (Shanghai) CO., LTD

China

No. 600, Xin Yuan Nan Road,
Building No. 6 / Zone B
Nicheng town, Pudong
Shanghai, China 201306

Tel: +86 21 20363-810
Fax: +86 21 20363-805
E-mail info@cn.intorq.com

INTORQ India Pvt. Ltd.

India

Plot No. E-7/3, Chakan
Industrial Area, Phase 3,
Nighoje, Taluka-Khed,
Pune, 410501 Maharashtra

Tel: +91 21 3562-5500
E-mail info@intorq.in